



(11) **EP 1 659 431 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
09.05.2012 Bulletin 2012/19

(51) Int Cl.:
G02B 6/12^(2006.01) G02B 6/12^(2006.01)
B82Y 20/00^(2011.01)

(21) Application number: **04772075.0**

(86) International application number:
PCT/JP2004/012114

(22) Date of filing: **24.08.2004**

(87) International publication number:
WO 2005/022219 (10.03.2005 Gazette 2005/10)

(54) **TWO-DIMENSIONAL PHOTONIC CRYSTAL MULTIPLEXER/DEMULTIPLEXER**
ZWEIDIMENSIONALER MULTIPLEXER/DEMULTIPLEXER MIT PHOTONISCHEM KRISTALL
MULTIPLEXEUR/DEMULTIPLEXEUR BIDIMENSIONNEL

(84) Designated Contracting States:
DE FR GB

(30) Priority: **29.08.2003 JP 2003307654**

(43) Date of publication of application:
24.05.2006 Bulletin 2006/21

(73) Proprietors:
• **Japan Science and Technology Agency**
Kawaguchi-shi,
Saitama 332-0012 (JP)
• **Sumitomo Electric Industries, Ltd.**
Osaka-shi, Osaka 541-0041 (JP)
Designated Contracting States:
FR GB

(72) Inventors:
• **NODA, Susumu**
Uji-shi,
Kyoto 611-0011 (JP)
• **ASANO, Takashi,**
2-108 Katsura-Daini-Goudoushukusha
Kyoto-shi,
Kyoto 615-8104 (JP)
• **AKAHANE, Yoshihiro,**
Sumitomo Electric Ind., Ltd.
Itami-shi,
Hyogo 664-0016 (JP)

(74) Representative: **Hoeger, Stellrecht & Partner**
Patentanwälte
Uhlandstrasse 14c
70182 Stuttgart (DE)

(56) References cited:
WO-A-98/57207 WO-A1-01/20379
WO-A1-98/57207 WO-A1-2004/068205
FR-A1- 2 841 658 JP-A- 62 100 706
US-A1- 2002 191 905 US-A1- 2003 011 775

- **CHONGJUN JIN ET AL: "Reflectionless Multichannel Wavelength Demultiplexer in a Transmission Resonator Configuration" IEEE JOURNAL OF QUANTUM ELECTRONICS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 39, no. 1, January 2003 (2003-01), XP011065336 ISSN: 0018-9197**
- **SUGIMOTO, Y. ET AL.: '29a-YN-5 Photonic kessho ni yoru Ketsugo Seigyogata Hokosei Ketsugoki (CC-DC) no Sekkei to sono Kogaku Tokusei' 2003 NEN SHUNKI DAI 50 KAI OYO BUTSURIGAKU KANKEI RENGU KOENKAI KOEN YOKOSHU vol. 3, 27 March 2003, page 1137, XP002985742**
- **AKAHANE, Y. ET AL.: 'Design of a channel drop filter by using a donor-type cavity with high-quality factor in a two-dimensional photonic crystal slab' APPLIED PHYSICS LETTERS vol. 82, no. 9, 03 March 2003, pages 1341 - 1343, XP001163004**
- **SONG, B.S. ET AL.: 'Photonic devices based on in-plane hetero photonic crystals' SCIENCE vol. 300, no. 5625, 06 June 2003, page 1537, XP002983852**
- **SONG B.S. ET AL.: '29a-YN-4 Mennai Hetero Koza no Kyokaimen o Mochiita Hacho Gobunpa Koritsu no Kojo' 2003 NEN SHUNKI DAI 50 KAI OYO BUTSURIGAKU KANKEI RENGU KOENKAI KOEN YOKOSHU vol. 3, 27 March 2003, page 1137, XP002985743**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 659 431 B1

- AKAHANE, Y. ET AL.: '29a-YN-9 2 Jigen Photonic Kessho Slab-ten Kekkan Kyoshinki no Koshiten Shift ni yoru Q-chi no ohaba na Kojo' 2003 NEN SHUNKIDAI 50 KAI OYO BUTSURIGAKU KANKEI RENGU KOENKAI KOEN YOKOSHU vol. 3, 27 March 2003, page 1138, XP002985744
- AKAHANE, Y. ET AL.: 'Ip-ZM-3 2 Jigen Photonic Kessho ni yoru Hacho Gobunpa Device - Bunpa Spectrum no Flat Top-ka Sekkei' 2003 NEN SHUKI DAI 64 KAI EXTENDED ABSTRACTS; THE JAPAN SOCIETY OF APPLIED PHYSICS vol. 3, 30 August 2003, page 944, XP002985745
- SUGIMOTO, Y. ET AL.: 'Design, fabrication, and characterization of coupling-strength-controlled directional coupler based on two-dimensional photonic-crystal slab waveguides' APPLIED PHYSICS LETTERS vol. 83, no. 16, 20 October 2003, pages 3236 - 3238, XP001190382
- AKAHANE, Y. ET AL.: 'High-Q photonic nanocavity in a two-dimensional photonic crystal' NATURE vol. 425, 30 October 2003, pages 944 - 947, XP002985746
- LITTLE, B.E. ET AL.: 'Monitoring resonator channel dropping filter' JOURNAL OF LIGHTWAVE TECHNOLOGY vol. 15, no. 6, June 1997, pages 998 - 1005, XP000700611

Description

TECHNICAL FIELD

5 **[0001]** The present invention relates to a two-dimensional photonic crystal multiplexer/demultiplexer used for wavelength division multiplexing communication or other techniques. Particularly, it relates to a technique for improving the multiplexing/demultiplexing characteristics.

BACKGROUND ART

10 **[0002]** In recent years, the techniques used in wavelength division multiplexing (WDM) transmission systems have made remarkable progress. WDM is a technique for transmitting multiple pieces of information by propagating plural wavelengths (or frequencies) of light through a single transmission line, with each wavelength of light carrying a different signal (Note: the term "light" used in this specification includes electromagnetic waves). This technique requires an optical multiplexer and an optical demultiplexer, or wavelength filters, for mixing multiple wavelengths of light at the inlet of the transmission line and then separating the mixed light into each wavelength of light at the outlet. An example of conventional demultiplexers is arrayed waveguide grating. However, to adequately decrease the loss of light, arrayed waveguide gratings currently used are somewhat oversized, as large as roughly several square centimeters.

15 **[0003]** To increase the capacity of the transmission system and reduce the size of the devices used in it, developments of multiplexers, demultiplexers and wavelength filters using photonic crystals are underway. A photonic crystal is a functional material having a cyclic distribution of refractive index, which provides a band structure with respect to the energy of light. This device is particularly featured in that it has an energy region (called the photonic bandgap) that does not allow the propagation of light. Introduction of an appropriate defect into the distribution of refractive index in the photonic crystal creates an energy level (called the defect level) due to the defect within the photonic bandgap. This allows only a specific wavelength of light having an energy corresponding to the defect level to exist within the wavelength range corresponding to the energy levels included in the photonic bandgap. Forming a linear defect in the crystal provides a waveguide, and forming a point-like defect in the crystal provides a resonator. The shape of the defect determines a wavelength, called the resonance wavelength, at which the resonance of light takes place.

20 **[0004]** Non-Patent Document 1 discloses the result of a computer simulation of a photonic crystal composed of infinitely long cylindrical elements made of a high refractive index material and arranged in a square lattice pattern. This construction allows light to be controlled by the photonic bandgap within a plane parallel to the square lattice. However, it does not enable the control of light in the direction perpendicular to the aforementioned plane. Photonic crystals having such a construction are impractical.

25 **[0005]** Patent Document 1 discloses a photonic crystal having a plate-shaped body in which plural areas having a refractive index different from that of the body (called the "modified refractive index area" hereinafter) are cyclically arranged to create a cyclic distribution of refractive index. This construction can control light within the body because a photonic bandgap is present within the plane of the body and the difference in refractive index between the body and the surrounding air confines light within the body in the direction perpendicular to the body. In this construction, a waveguide is formed by eliminating the modified refractive index areas along a line ([0025], Fig. 1), and a point-like defect is formed by eliminating the modified refractive index areas within a point-like region ([0029], Fig. 1). As an embodiment, Patent Document 1 shows a two-dimensional photonic crystal having modified refractive index areas, each consisting of a cylindrical hole, cyclically arranged in a triangular lattice pattern, where the diameter of one of the cylindrical holes located in the proximity of the waveguide is increased to be a point-like defect.

30 US-A1-2003/0011775 discloses a two-dimensional photonic crystal multiplexer/demultiplexer, which is characterized by:

- 35
- 40
- 45
- a) a slab-shaped body;
 - b) a plurality of areas arranged in a lattice pattern with a predetermined cycle within the body, where a refractive index of the aforementioned areas differs from that of the body;
 - c) a first optical input/output section consisting of a waveguide formed in the body, where the waveguide is made of a linear defect of the modified refractive index areas;
 - d) a second optical input/output section formed in the body; and
 - e) two or more point-like defect resonators composed of point-like defects having substantially the same resonance wavelength and arranged in series along the first and second optical input/output sections between the sections, each point-like defect consisting of a point-like region devoid of the modified refractive index areas.

50

55 FR-A1-2841658 discloses the same construction as that of US-A1-2003/0011775.

WO-A1-98/57207 discloses a two-dimensional photonic crystal multiplexer/demultiplexer, which is characterized by: two or more point-like defect resonators composed of point-like defects having substantially the same resonance wavelength

and arranged in series in the direction perpendicular to the first and second optical input/output sections between the sections, each point-like defect consisting of a point-like region devoid of the modified refractive index areas.

The article "Reflectionless Multichannel Wavelength Demultiplexer in a Transmission Resonator Configuration" by Chongjun Jin et al., IEEE JOURNAL OF QUANTUM ELECTRONICS, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 39, no. 1, January 2003 (2003-01) (XP-11065336) discloses the second optical input/output sections of point-like defects, where Q-value between the point-like defect and the outside of the crystal is smaller than that of the point-like defect resonators C1. At least, one of the point-like defect resonators C1 is a donor type defect formed by creating a region devoid of the modified refractive index areas.

[0006]

[Non-Patent Document 1] S. Fan et al., "Channel Drop Tunneling through Localized States", Physical Review Letters, (US), American Physical Society, 1998, vol. 80, pp. 960-963

[Patent Document 1] Japanese Unexamined Patent Publication No. 2001-272555 ([0025], [0029], Fig. 1)

[0007] This type of two-dimensional photonic crystal can function as a demultiplexer for separating a ray of light whose wavelength equals to the resonance wavelength of the point-like defect from the light including plural wavelengths superimposed and propagating through the waveguide, and for emitting the light through the point-like defect to the outside. It can also function as a multiplexer that introduces, from the outside of the crystal, a ray of light whose wavelength equals to the resonance wavelength of the point-like defect into superimposed light propagating through the waveguide. Thus, one and the same two-dimensional photonic crystal can function as a multiplexer and as a demultiplexer. Such a two-dimensional photonic crystal is called the "multiplexer/demultiplexer" in this specification. Creating plural point-like defects having different shapes in the proximity of the waveguide provides a multiplexer/demultiplexer in which each point-like defect multiplexes or demultiplexes a ray of light having a different wavelength. In the case where the plural wavelengths of light each carries a different signal, it is possible to extract a specific signal from the transmission line (i.e. the waveguide) with the demultiplexer or introduce a specific signal into the transmission line with the multiplexer.

[0008] In the above-described multiplexer/demultiplexer, the point-like defect multiplexes or demultiplexes not only the ray of light having its resonance wavelength, λ_0 , but also other rays of light included within a certain wavelength range around the resonance wavelength λ_0 by certain percentages. In the case of the above-described conventional two-dimensional photonic crystal multiplexer/demultiplexer, the multiplex/demultiplex spectrum takes the form of a Lorentz function around the resonance wavelength λ_0 , as shown in Fig. 1. A multiplex/demultiplex spectrum expressed by a Lorentz function has a sharp peak; the value of the multiplex/demultiplex spectrum rapidly falls as the distance from the resonance wavelength λ_0 increases, and it forms a long tail as the distance becomes much larger. Such a multiplex/demultiplex spectrum expressed by a Lorentz function is accompanied by two problems to be solved with respect to the multiplexing/demultiplexing operations.

[0009] The first problem results from the sharpness of the peak of the multiplex/demultiplex spectrum. An aged deterioration or a temperature change in the system used may cause an error in the wavelength of light propagating through the waveguide or in the resonance wavelength of the multiplexer/demultiplexer. This will cause a discrepancy $\delta\lambda$ between the resonance wavelength λ_0 of the point-like defect (i.e. the peak wavelength of the multiplex/demultiplex spectrum) and the wavelength λ_1 of the light propagating through the waveguide. As can be understood from Fig. 1, even a very small discrepancy will make the value of the multiplex/demultiplex spectrum at λ_1 considerably smaller than at λ_0 . This means that even a slight change in the wavelength can deteriorate the multiplexing/demultiplexing efficiency if the multiplex/demultiplex spectrum is expressed by a Lorentz function.

[0010] The second problem results from the long tail of the multiplex/demultiplex spectrum. Presence of such a long tail will allow rays of light having wavelengths far from λ_0 to be undesirably mixed, thus causing a noise. Also, the tail may overlap the wavelength of the signal of an adjacent channel, causing a crosstalk between the two signals.

DISCLOSURE OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

[0011] Thus, the present invention intends to provide a two-dimensional photonic crystal multiplexer/demultiplexer according to claim 1 demultiplexer capable of preventing the multiplexing/demultiplexing efficiency from deteriorating due to an error of the input signal or the resonance wavelength, and also suppressing the crosstalk caused by the tail of the multiplex/demultiplex spectrum, each problem being attributable to the peak shape of the multiplex/demultiplex spectrum of each point-like defect.

MEANS FOR SOLVING THE PROBLEMS

[0012] To solve the above-described problems, the present invention provides a two-dimensional photonic crystal multiplexer/demultiplexer according to claim 1.

[0013] The two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention has a body consisting of a slab, or a thin plate whose size in the in-plane direction is much larger than its thickness. This body is provided with areas (i.e. the modified refractive index areas) having a refractive index different from that of the body and being arranged in a lattice pattern with a predetermined cycle. This construction provides a two-dimensional photonic crystal having a photonic bandgap that prevents rays of light within a specific wavelength band determined by the aforementioned cycle from passing through the body along the in-plane direction. Within the two-dimensional photonic crystal having the above-described structure, light is totally reflected at the boundary between the body and the outside (e.g. the air) due to the difference in refractive index between them. Thus, the light is prevented from escaping from the body to the outside. Examples of the lattice pattern for arranging the modified refractive index areas are triangular lattice patterns and square lattice patterns. The refractive index of the modified refractive index areas may be higher or lower than that of the body. The modified refractive index areas may be holes arranged in a cyclic pattern in the body. This construction is preferable because it produces a large difference in refractive index between the areas and the body. Another point is that it is easy to manufacture.

[0014] The body is provided with a first optical input/output section consisting of a waveguide made of a linear defect of the modified refractive index areas. In a typical example, the waveguide is formed by eliminating the modified refractive index areas, or by omitting the modified refractive index areas, along a line. The waveguide functions as an optical input section for introducing light including plural wavelengths superimposed into the demultiplexer if it is used as a demultiplexer, or as an optical output section for extracting light including plural wavelengths superimposed to the outside if it is used as a multiplexer.

[0015] The body is also provided with a second optical input/output section. This section functions as an optical output section for extracting light having a specific wavelength to the outside of the crystal if it is used as a demultiplexer, or as an optical input section for introducing light having a specific wavelength into the multiplexer if it is used as a multiplexer. The second optical may be either a waveguide or a point-like defect. A second optical input/output section taking the form of a point-like defect can be formed by creating a point-like region devoid of the modified refractive index areas. The point-like defect can be obtained by making the size of one of the modified refractive index areas different from that of the others or by eliminating one of these areas. It is also possible to make the point-like defect composed of two or more modified refractive index areas adjacent to each other. In this case, the set of modified refractive index areas is regarded as a single point-like defect. To extract light from the crystal to the outside or introduce light into the multiplexer as described earlier, it is desirable to make the Q-value between the point-like defect and the outside of the crystal smaller than that of the point-like defect resonators to be described later. Q-value is an index that represents the performance of a resonator, which, by definition, is inversely proportional to the percentage of the amount of energy leaking from the resonators per unit of time. Accordingly, a larger Q-value will reduce the amount of energy of light leaking from the resonator. A second optical input/output section taking the form of a waveguide can be formed by the same method as used for forming the waveguide of the first optical input/output section. It is also possible to add one or more point-like defects in the proximity of the waveguide of the second optical input/output section so that light can be extracted from the waveguide via the point-like defect to the outside of the crystal, or introduced into the multiplexer through the point-like defect.

[0016] Between the first and second input/output sections, two or more point-like defect resonators having substantially the same resonance wavelength are arranged in series. For example, they can be arranged along the direction perpendicular to the waveguide of the first optical input/output section, along a direction at an angle to the waveguide, or in a zigzag pattern. The point-like defect resonators can be formed by the same method as used for forming the point-like defect of the aforementioned optical input/output section.

[0017] The point-like defect resonators, which do not directly introduce or emit light from or to the outside, should be preferably designed so that it allows only a small amount of light to leak to the outside of the crystal. A donor type defect formed by creating a region devoid of the modified refractive index areas, or by omitting the modified refractive index areas, is more suitable for the point-like defect resonators than an acceptor type defect obtained by increasing the size of one of the modified refractive index areas because the donor type yields a higher Q-value (Q_v) between each point-like defect resonator and the outside of the crystal than that obtained with the acceptor type. The value Q_v can be further increased by shifting the modified refractive index area within the proximity of the point-like defect resonators from the position determined by the arrangement cycle. Suppose that the point-like defect formed by eliminating three modified refractive index areas located adjacent to each other on a straight line. Then, $Q_v \sim 5200$ if there is no shift of the modified refractive index areas, whereas $Q_v \sim 45000$ if two modified refractive index areas located closest to the point-like defect are shifted.

[0018] Light is transmitted between the first optical input/output section and the point-like defect resonator closest to

the first optical input/output section, between each pair of adjacent point-like defect resonators, and between the second optical input/output section and the point-like defect resonator closest to the second optical input/output section. The Q-value determined by the components concerned and their distance will be an index of the transmission of light.

[0019] The two-dimensional photonic crystal optical multiplexer/demultiplexer constructed as described above functions as either a multiplexer or a demultiplexer as follows. Firstly, the operation of a demultiplexer for separating a ray of light having a predetermined wavelength from light including plural wavelengths superimposed is described. When the superimposed light is propagated through the waveguide of the first optical input/output section, the point-like defect resonator closest to the waveguide traps only a ray of light whose wavelength equals to the resonance wavelength of the point-like defect resonators from the superimposed light. The trapped light is then successively captured by the adjacent point-like defects and finally reaches the second optical input/output section, which emits the light to the outside of the crystal. In the case of a multiplexer, a ray of light whose wavelength equals to the resonance wavelength of the point-like defect resonators is introduced into the second optical input/output section and then successively trapped by the point-like defect resonators in the opposite order. The trapped light finally reaches the waveguide of the first optical input/output section, where it is mixed into the superimposed light propagating through the waveguide.

[0020] The spectrum of the light multiplexed or demultiplexed by the multiplexer/demultiplexer according to the present invention is examined. This examination assumes that there are two point-like defect resonators located between the two optical input/output sections, as shown in Fig. 2A. For comparison, the multiplex/demultiplex spectrum obtained with a conventional multiplexer/demultiplexer having only one point-like defect resonator between the two optical input/output sections, as shown in Fig. 2B, is also examined.

[0021] In Fig. 2A, two point-like defect resonators 13 and 14, both having a resonance wavelength λ_0 and a resonance frequency $\omega_0 (=2\pi c/\lambda_0$, where c is the speed of light), are located between a first optical input/output section 11 consisting of a waveguide and a second optical input/output section 12 consisting of another waveguide formed in the same manner as the first one. Let Q_{in} denote both the Q-value between the first optical input/output section and the point-like defect resonator closest to that section and the Q-value between the second optical input/output section and the point-like defect resonator closest to that section. Also, let Q_v denote the Q-value between each of the point-like defect resonators and the outside of the crystal. The present analysis uses attenuation constants τ_e and τ_0 defined as $\tau_e=2Q_{in}/\omega_0$ and $\tau_0=2Q_v/\omega_0$. The mutual coupling coefficient between the two point-like defect resonators is denoted by μ . Letting a_L and a_R denote the amplitudes of the light resonating at the two resonators observed under the condition that no waveguide is present, μ can be derived from the following equations: $da_L/dt=(j\omega_0-1/\tau_0)a_L-j\mu a_R$ and $da_R/dt=(j\omega_0-1/\tau_0)a_R-j\mu a_L$. Using these parameters, a calculation based on the mode coupling theory gives the multiplex/demultiplex spectrum $I(\omega)$ as follows:

$$I(\omega) = \frac{1}{\frac{\tau_e^2}{\mu^2} \left[\left\{ \left(\frac{1}{\tau_0} + \frac{1}{\tau_e} \right)^2 + \mu^2 \right\}^2 + 2 \left\{ \left(\frac{1}{\tau_0} + \frac{1}{\tau_e} \right)^2 - \mu^2 \right\} (\omega - \omega_0)^2 + (\omega - \omega_0)^4 \right]} \quad (1)$$

[0022] The conventional multiplexer/demultiplexer shown in Fig. 2B has only one point-like defect resonator 17 between the first optical input/output section 15 consisting of a waveguide and the second optical input/output section 16 consisting of another waveguide having the same structure. In this case, the multiplex/demultiplex spectrum is calculated as follows:

$$I(\omega) = \frac{1}{\left(\frac{\tau_e}{\tau_0} + 2 \right)^2 + \tau_e^2 (\omega - \omega_0)^2} \quad (2)$$

[0023] Equation (2) is an expression of the Lorenz type multiplex/demultiplex spectrum described earlier; it has a term of frequency ω^2 in the denominator. In contrast, the denominator in equation (1) includes an ω^4 term in addition to an ω^2 term. Compared to the ω^2 term, the ω^4 term helps the value of the multiplex/demultiplex spectrum to increase within a range close to the resonance frequency ω_0 and decrease within a range far from ω_0 . As a result, in the multiplexer/demultiplexer according to the present invention, the multiplex/demultiplex spectrum takes (i) larger values within a range close to ω_0 and (ii) smaller values within a range far from ω_0 , compared to that of the conventional multiplexer/demultiplexer.

[0024] If $\mu\mu^2=(1/\tau_0+1/\tau_e)^2$, the ω^2 term in the denominator in equation (1) equals to zero, meaning that the ω^4 term works most effectively.

[0025] Figs. 3A and 3B each show examples of multiplex/demultiplex spectrums: one expressed by equation (1) with $\mu^2=(1/\tau_0+1/\tau_e)^2$ and the other expressed by equation (2). The solid lines correspond to equation (1) and the broken lines correspond to equation (2). The abscissa indicates the wavelength, and the ordinate indicates the multiplex/demultiplex spectrum $I(\lambda)$ in decibels: $I_{dB}=10\times\log[I(\lambda)/I(\lambda_0)]$. The resonance wavelength λ_0 is 1550 nm. Fig. 3B is an enlarged view of Fig. 3A. From the shapes of these multiplex/demultiplex spectrums, it is clear that the two-dimensional photonic crystal optical multiplexer/demultiplexer according to the present invention yields the following effects:

(i) The multiplex/demultiplex spectrum takes larger values within a range close to ω_0 . Even if the frequency ω_1 of the light propagating through the waveguide is shifted from the resonance frequency ω_0 for some reason, such as an error in the wavelength of the light propagating through the waveguide or an error of the resonator, the multiplex/demultiplex spectrum maintains a large value at frequency ω_1 . Therefore, the multiplexing/demultiplexing efficiency becomes higher than that of the conventional multiplexer/demultiplexer. In case (i), the multiplex/demultiplex spectrum becomes flattened at around the resonance frequency ω_0 , as shown in Figs. 3A and 3B. In the following description, the flattened shape of the multiplex/demultiplex spectrum is referred to as the "flattop."

(ii) The multiplex/demultiplex spectrum takes smaller values within a range far from ω_0 . This prevents undesired wavelengths of light from being mixed into the multiplexed or demultiplexed light and thereby causing a noise. It also suppresses the crosstalk caused by the overlapping of the signal frequency of an adjacent channel.

[0026] For the multiplexer/demultiplexer, it is desirable that the value of the multiplex/demultiplex spectrum at a frequency shifted from the resonance frequency ω_0 by 0.005% is equal to or larger than -1 dB (or 79%) of the value at ω_0 . To satisfy this condition, the ratio of μ^2 to $[(\omega_0/2)\times(1/Q_{in}+1/Q_v)]^2$, i.e. $\mu^2/[(\omega_0/2)\times(1/Q_{in}+1/Q_v)]^2$, should be preferably 0.2~10. This ratio is called the "coupling ratio" in this specification. If this ratio equals to one, or if $\mu^2=[(\omega_0/2)\times(1/Q_{in}+1/Q_v)]^2$, the term of $(\omega-\omega_0)^2$ in the denominator of equation (1) becomes zero, thus forming the most ideal flattop shape.

[0027] The above-described model illustrated the case where there are two point-like defect resonators and the second optical input/output section is a waveguide. The aforementioned number may be increased from two to N, in which case the term of ω^{2N} will work in the same manner as in the case of the previous model. If the distance between the first and second optical input/output sections is large, it is advantageous to provide more than two point-like defect resonators to connect the two sections. If more than two point-like defect resonators are used, it is necessary to individually design the point-like defect resonators so that they have the same resonance frequency and the same Q-value because each point-like defect resonator has a different relationship with the surroundings. Similarly, if the second optical input/output section is a point-like defect, it is necessary to individually design the point-like defect resonators because the relationship between each point-like defect resonator and the surroundings changes due to the difference between the second optical input/output section and the first optical input/output section (i.e. a waveguide). If there are two point-like defect resonators and the second optical input/output section is a waveguide, it is preferable to symmetrically arrange the two point-like defect resonators and the two optical input/output sections with respect to a point. This arrangement establishes the same relationship between each of the two point-like defect resonators and the surroundings, allowing the use of the same type of point-like defect resonators to obtain the same resonance frequency and the same Q-value. This facilitates the designing of the multiplexer/demultiplexer.

[0028] Even a ray of light whose wavelength equals to the resonance wavelength of the point-like defect resonators can pass by the point-like defect resonators by a certain percentage (transmittance) without being introduced from the first optical input/output section into the resonators. The light is also reflected by the point-like defect resonators by a certain percentage (reflectance). If the second optical input/output section is a waveguide, the light propagates toward both ends of the waveguide. Suppressing these phenomena will improve the multiplexing/demultiplexing efficiency. Therefore, it is preferable to provide the first input/output section and/or the second optical input/output section with a reflecting section for reflecting light whose wavelength equals to the resonance wavelength of the point-like defect resonators. In the first optical input/output section provided with the reflecting section, the light that has not been introduced into the point-like defect resonators but has passed by the resonators will be reflected by the reflecting section and then introduced into the resonators. An appropriate distance setting between the point-like defect resonators and the reflecting section will cause a destructive interference between the light reflected by the point-like defect resonators and the light reflected by the reflecting section, thereby attenuating them. Providing the second optical input/output section with the reflecting section will allow the extraction or introduction of light to be performed only at one end of the waveguide of the second optical input/output section.

[0029] For example, the reflecting section can be constructed as follows: Initially, the body is divided into plural zones (called the "forbidden band zones"), with modified refractive index areas being formed within each forbidden band zones with a different arrangement cycle. Then, the first optical input/output section or the second optical input/output section

is formed so that it passes through all the forbidden band zones. The transmission wavelength band of the waveguide changes depending on the cycle of the modified refractive index areas. Therefore, the cycle of each forbidden band zone can be appropriately determined so that the resonance wavelength of the point-like defect resonators falls within the transmission wavelength band of the waveguide of the first or second optical input/output section in a forbidden band zone including the point-like defect resonators, whereas it is out of the transmission wavelength band of the waveguide in any other forbidden band zone. This construction prevents the light having the resonance wavelength from propagating through the waveguide in the other forbidden band zones; the light will be reflected at the boundary between the forbidden band zone concerned and an adjacent forbidden band zone. Thus, the boundary functions as the reflecting section. A structure having plural forbidden band zones described above is called the "heterostructure" in this specification.

[0030] Fig. 4 shows the first optical input/output section 11 having a first reflecting section 18 and the second optical input/output section 12 having a second reflecting section 19. In this case, the multiplex/demultiplex spectrum $I(\omega)$ is given by:

$$I(\omega) = \frac{4}{\frac{\tau_e^2}{\mu^2} \left[\left\{ \left(\frac{1}{\tau_0} + \frac{1}{\tau_e} \right)^2 + \mu^2 \right\}^2 + 2 \left\{ \left(\frac{1}{\tau_0} + \frac{1}{\tau_e} \right)^2 - \mu^2 \right\} (\omega - \omega_0)^2 + (\omega - \omega_0)^4 \right]} \quad (3)$$

[0031] This spectrum is four times the previous one obtained in the case where no reflecting section is present. Particularly, if $\mu^2 = (1/\tau_0 + 1/\tau_e)^2$ and $Q_{in} \ll Q_v$, the multiplex/demultiplex spectrum at $\omega = \omega_0$ equals to one, meaning that the multiplexing/demultiplexing efficiency is 100%.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032]

Fig. 1 is an illustration for explaining problems relating to the multiplex/demultiplex spectrum of a conventional two-dimensional photonic crystal multiplexer/demultiplexer.

Fig. 2A is a schematic diagram of a two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention, and Fig. 2B is another two-dimensional photonic crystal multiplexer/demultiplexer as a comparative example having only one point-like defect resonator.

Figs. 3A and 3B are graphs showing an example of the multiplex/demultiplex spectrum of a two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention.

Fig. 4 is a schematic diagram of a two-dimensional photonic crystal multiplexer/demultiplexer having a heterostructure.

Fig. 5A is a perspective view and Fig. 5B is a plan view of an embodiment of the two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention.

Fig. 6 is a plan view for explaining the point-like defect of the two-dimensional photonic crystal multiplexer/demultiplexer of the aforementioned embodiment.

Fig. 7 is a schematic diagram of the two-dimensional photonic crystal multiplexer/demultiplexer of the comparative example.

Fig. 8 is a graph showing the result of calculating the multiplex/demultiplex spectrums of the two-dimensional photonic crystal multiplexers/demultiplexers of the aforementioned embodiment and the comparative example, using the mode coupling theory.

Fig. 9 shows the result of calculating the multiplex/demultiplex spectrum of the two-dimensional photonic crystal multiplexer/demultiplexer, using the finite difference time domain (FDTD) method.

Fig. 10 is a plan view of a two-dimensional photonic crystal multiplexer/demultiplexer as another embodiment.

Fig. 11 is a schematic diagram showing another embodiment of the two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention.

Fig. 12 is a plan view of an embodiment of the two-dimensional photonic crystal multiplexer/demultiplexer having a heterostructure.

Fig. 13 is a chart showing the transmission wavelength band of the waveguide of the two-dimensional photonic crystal multiplexer/demultiplexer having a heterostructure.

EXPLANATION OF NUMERALS

[0033]

5	11, 15	First Optical Input/output section
	12, 16	Second Optical Input/output section
	13, 14, 17	Point-Like Defect Resonator
	21	Body
	22	Hole
10	23, 65	Input Waveguide
	24, 66	Output Waveguide
	25, 26, 31, 32, 51, 67, 68	Point-Like Defect

BSET MODE FOR CARRYING OUT THE INVENTION

15 **[0034]** Fig. 5A is a perspective view and Fig. 5B is a plan view of an embodiment of the two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention. The body 21, which is slab shaped, is provided with modified refractive index areas created by boring holes 22 in a triangular lattice pattern with cycle a . This body has an input waveguide 23 and an output waveguide 24, each of which is formed by linearly eliminating the holes 22, or omitting the formation of the holes 22, along a single line. Located between the input waveguide 23 and the output waveguide 24 are two point-like defects 25 and 26 identically shaped. These point-like defects 25 and 26 will be detailed later. The distances between the input waveguide 23 and the point-like defect 25 and between the point-like defect 26 and the output waveguide 24 each correspond to five lines of the holes 22: $(5/2) \times 3^{0.5}a$. The distance between the two point-like defects 25 and 26 is $4 \times 3^{0.5}a$. The following calculation assumes that a is 420 nm and the diameter of the hole 22 is 240 nm. In this two-dimensional photonic crystal multiplexer/demultiplexer, the two point-like defects and the two waveguides are symmetrically arranged with respect to a point.

20 **[0035]** As shown in Fig. 6, the point-like defects 25 and 26 are each formed by omitting three holes 22 lying on a straight line. Being entirely constituted by the same material as that of the body 21, these point-like defects can easily confine light because there is a difference in refractive index between the body 21 and the surrounding air. Therefore, these point-like defects prevent light from leaking from the surface of the body 21 to the outside, thus yielding a high level of Q-value. In addition, as shown in Fig. 6B, two holes 221 and 222 closest to the point-like defects are each shifted to a position $0.15a$ farther from the point-like defect than the position shown in Fig. 6A where each hole is located at a triangular lattice point. According to calculation of the present inventors, shifting the holes 221 and 222 as described above will enhance Q_v (the Q-value between the point-like defect and the outside of the crystal) up to $Q_v \sim 46600$, much higher than the value obtained without shifting the holes: $Q_v \sim 5200$.

25 **[0036]** In addition to $Q_v \sim 46600$, the parameters relating to the two-dimensional photonic crystal multiplexer/demultiplexer of the present embodiment can be calculated using the finite difference time domain method (FDTD method) as follows: Q_{in} , the Q-value between the input waveguide 23 and the point-like defect 25 as well as between the point-like defect 26 and the output waveguide 24, is $Q_{in} \sim 3590$; and μ , the mutual coupling coefficient between the point-like defects 25 and 26, is $\mu \sim 1.42 \times 10^{-4} \omega_0$. From these values, the coupling ratio is derived as 0.90, which falls within the aforementioned preferable range: 0.2 to 10. Also, the resonance wavelength λ_0 of the point-like defects 25 and 26 is 1581.6 nm.

30 **[0037]** From these parameters, the multiplex/demultiplex spectrum of the two-dimensional photonic crystal multiplexer/demultiplexer of the present embodiment has been derived using the mode coupling theory. For comparison, the same calculation has been conducted also for the following two constructions: Comparative Example 1 (Fig. 7A): a two-dimensional photonic crystal multiplexer/demultiplexer having only one point-like defect 31, which construction corresponds to the present embodiment with one of the point-like defects eliminated; and Comparative Example 2 (Fig. 7B): a two-dimensional photonic crystal multiplexer/demultiplexer having only one point-like defect 32 equally spaced from both the input waveguide 23 and the output waveguide 24 by a distance of $(5/2) \times 3^{0.5}a$. The results of the calculations are shown in Fig. 8. The ordinate indicates the multiplex/demultiplex spectrum $I(\lambda)$ in decibels: $I_{dB} = 10 \times \log[I(\lambda)/I(\lambda_0)]$. The multiplex/demultiplex spectrum 40 of the present embodiment has the following features:

35 (i) Within the range in the proximity of λ_0 , the multiplex/demultiplex spectrum of the present embodiment takes larger values than the comparative examples, showing a flattop shape. For example, the wavelength range where I_{dB} is equal to or larger than -1 dB (i.e. $I(\lambda) \sim 0.79I(\lambda_0)$) is 0.25 nm for the multiplex/demultiplex spectrum 41 of Comparative Example 1, 0.45 nm for the multiplex/demultiplex spectrum 42 of Comparative Example 2, and 0.43 nm for the present embodiment, which is larger than the value of Comparative Example 1. Therefore, even if the resonance wavelength λ_0 is displaced from the original value due to an error of a light generator or some other factor, the loss is smaller in the present embodiment than in Comparative Example 1.

(ii) At any wavelength about 0.4 nm or more away from the resonance wavelength λ_0 , the multiplex/demultiplex spectrum takes a smaller value in the present embodiment than in any other comparative examples, showing a shorter tail. The wavelength range where I_{dB} equals to -20dB (i.e. $I(\lambda) \sim 0.01I(\lambda_0)$) is 2.01 nm wide in the present embodiment; this width is smaller than 4.8 nm of Comparative Example 1 or 9.2 nm of Comparative Example 2. Thus, compared to the other examples, the construction of the present embodiment can reduce the noise caused by signals within the wavelength range far from the resonance wavelength λ_0 and suppress the crosstalk with signals from other channels.

[0038] The above-described calculation method using the mode coupling theory is advantageous in that the multiplex/demultiplex spectrum can be derived using function formulae. However, the method is easily affected by an error in Q-value or mutual coupling coefficient μ . Therefore, additional calculations have been conducted using the FDTD method, which numerically determines the multiplex/demultiplex spectrum without computing the Q-value or μ . The result is as shown in Fig. 9 by filled circles. Though the multiplex/demultiplex spectrum obtained is narrower than that calculated using the mode coupling theory, it also shows a flattop shape at around the resonance wavelength λ_0 and a short tail stretched over the wavelength range far from the resonance wavelength λ_0 , as in the result of the calculation using the mode coupling theory.

[0039] In addition, the multiplex/demultiplex spectrum has been calculated using the FDTD method for the case where the point-like defect 26 is shifted in the direction perpendicular to the waveguide by $(7/2) \times 3^{0.5}a$ and in the longitudinal direction of the waveguide by $1.5a$ with respect to the point-like defect 25. The result is as shown in Fig. 9 by triangles. The two sets of data shown in Fig. 9 suggests that the construction of Fig. 10 having larger values at around the resonance wavelength is preferable if the discrepancy of the resonance wavelength λ_0 is regarded as more important, whereas the construction of Fig. 5 is recommendable if the suppression of the noise or crosstalk is more important.

[0040] In the embodiment above, the optical output section of the demultiplexer is constructed as the output waveguide 24. It is also possible to construct it as a point-like defect. This point-like defect also functions as the input section of a multiplexer. In the example shown in Fig. 11, the output section of the demultiplexer (or the input section of the multiplexer) consists of a point-like defect 51 formed by omitting three holes 22 lying on a line, similar to the point-like defects 25 and 26. The holes closest to the point-like defect 51 are arranged at positions closer to the corresponding triangular lattice points than in the case of the point-like defects 25 and 26. This arrangement makes the Q-value of the point-like defect 51 smaller than that of the point-like defect 25 or 26. The light extracted from the input waveguide 23 is transmitted through the point-like defects 25 and 26 and emitted from the body surface of the point-like defect 51 having the reduced Q-value to the outside of the crystal.

[0041] The two-dimensional photonic crystal multiplexer/demultiplexer according to the present invention can take various forms: the point-like defect may be differently shaped, such as a hole having a different diameter; and the holes may be arranged in a different cyclic pattern, such as a square lattice pattern.

[0042] Fig. 12 shows an embodiment of the two-dimensional photonic crystal multiplexer/demultiplexer provided with reflecting sections at the first and second optical input/output sections, respectively, and having a heterostructure. The body 61 consists of two forbidden band zones 63 and 64. The input waveguide 65 and the output waveguide 66, which are identically shaped, pass through the two forbidden band zones 63 and 64. The cycle of the holes 62 is a_1 for the forbidden band zone 63 and a_2 for the forbidden band zone 64, where $a_1 > a_2$. Two point-like defects 67 and 68 having the same shape are located between the input waveguide 65 and the output waveguide 66.

[0043] In this construction, the transmission wavelength band of the waveguide in the two forbidden band zones is as shown in Fig. 13. The input waveguide 65 and the output waveguide 66 have the same transmission wavelength band because they are identically shaped. The difference in cycle between the forbidden band zones 63 and 64 produces a wavelength band 75 that is included within the transmission wavelength band 73 of the waveguide in the forbidden band zone 63 but not within the transmission wavelength band 74 of the waveguide in the forbidden band zone 64. The two cycles can be appropriately determined so that the resonance wavelength of the point-like defects 67 and 68 falls within the wavelength band 75. In this construction, the light having the resonance wavelength and propagating through the input waveguide 65 is reflected at the boundary between the forbidden band zones 63 and 64. A ray of light having the resonance wavelength that has passed by the point-like defects 67 and 68 without being introduced into them is reflected back and introduced into the point-like defects 67 and 68. Thus, the demultiplexing efficiency is enhanced. Similarly, if a demultiplexed ray of light is introduced through the point-like defects 67 and 68 into the output waveguide 66, the light is reflected at the boundary between the forbidden band zones 63 and 64 and extracted from only one end of the output waveguide 66. This also contributes to the enhancement of the demultiplexing efficiency.

Claims

1. A two-dimensional photonic crystal multiplexer/demultiplexer, comprising:

- a) a slab-shaped body (21);
- b) a plurality of areas (22) arranged in a lattice pattern with a predetermined cycle within the body (21), where a refractive index of the aforementioned areas (22) differs from that of the body (21);
- c) a first optical input/output section consisting of a waveguide (11, 23) formed in the body (21), where the waveguide is made of a linear defect of the modified refractive index areas;
- d) a second optical input/output section (12, 24, 51) formed in the body (21); and
- e) two point-like defect resonators (13, 14) composed of point-like defects (25, 26) having substantially the same resonance wavelength and arranged in series between the first and second optical input/output sections, each point-like defect (25, 26) consisting of a point-like region devoid of the modified refractive index areas (22);

characterized in that a value of a coupling ratio defined as $\mu^2/[(\omega_0/2) \times (1/Q_{in} + 1/Q_v)]^2$ is 0.2-10, where ω_0 is a resonance frequency of the point-like defect resonators, Q_{in} is a Q-value between one of the first and second optical input/output section and the point-like defect resonator closest to the section, which has a relationship $Q_{in} = \tau_e \omega_0 / 2$ with an attenuation constant τ_e , indicating the ratio of the attenuation constant to the period $T = 2\pi/\omega_0$ of the resonating light and being inversely proportional to the ratio of energy leaking from the resonator to said one of the sections, Q_v is a Q-value between each of the point-like defect resonators and an outside of the crystal, which has a relationship $Q = \tau_0 \omega_0 / 2$ with an attenuation constant τ_0 , indicating the ratio of the attenuation constant to the period $T = 2\pi/\omega_0$ of the resonating light and being inversely proportional to the ratio of energy leaking from the resonator to the outside of the crystal, and μ is a mutual coupling coefficient between two point-like defect resonators, said mutual coupling coefficient μ being derived from $da_L/dt = (j\omega_0 - 1/\tau_0)a_L - j\mu a_R$ and $da_R/dt = (j\omega_0 - 1/\tau_0)a_R - j\mu a_L$ for attenuation constant τ_0 and a_L and a_R being the amplitudes of light resonating at the two point-like defect resonators observed under the condition that no waveguide is present.

2. The two-dimensional photonic crystal multiplexer/demultiplexer according to claim 1, which is **characterized in that** the second optical input/output section (12, 51) is a point-like defect whose Q-value with respect to an outside of the crystal is smaller than that of the point-like defect resonators.
3. The two-dimensional photonic crystal multiplexer/demultiplexer according to claim 2, which is **characterized in that** at least one of the point-like resonators is a donor type defect formed by eliminating one or more of the modified refractive index areas (22).
4. The two-dimensional photonic crystal multiplexer/demultiplexer according to claim 1, which is **characterized in that** the second optical input/output section (12, 24) is a waveguide consisting of a linear defect of the modified refractive index areas (22).
5. The two-dimensional photonic crystal multiplexer/demultiplexer according to claim 4, which is **characterized in that** the second optical input/output section (12, 24) is provided with a second reflecting section for reflecting light whose wavelength equals to the aforementioned resonance wavelength.
6. The two-dimensional photonic crystal multiplexer/demultiplexer according to one of claim 1 to 5 which is **characterized in that** the first optical input/output section (11, 23) is provided with a First reflecting section for reflecting light whose wavelength equals to the aforementioned resonance wavelength.
7. The two-dimensional photonic crystal multiplexer/demultiplexer according to claim 5 or 6, which is **characterized in that:**

the body (21) is composed of plural forbidden band zones (63, 64), with modified refractive index areas being formed within each forbidden band zones (63, 64) with a different arrangement cycle;
 the first optical input/output section (11, 23) or the second optical input/output section (12, 24) is formed so that it passes through all the forbidden band zones; and
 the resonance wavelength of the point-like defect resonators (13, 14) falls within a transmission wavelength band of the waveguide of the first or second optical input/output section in a forbidden band zone including the point-like defect resonators, whereas it is out of the transmission wavelength band of the waveguide in any other forbidden band zone.

8. The two-dimensional photonic crystal multiplexer/demultiplexer according to one of claims 1 to 7, which is **characterized in that:**

the two point-like defect resonators and the two optical input/output sections are symmetrically arranged with respect to a point.

9. The two-dimensional photonic crystal multiplexer/demultiplexer according to one of claims 1 to 8, which is **characterized in that** one or more of the modified refractive index areas located in a proximity of the point-like defect resonators are shifted from positions determined by the aforementioned arrangement cycle.

Patentansprüche

1. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall, umfassend:

- a) einen plattenförmigen Körper (21);
- b) eine Mehrzahl von Bereichen (22), welche in einem Gittermuster mit einem vorab bestimmten Zyklus innerhalb des Körpers (21) angeordnet sind, wobei ein Brechungsindex der vorgenannten Bereiche (22) von demjenigen des Körpers (21) verschieden ist;
- c) einen ersten optischen Eingangs-/Ausgangsabschnitt, bestehend aus einem Wellenleiter (11, 23), welcher in dem Körper (21) gebildet ist, wobei der Wellenleiter von einem linearen Defekt der modifizierten Brechungsindexbereiche gebildet ist;
- d) einen zweiten optischen Eingangs-/Ausgangsabschnitt (12, 24, 51), welcher in dem Körper (21) gebildet ist; und
- e) zwei punktförmige Defekt-Resonatoren (13, 14), gebildet von punktförmigen Defekten (25, 26), welche im Wesentlichen die gleiche Resonanzwellenlänge aufweisen und in Reihe zwischen dem ersten und dem zweiten optischen Eingangs-/Ausgangsabschnitt angeordnet sind, wobei jeder punktförmige Defekt (25, 26) aus einer punktförmigen Region besteht, die frei von den modifizierten Brechungsindexbereichen (22) ist;

dadurch gekennzeichnet, dass ein Wert eines als $\mu^2/[(\omega_0/2) \times (1/Q_{in} + 1/Q_v)]^2$ definierten Kopplungsverhältnisses 0,2-10 beträgt, worin ω_0 eine Resonanzfrequenz der punktförmigen Defekt-Resonatoren ist, worin Q_{in} ein Q-Wert zwischen einem der Abschnitte erster und zweiter optischer Eingangs-/Ausgangsabschnitt und dem punktförmigen Defekt-Resonator, der dem Abschnitt am nächsten liegt, ist, mit einer Beziehung $Q_{in} = \tau_e \omega_0 / 2$ mit einer Dämpfungskonstante τ_e , welche das Verhältnis der Dämpfungskonstante zu der Periode $T = 2\pi / \omega_0$ des resonanten Lichts angibt und umgekehrt proportional zum Verhältnis der Energie, die aus dem Resonator zu dem einen der Abschnitte leckt, ist, worin Q_v ein Q-Wert zwischen jedem der punktförmigen Defekt-Resonatoren und einer Außenseite des Kristalls ist, mit einer Beziehung $Q = \tau_0 \omega_0 / 2$ mit einer Dämpfungskonstante τ_0 , welche das Verhältnis der Dämpfungskonstante zu der Periode $T = 2\pi / \omega_0$ des resonanten Lichts angibt und umgekehrt proportional zum Verhältnis der Energie, die aus dem Resonator zu der Außenseite des Kristalls leckt, ist, und worin μ ein gegenseitiger Kopplungskoeffizient zwischen zwei punktförmigen Defekt-Resonatoren ist, wobei der gegenseitige Kopplungskoeffizient μ abgeleitet ist von $da_L/dt = (j\omega_0 - 1/\tau_0)a_L - j\mu a_R$ und $da_R/dt = (j\omega_0 - 1/\tau_0)a_R - j\mu a_L$ für die Dämpfungskonstante τ_0 und wobei a_L und a_R die Amplituden von Licht sind, welches bei den zwei punktförmigen Defekt-Resonatoren resonant ist, bei Beobachtung unter der Bedingung, dass kein Wellenleiter vorhanden ist.

2. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach Anspruch 1, **dadurch gekennzeichnet, dass** der zweite optische Eingangs-/Ausgangsabschnitt (12, 51) ein punktförmiger Defekt ist, dessen Q-Wert mit Bezug auf eine Außenseite des Kristalls kleiner ist als derjenige der punktförmigen Defekt-Resonatoren.
3. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach Anspruch 2, **dadurch gekennzeichnet, dass** mindestens einer der punktförmigen Resonatoren ein Defekt vom Donor-Typ ist, welcher durch Eliminieren einer oder mehrerer der modifizierten Brechungsindexbereiche (22) gebildet ist.
4. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach Anspruch 1, **dadurch gekennzeichnet, dass** der zweite optische Eingangs-/Ausgangsabschnitt (12, 24) ein Wellenleiter ist, bestehend aus einem linearen Defekt der modifizierten Brechungsindexbereiche (22).
5. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach Anspruch 4, **dadurch gekennzeichnet, dass** der zweite optische Eingangs-/Ausgangsabschnitt (12, 24) mit einem zweiten Reflexionsabschnitt versehen ist zum Reflektieren von Licht, dessen Wellenlänge gleich der vorgenannten Resonanzwellenlänge ist.
6. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach einem der Ansprüche 1 bis 5,

dadurch gekennzeichnet, dass der erste optische Eingangs-/Ausgangsabschnitt (11, 23) mit einem ersten Reflexionsabschnitt versehen ist zum Reflektieren von Licht, dessen Wellenlänge gleich der vorgenannten Resonanzwellenlänge ist.

- 5 7. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach Anspruch 5 oder 6, **dadurch gekennzeichnet, dass:**

10 der Körper (21) von einer Mehrzahl von verbotenen Bandzonen (63, 64) gebildet ist, wobei modifizierte Brechungsindexbereiche innerhalb jeder verbotenen Bandzone (63, 64) mit einem unterschiedlichen Anordnungszyklus gebildet sind;

15 der erste optische Eingangs-/Ausgangsabschnitt (11, 23) oder der zweite optische Eingangs-/Ausgangsabschnitt (12, 24) so gebildet ist, dass er sich durch alle verbotenen Bandzonen hindurch erstreckt; und dass die Resonanzwellenlänge der punktierten Defekt-Resonatoren (13, 14) innerhalb eines Transmissionswellenlängenbandes des Wellenleiters des ersten oder des zweiten optischen Eingangs-/Ausgangsabschnitts in einer verbotenen Bandzone, welche die punktierten Defekt-Resonatoren umfasst, liegt, während sie in jeder anderen verbotenen Bandzone außerhalb des Transmissionswellenlängenbandes des Wellenleiters liegt.

- 20 8. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass:**

die zwei punktierten Defekt-Resonatoren und die zwei optischen Eingangs-/Ausgangsabschnitte bezüglich eines Punktes symmetrisch angeordnet sind.

- 25 9. Multiplexer/Demultiplexer mit einem zweidimensionalen photonischen Kristall nach einem der Ansprüche 1 bis 8, **dadurch gekennzeichnet, dass** einer oder mehrere der modifizierten Brechungsindexbereiche, welche sich in einer Nachbarschaft zu den punktierten Defekt-Resonatoren befinden, von Positionen, welche durch den vorgenannten Anordnungszyklus bestimmt sind, verschoben sind.

30 **Revendications**

1. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel, comprenant :

- 35 a) un corps en forme de plaque (21) ;
 b) une pluralité de zones (22) agencées dans un motif en treillis avec un cycle prédéterminé à l'intérieur du corps (21), où un indice de réfraction des zones susmentionnées (22) diffère de celui du corps (21) ;
 c) une première section d'entrée/sortie optique se composant d'un guide d'onde (11, 23) formé dans le corps (21), où le guide d'onde est constitué d'un défaut linéaire des zones d'indice de réfraction modifié ;
 40 d) une deuxième section d'entrée/sortie optique (12, 24, 51) formée dans le corps (21) ; et
 e) deux résonateurs de défauts ponctuels (13, 14) composés de défauts ponctuels (25, 26) ayant sensiblement la même longueur d'onde de résonance et agencés en série entre les première et deuxième sections d'entrée/sortie optique, chaque défaut ponctuel (25, 26) se composant d'une région ponctuelle dépourvue des zones d'indice de réfraction modifié (22) ;

45 **caractérisé en ce qu'**une valeur d'un rapport de couplage défini en tant que $\mu^2/[(\omega_0/2) \times (1/Q_{in} + 1/Q_v)]^2$ est 0,2-10, où ω_0 est une fréquence de résonance des résonateurs de défauts ponctuels, Q_{in} est une valeur Q entre l'une des première et deuxième sections d'entrée/sortie optique et le résonateur de défaut ponctuel le plus proche de la section, qui a une relation $Q_{in} = T_e \omega_0 / 2$ avec une constante d'atténuation T_e , indiquant le rapport de la constante d'atténuation sur la période $T = 2\pi/\omega_0$ de la lumière résonnante et étant inversement proportionnelle au rapport de la fuite d'énergie du résonateur vers ladite une des sections, Q_v est une valeur Q entre chacun des résonateurs de défauts ponctuels et un extérieur du cristal, qui a une relation $Q = T_0 \omega_0 / 2$ avec une constante d'atténuation T_0 , indiquant le rapport de la constante d'atténuation sur la période $T = 2\pi/\omega_0$ de la lumière résonnante et étant inversement proportionnelle au rapport de la fuite d'énergie du résonateur vers l'extérieur du cristal, et μ est un coefficient de couplage mutuel entre deux résonateurs de défauts ponctuels, ledit coefficient de couplage mutuel μ étant dérivé
 55 de $da_L/dt = (j\omega_0 - 1/T_0)a_L - j\mu a_R$ et de $da_R/dt = (j\omega_0 - 1/T_0)a_R - j\mu a_L$ pour la constante d'atténuation T_0 et a_L et a_R étant les amplitudes de la lumière résonnant aux deux résonateurs de défauts ponctuels observées dans la condition dans laquelle aucun guide d'onde n'est présent.

2. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon la revendication 1, qui est **caractérisé en ce que** la deuxième section d'entrée/sortie optique (12, 51) est un défaut ponctuel dont la valeur Q par rapport à un extérieur du cristal est inférieure à celle des résonateurs de défauts ponctuels.

5 3. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon la revendication 2, qui est **caractérisé en ce qu'**au moins l'un des résonateurs de défauts ponctuels est un défaut de type donneur formé en éliminant une ou plusieurs des zones d'indice de réfraction modifié (22).

10 4. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon la revendication 1, qui est **caractérisé en ce que** la deuxième section d'entrée/sortie optique (12, 24) est un guide d'onde se composant d'un défaut linéaire des zones d'indice de réfraction modifié (22).

15 5. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon la revendication 4, qui est **caractérisé en ce que** la deuxième section d'entrée/sortie optique (12, 24) est pourvue d'une deuxième section de réflexion pour refléter la lumière dont la longueur d'onde est égale à la longueur d'onde de résonance susmentionnée.

20 6. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon l'une des revendications 1 à 5, qui est **caractérisé en ce que** la première section d'entrée/sortie optique (11, 23) est pourvue d'une première section de réflexion pour refléter la lumière dont la longueur d'onde est égale à la longueur d'onde de résonance susmentionnée.

25 7. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon la revendication 5 ou 6, qui est **caractérisé en ce que** :

le corps (21) est composé de plusieurs zones de bande interdite (63, 64), avec des zones d'indice de réfraction modifié qui sont formées à l'intérieur de chacune des zones de bande interdite (63, 64) avec un cycle d'agencement différent ;

la première section d'entrée/sortie optique (11, 23) ou la deuxième section d'entrée/sortie optique (12, 24) est formée de manière à traverser toutes les zones de bande interdite ; et

30 la longueur d'onde de résonance des résonateurs de défauts ponctuels (13, 14) se trouve dans une bande de longueurs d'onde de transmission du guide d'onde de la première ou deuxième section d'entrée/sortie optique dans une zone de bande interdite comprenant les résonateurs de défauts ponctuels, tandis qu'elle se trouve à l'extérieur de la bande de longueurs d'onde de transmission du guide d'onde dans n'importe quelle autre zone de bande interdite.

35 8. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon l'une des revendications 1 à 7, qui est **caractérisé en ce que** :

les deux résonateurs de défauts ponctuels et les deux sections d'entrée/sortie optique sont agencés symétriquement par rapport à un point.

40 9. Multiplexeur/démultiplexeur à cristal photonique bidimensionnel selon l'une des revendications 1 à 8, qui est **caractérisé en ce qu'**une ou plusieurs des zones d'indice de réfraction modifié situées à proximité des résonateurs de défauts ponctuels sont décalées à partir de positions déterminées par le cycle d'agencement susmentionné.

45

50

55

Fig. 1

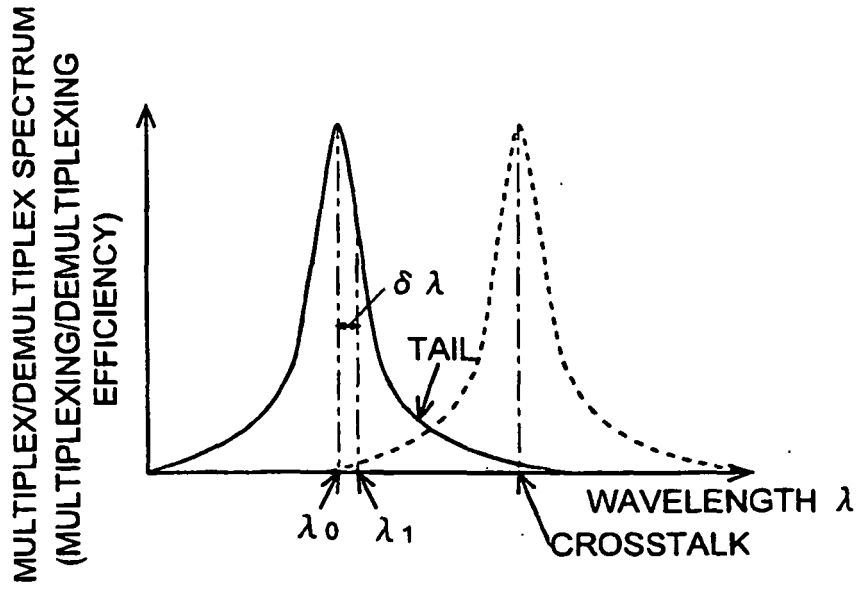


Fig. 2A

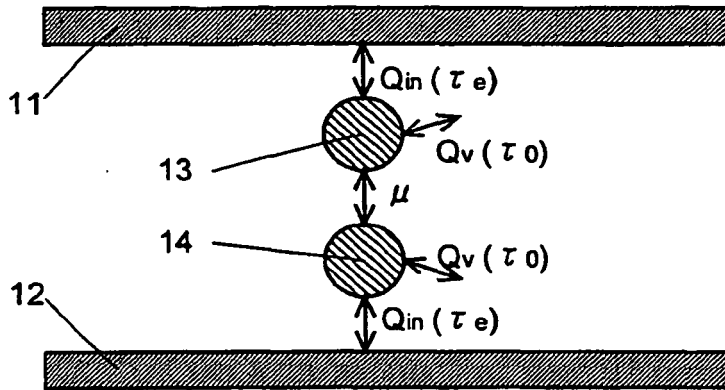


Fig. 2B

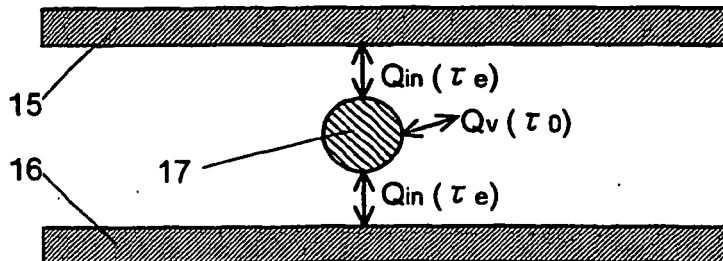


Fig. 3A

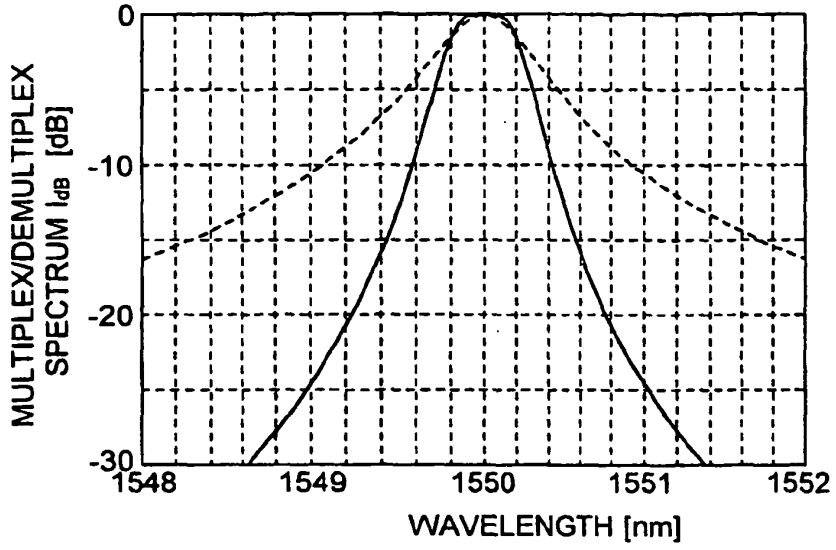


Fig. 3B

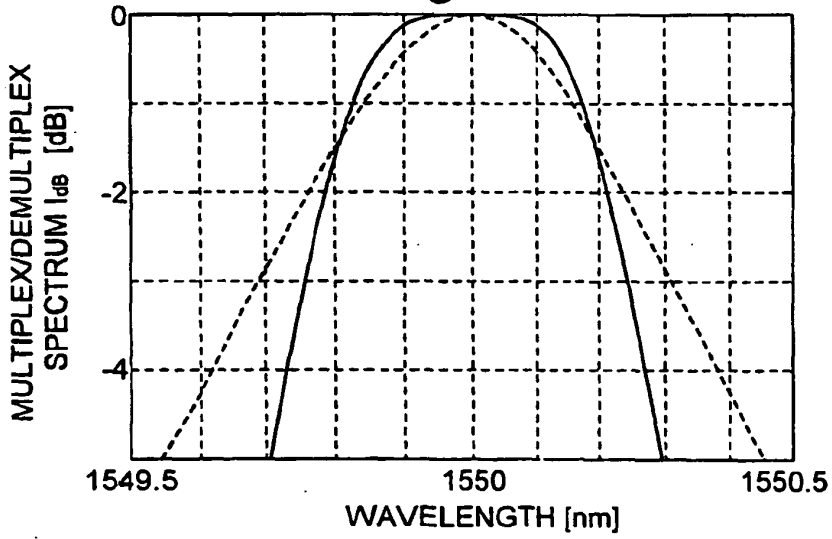


Fig. 4

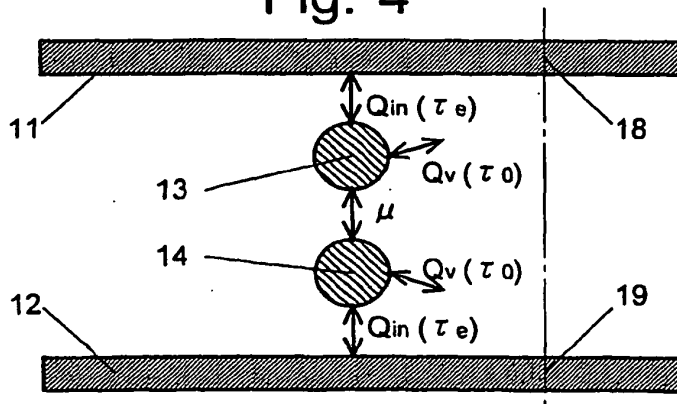


Fig. 5A

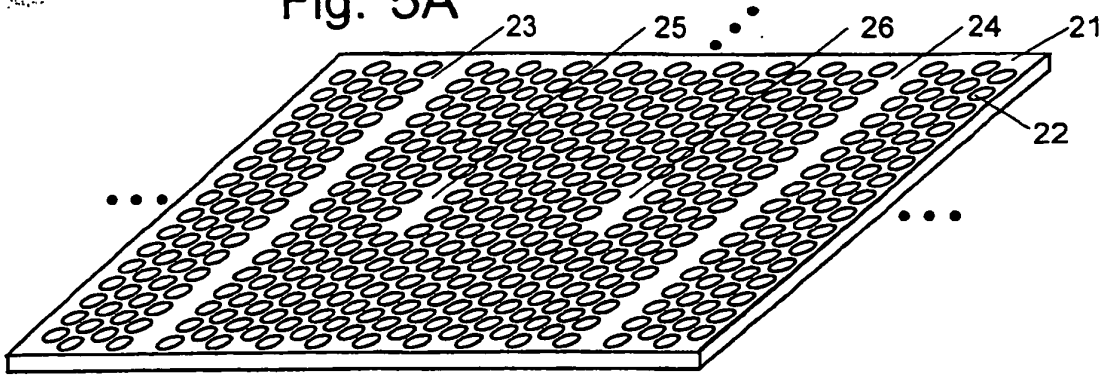


Fig. 5B

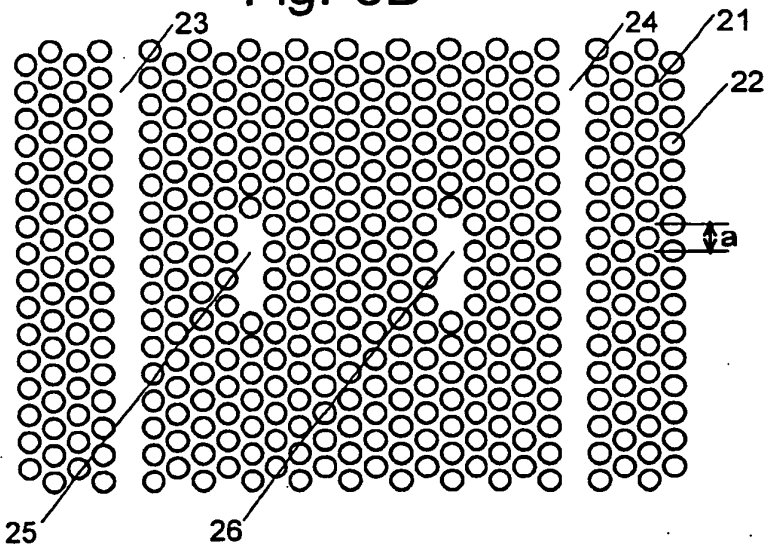


Fig. 6

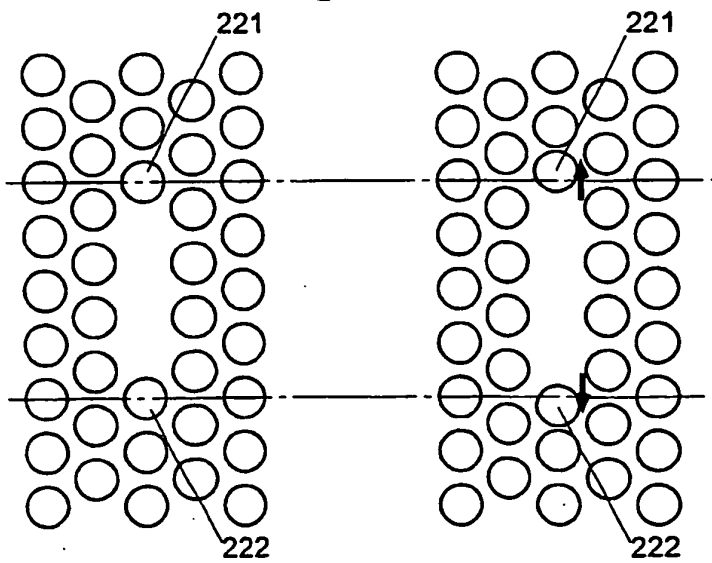


Fig. 7A

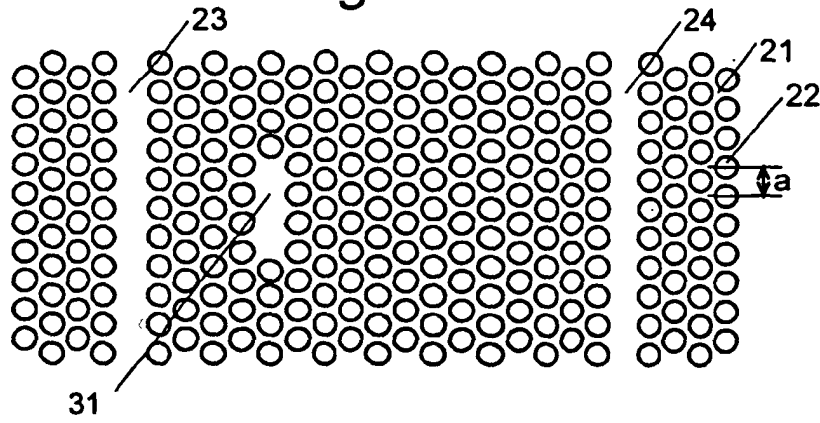


Fig. 7B

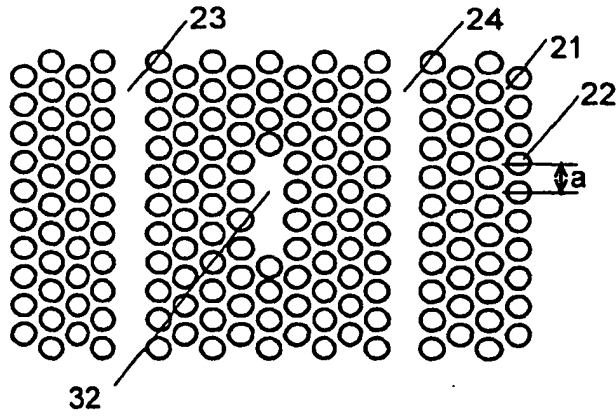


Fig. 8

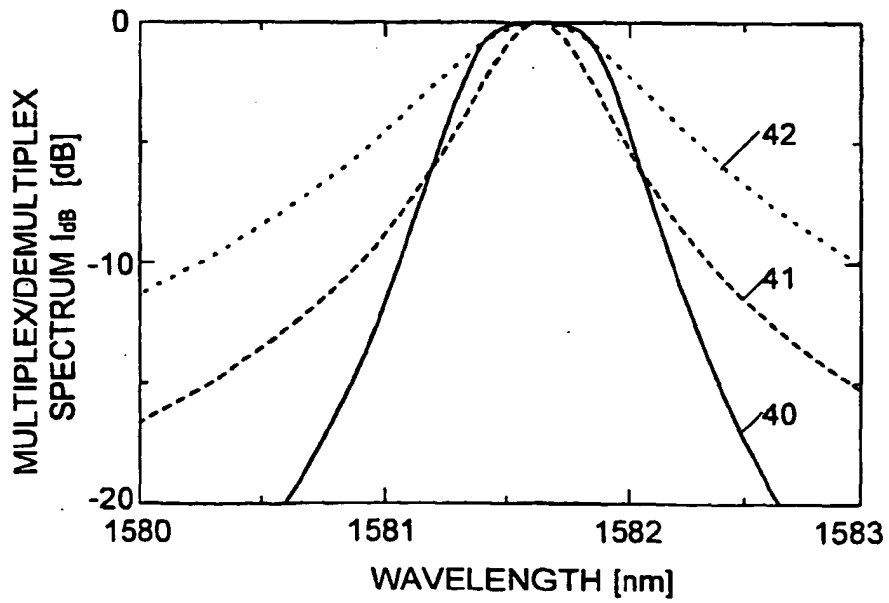


Fig. 9

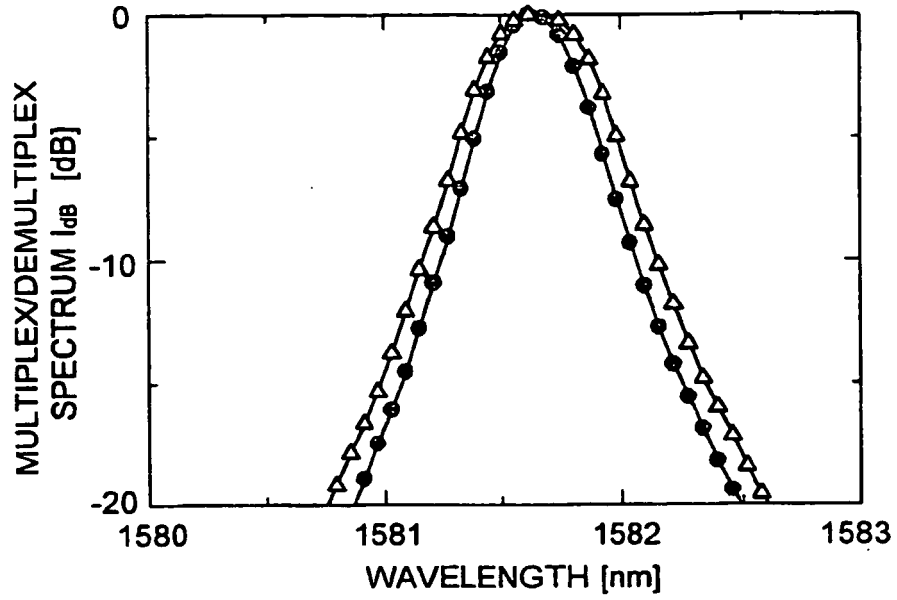


Fig. 10

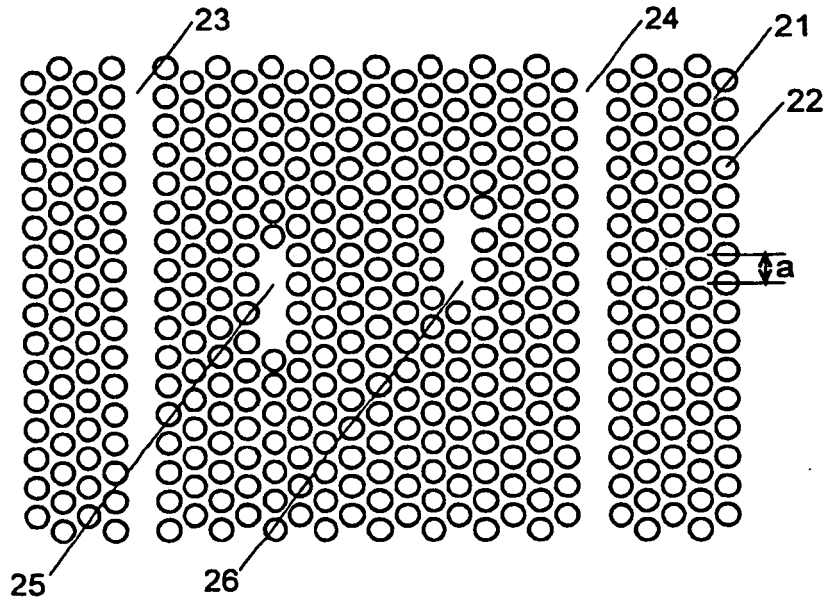


Fig. 11

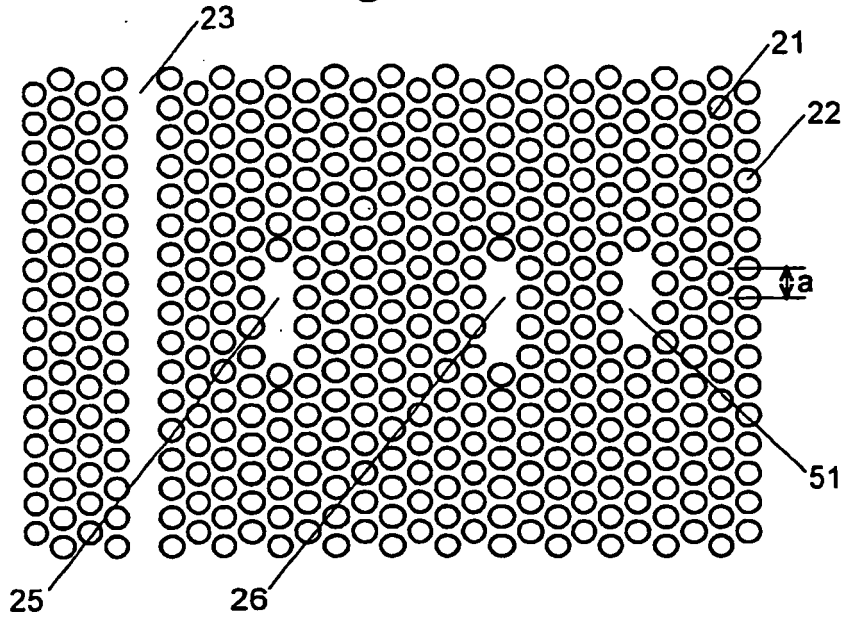


Fig. 12


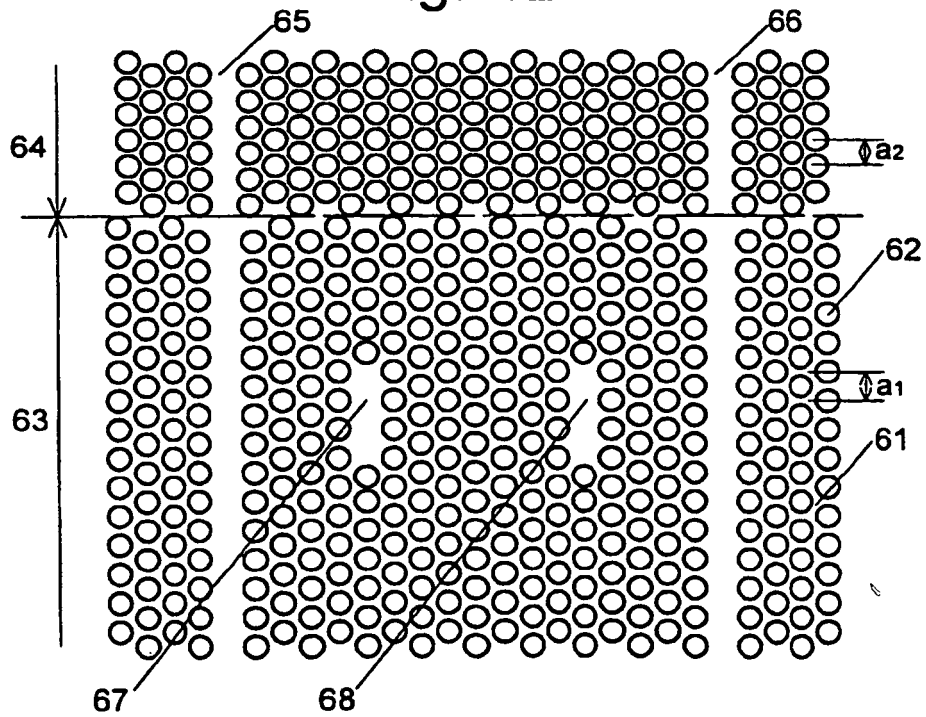


Fig. 13

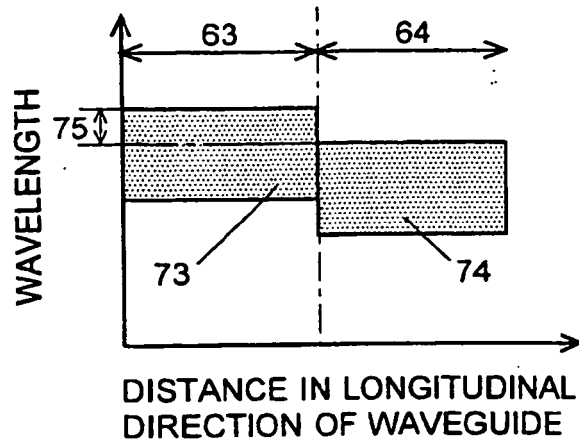

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20030011775 A1 [0005]
- FR 2841658 A1 [0005]
- WO 9857207 A1 [0005]
- JP 2001272555 A [0006]

Non-patent literature cited in the description

- **Chongjun Jin et al.** Reflectionless Multichannel Wavelength Demultiplexer in a Transmission Resonator Configuration. *IEEE JOURNAL OF QUANTUM ELECTRONICS*, January 2003, vol. 39 [0005]
- Channel Drop Tunneling through Localized States. **S. Fan et al.** *Physical Review Letters*. American Physical Society, 1998, vol. 80, 960-963 [0006]