



US006023633A

United States Patent [19]

[11] **Patent Number:** **6,023,633**

Kado

[45] **Date of Patent:** **Feb. 8, 2000**

[54] **MAGNETOMEASURING APPARATUS A HAVING A COOLANT VESSEL WITH AN ACCESS OPENING AND SENSOR SUPPORT FOR LIMITING HEAT TRANSFER**

[56] **References Cited**

U.S. PATENT DOCUMENTS

5,442,289	8/1995	Dilorio et al.	600/409
5,657,756	8/1997	Vrba et al.	600/409
5,713,354	2/1998	Warden	600/409

[75] Inventor: **Hisashi Kado**, Kashiwa, Japan

Primary Examiner—Ruth S. Smith
Attorney, Agent, or Firm—Jordan and Hamburg LLP

[73] Assignee: **Kanazawa Institute of Technology**,
Ishikawa, Japan

[21] Appl. No.: **09/069,688**

[57] **ABSTRACT**

[22] Filed: **Apr. 29, 1998**

A magnetomeasuring apparatus includes a cooling vessel holding a plurality of magnetic field sensors and a coolant. The magnetomeasuring apparatus comprises a sensor support with the plurality of magnetic field sensors removably mounted thereon, and a fixing device for removably fixing the sensor support with the plural magnetic field sensors mounted thereon to a measuring surface of the cooling vessel. An opening of the cooling vessel is larger than the measuring surface. The magnetomeasuring apparatus has a small opening so that the apparatus has a small total amount of heat intruding the vessel.

Related U.S. Application Data

[62] Division of application No. 08/764,818, Dec. 12, 1996, Pat. No. 5,896,645.

[30] **Foreign Application Priority Data**

Dec. 14, 1995 [JP] Japan 7-325570

[51] **Int. Cl.⁷** **A61B 5/05**

[52] **U.S. Cl.** **600/409; 324/244; 324/248**

[58] **Field of Search** **600/409; 324/244, 324/248**

4 Claims, 15 Drawing Sheets

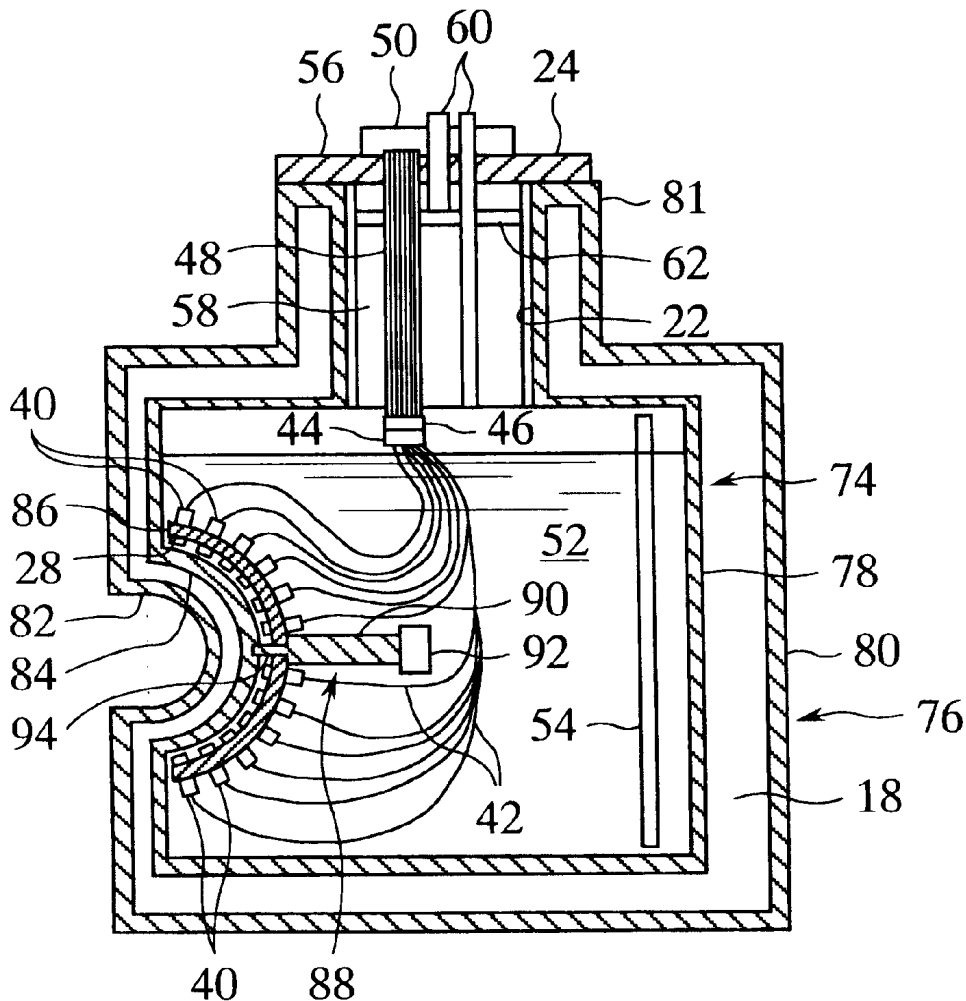


FIG. 1

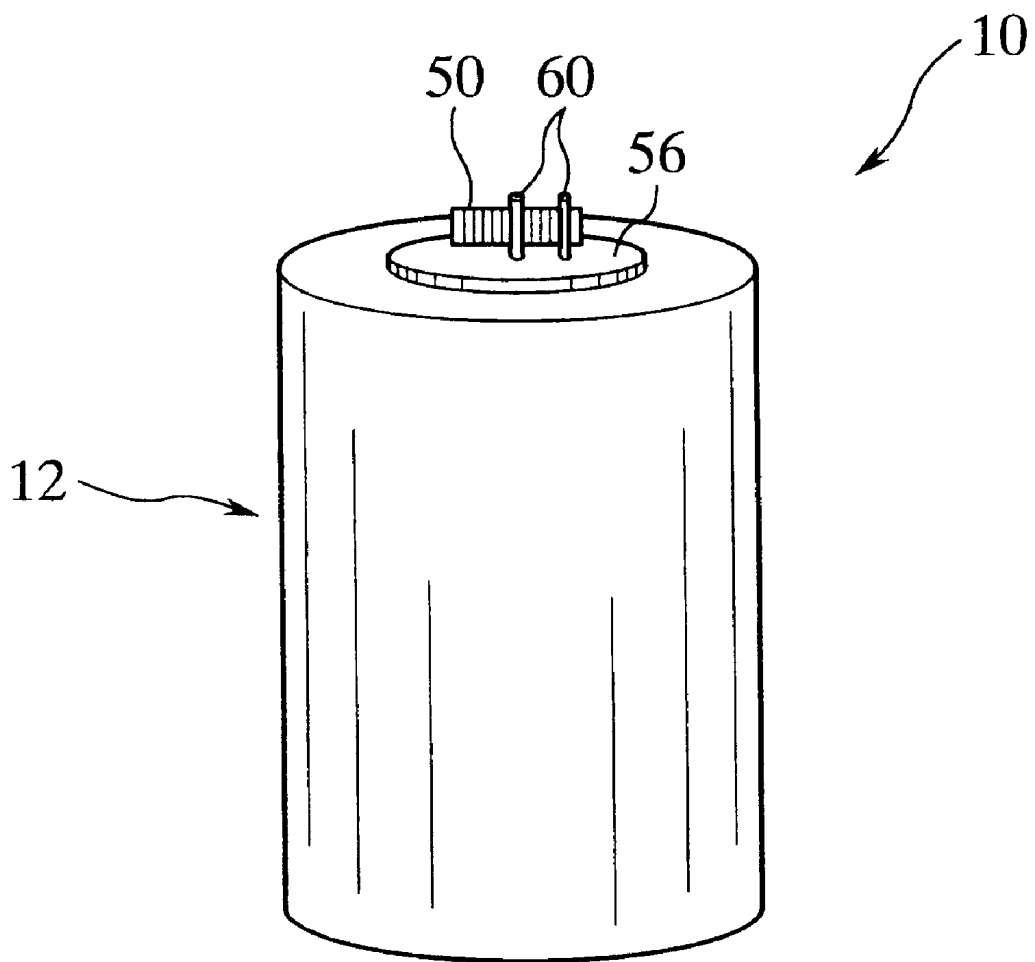


FIG. 2

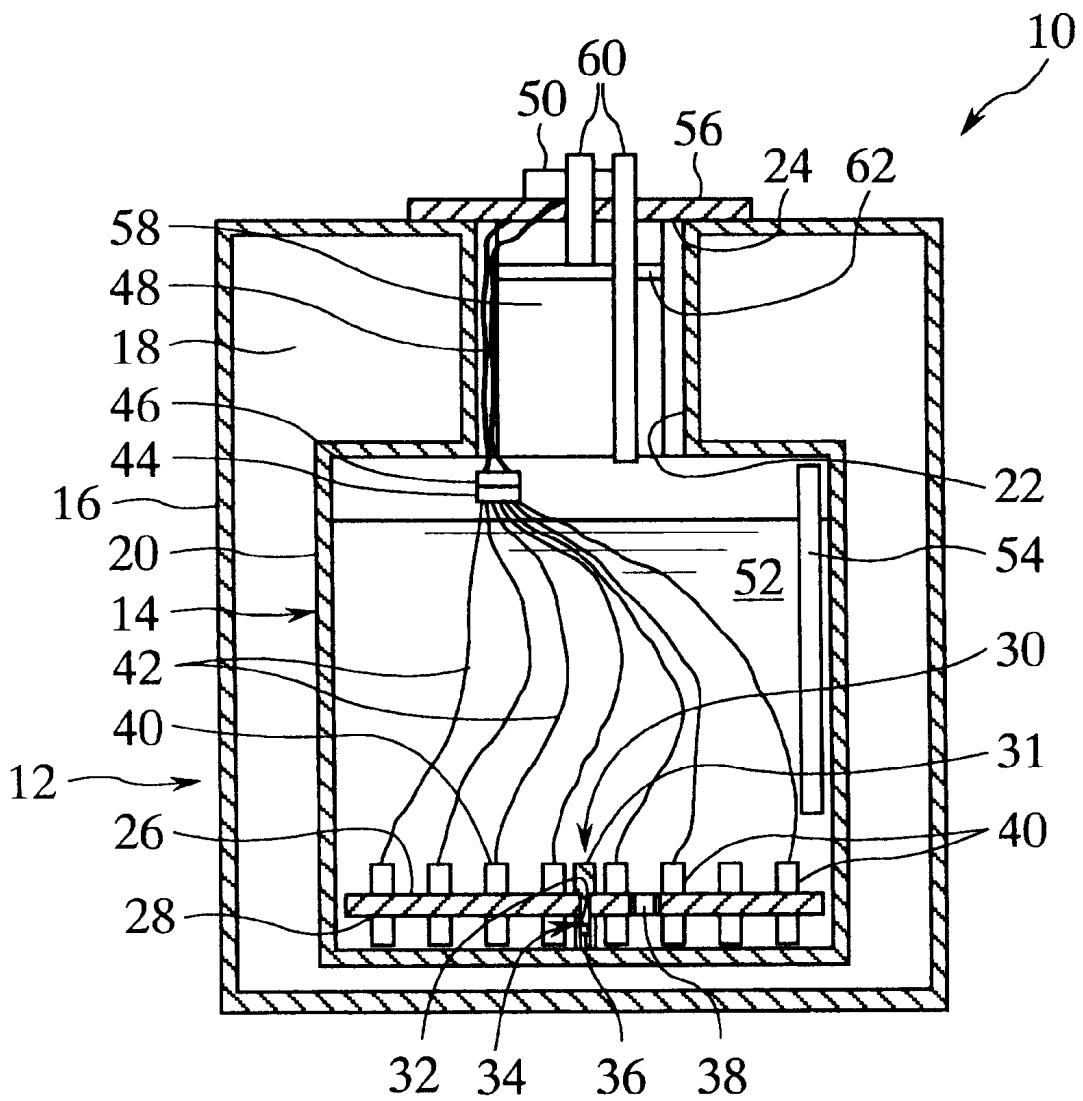


FIG.3

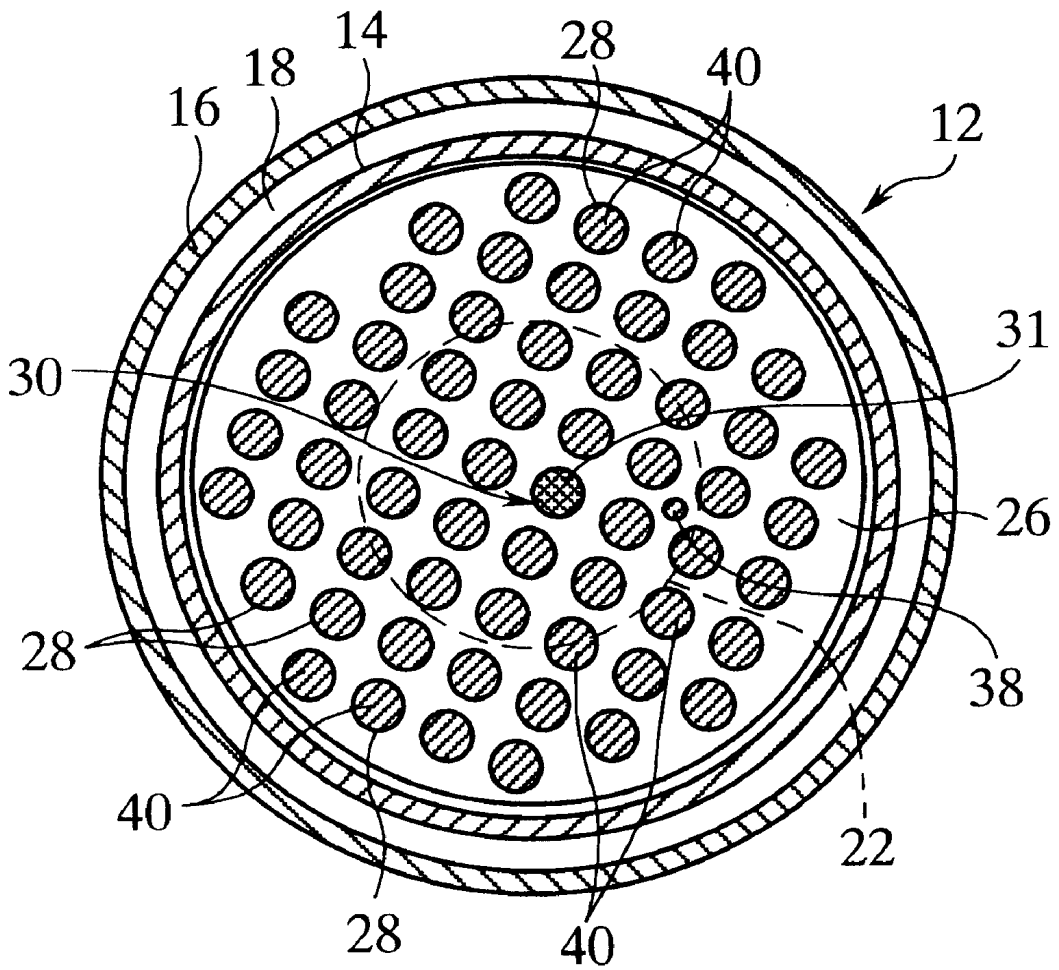


FIG.4A

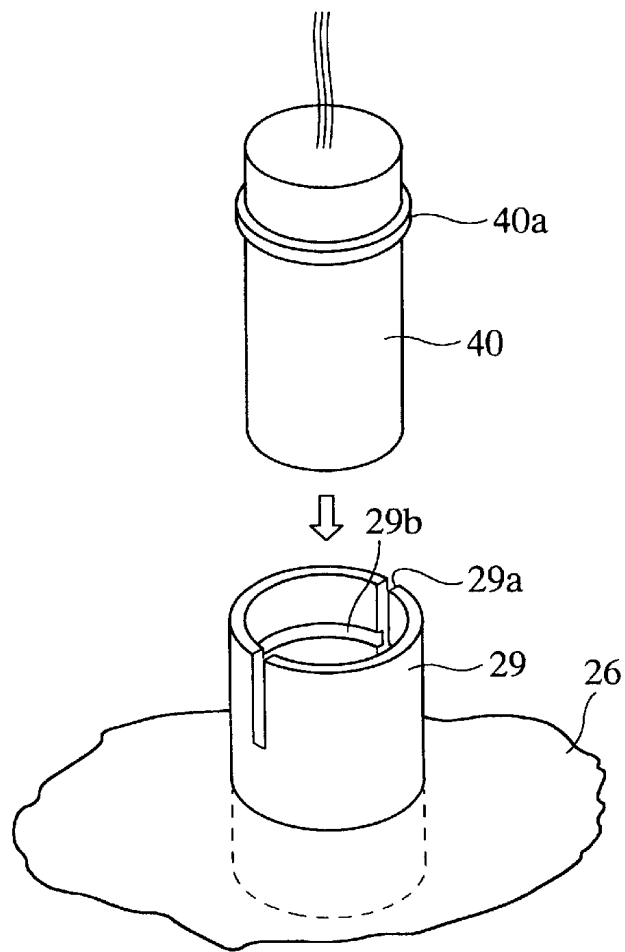


FIG.4B

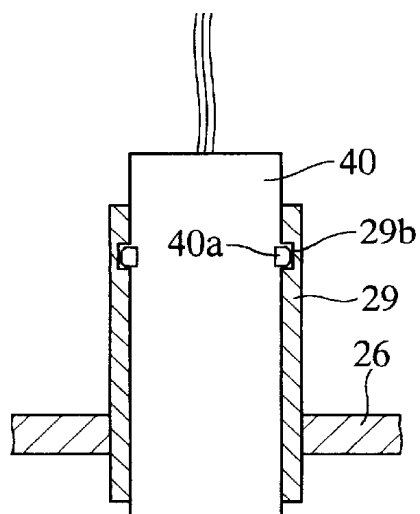


FIG. 5

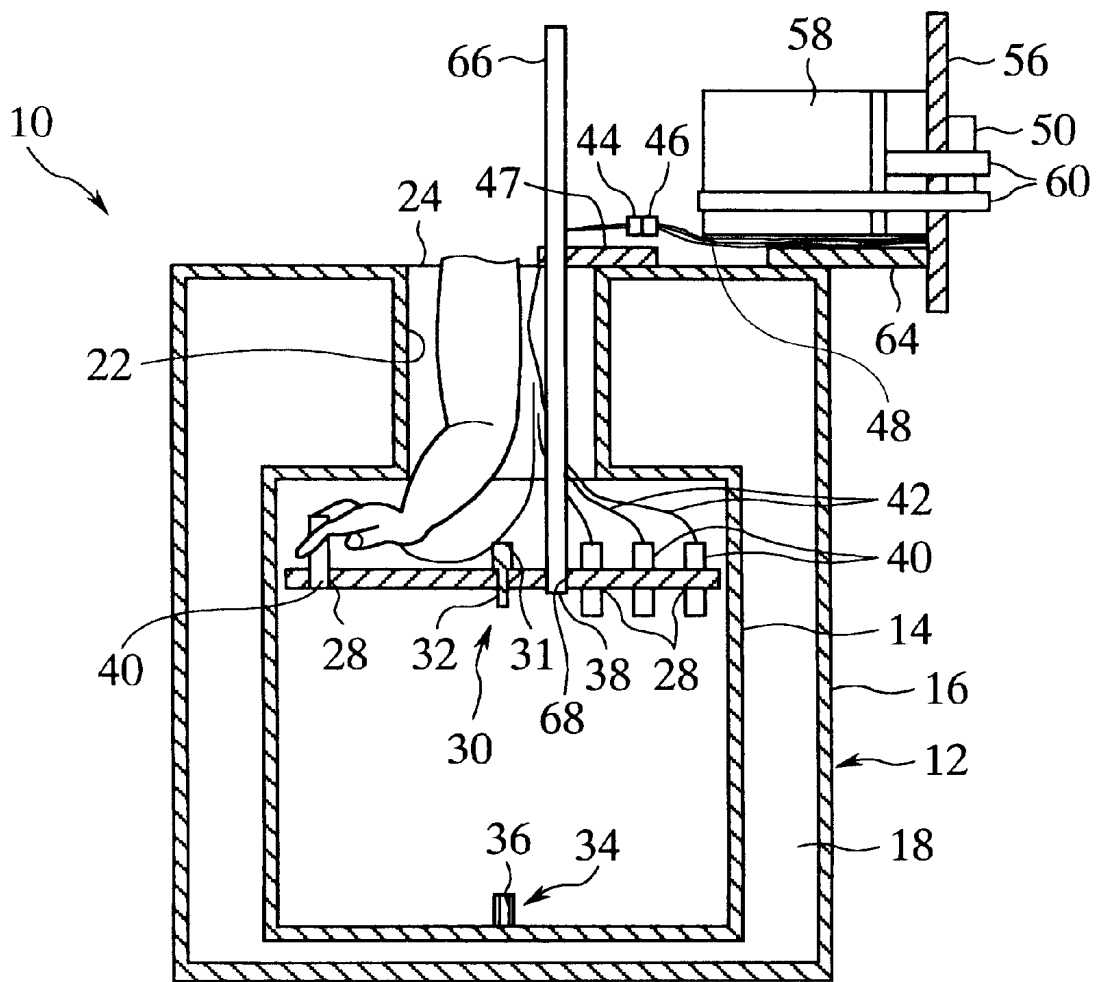


FIG.6A

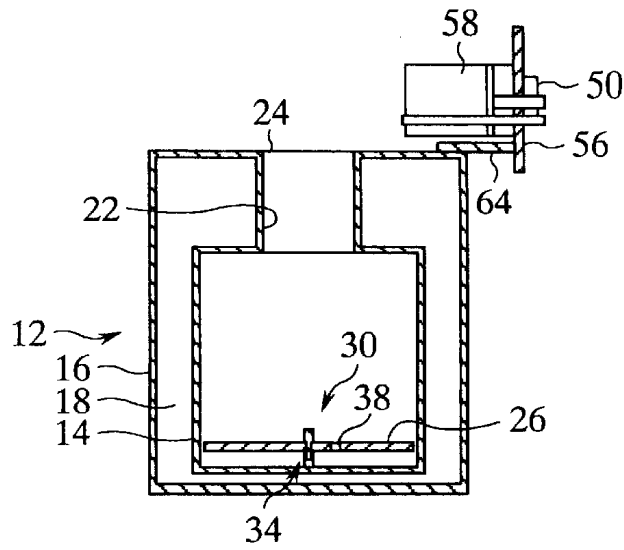


FIG.6B

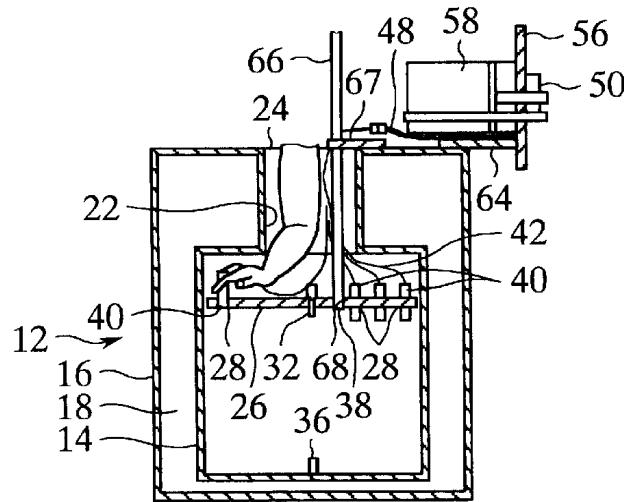


FIG.6C

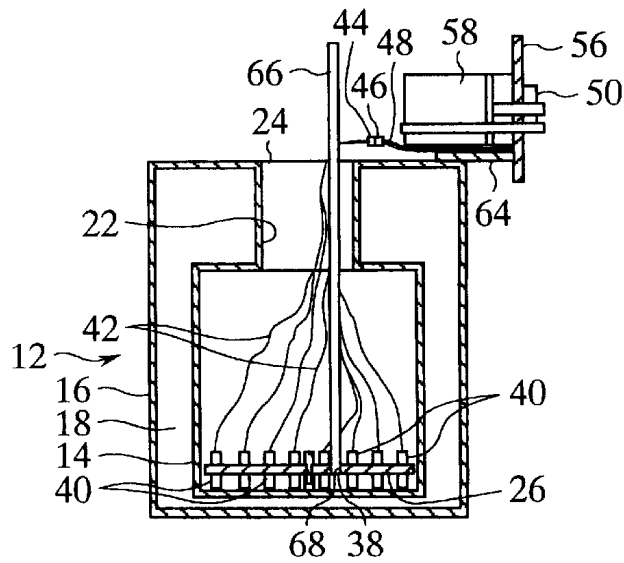


FIG. 7A

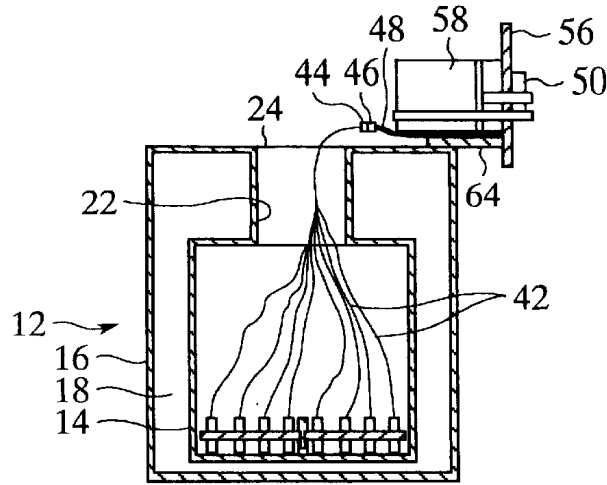


FIG. 7B

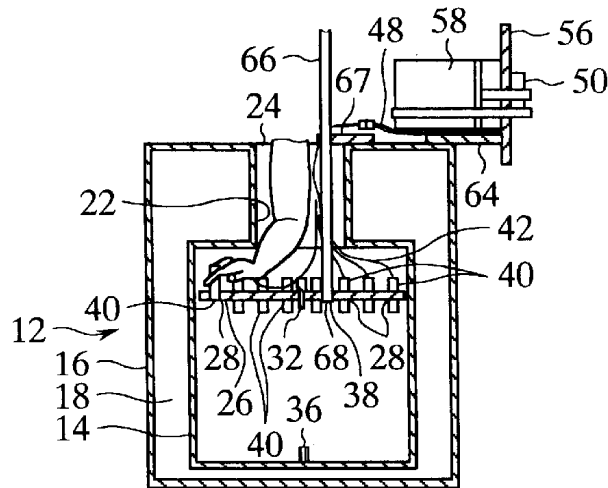


FIG. 7C

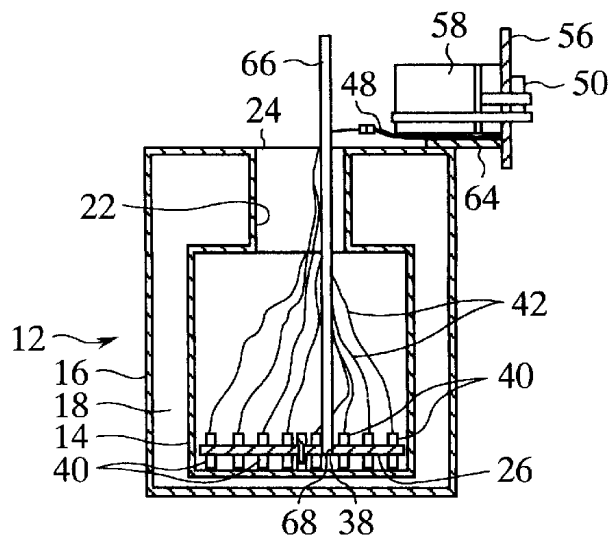


FIG. 8

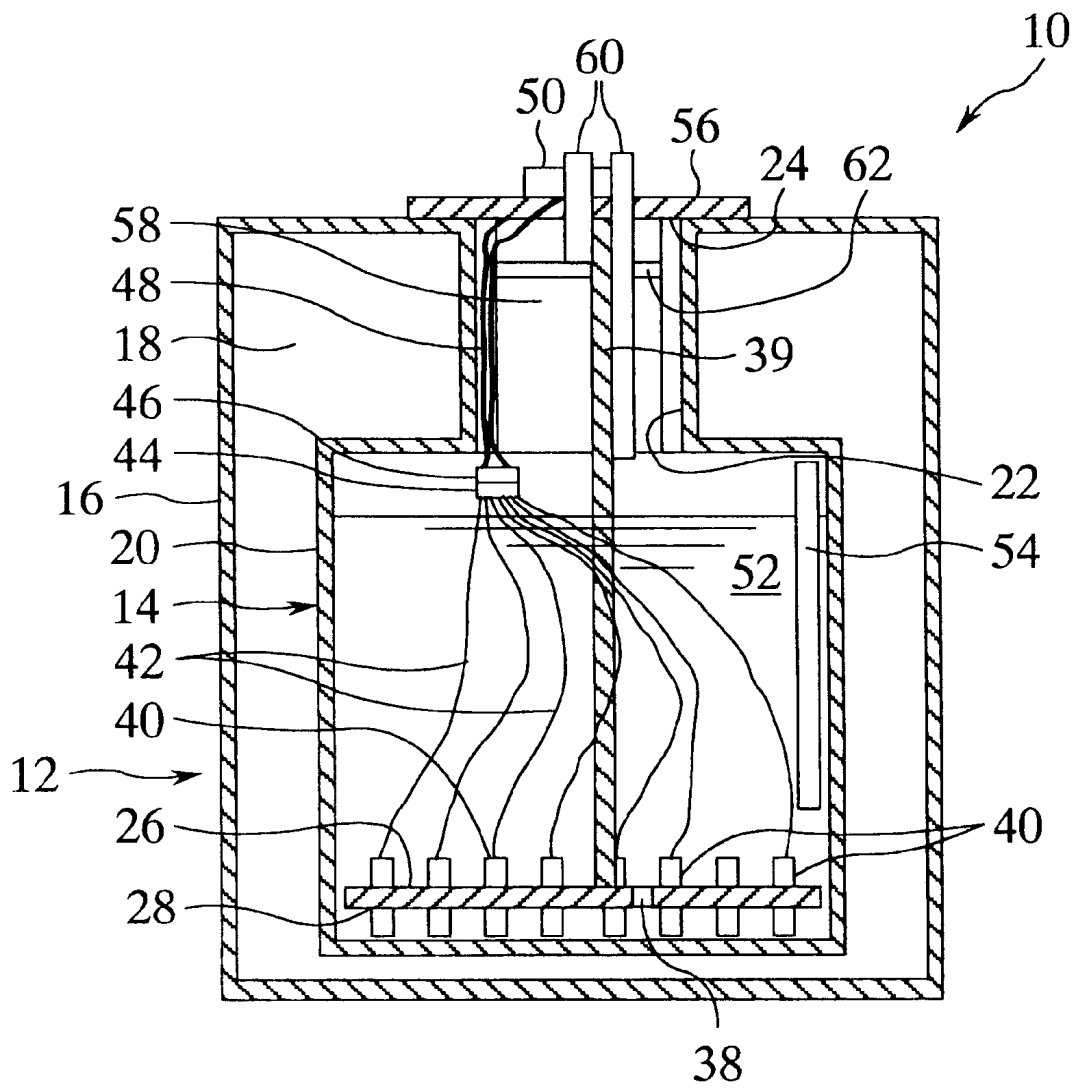


FIG. 9

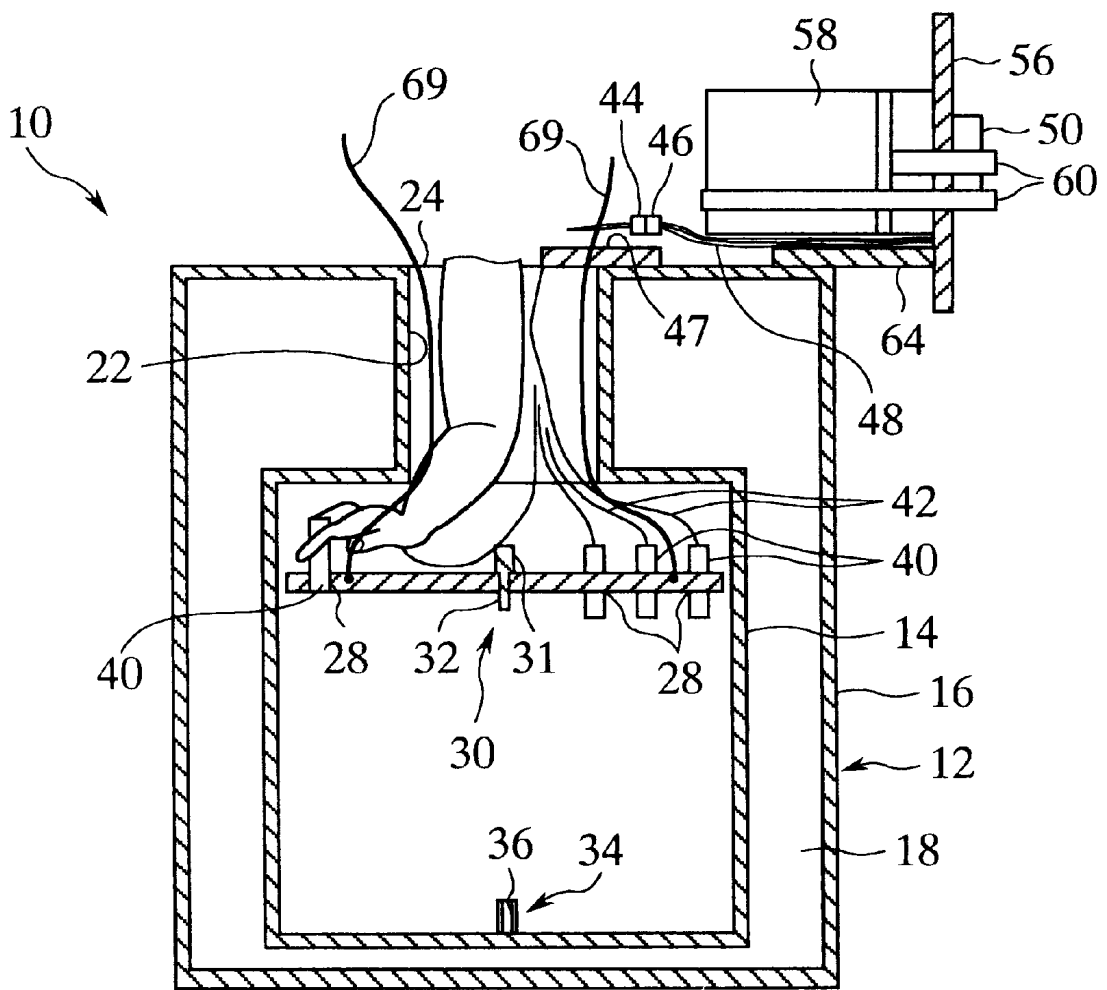


FIG. 10

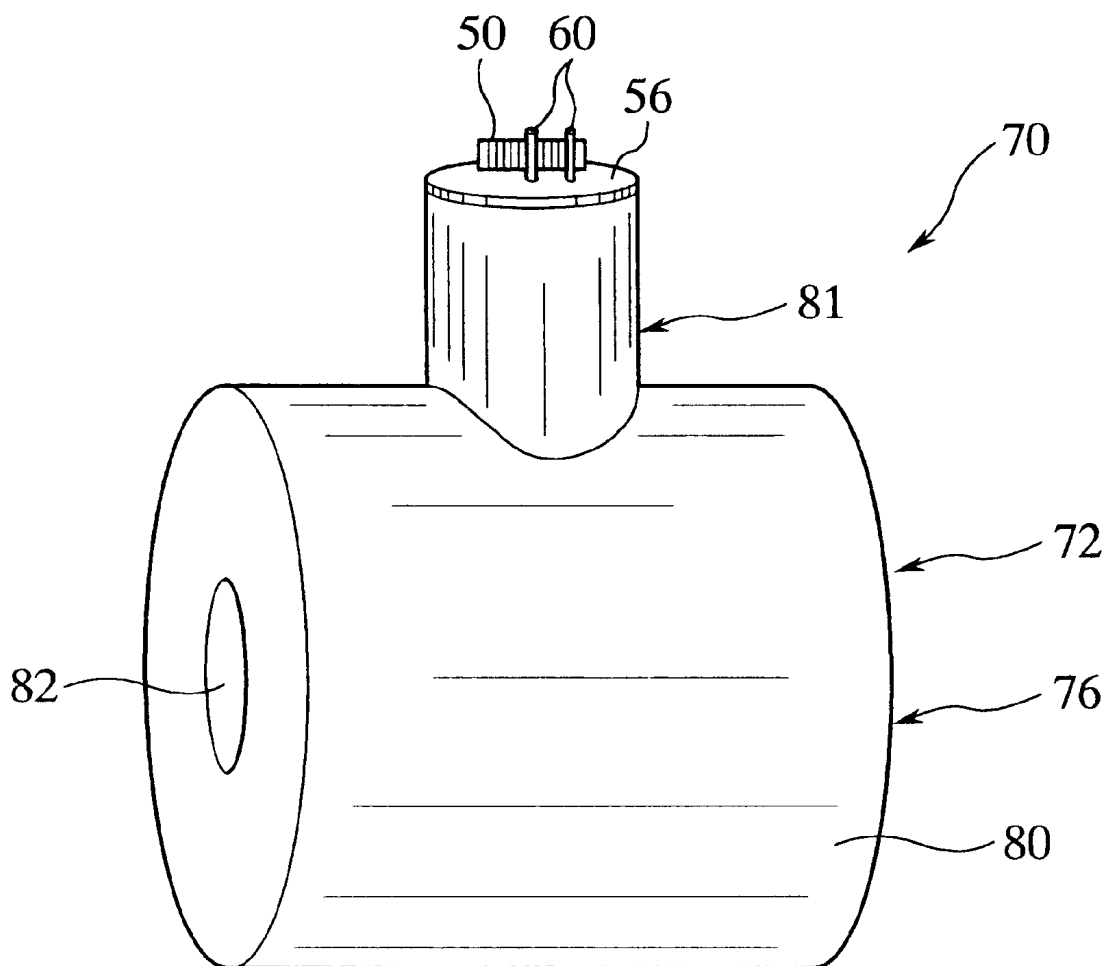


FIG. 11

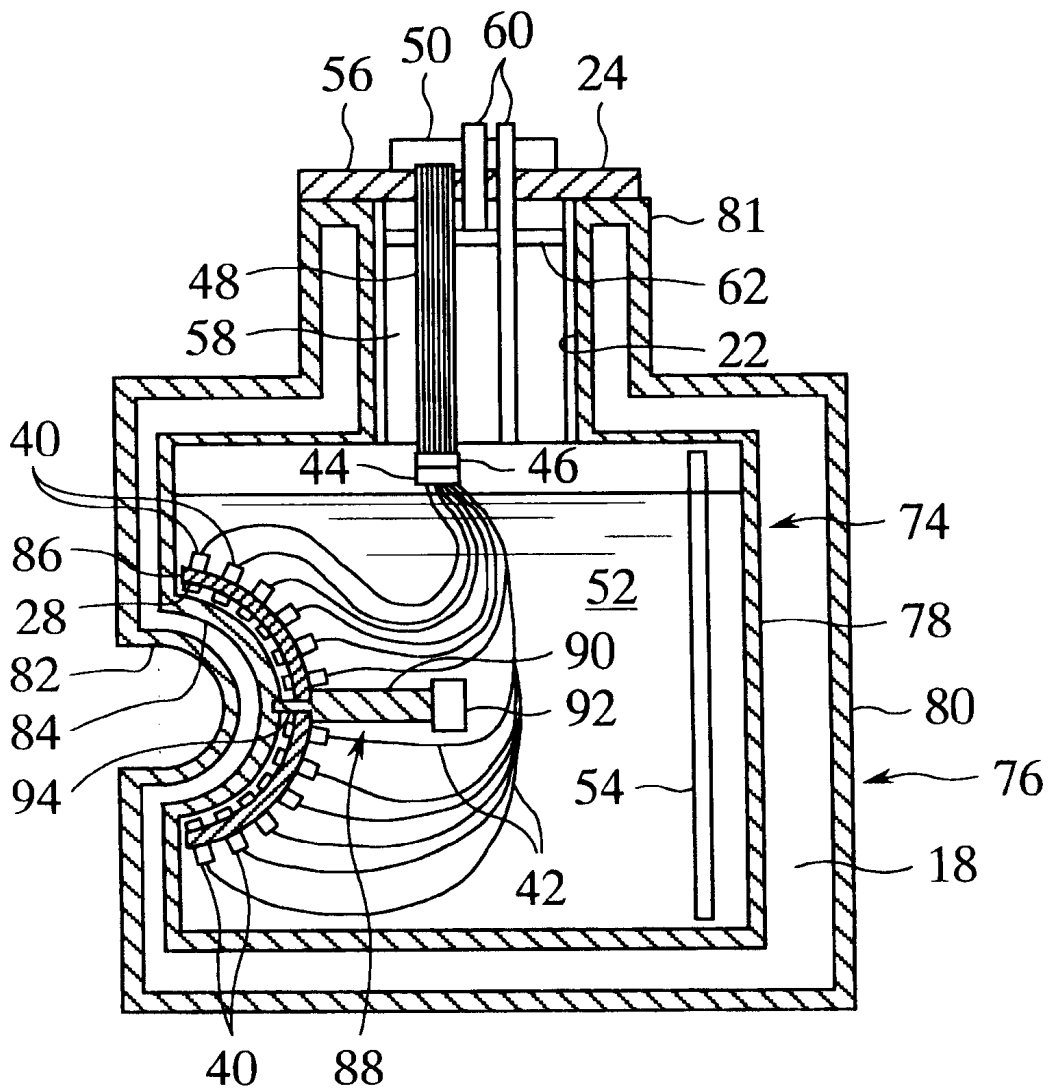


FIG. 12

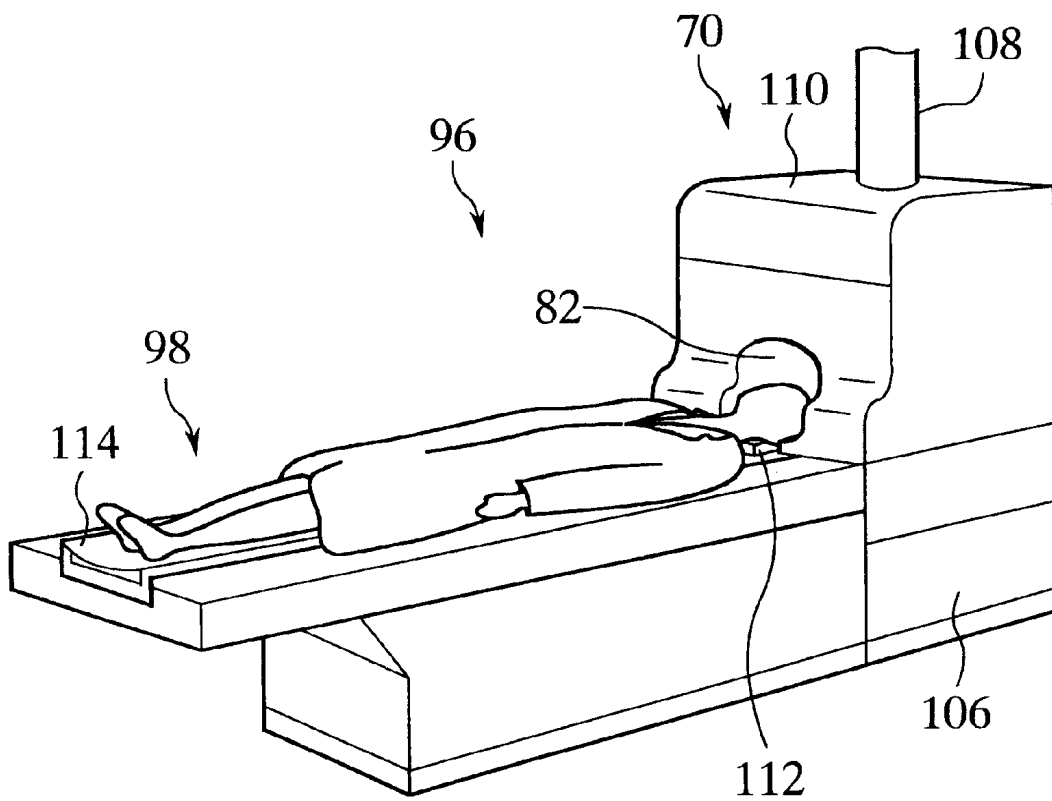


FIG.13

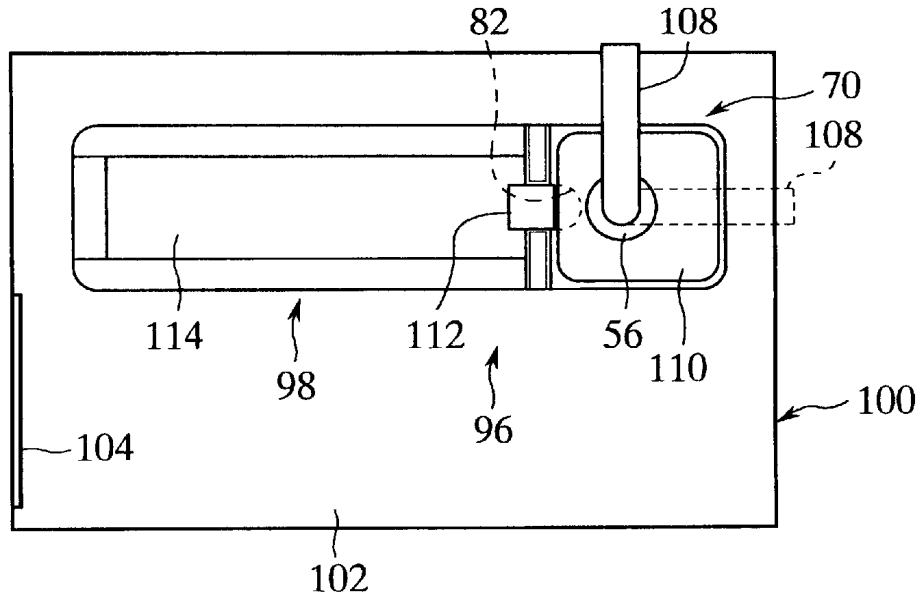


FIG.14

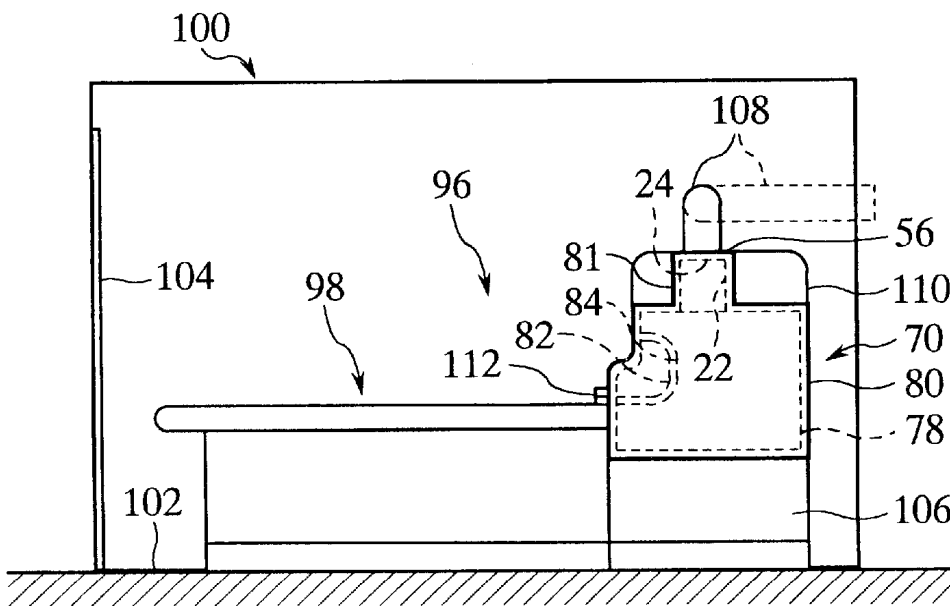


FIG. 15


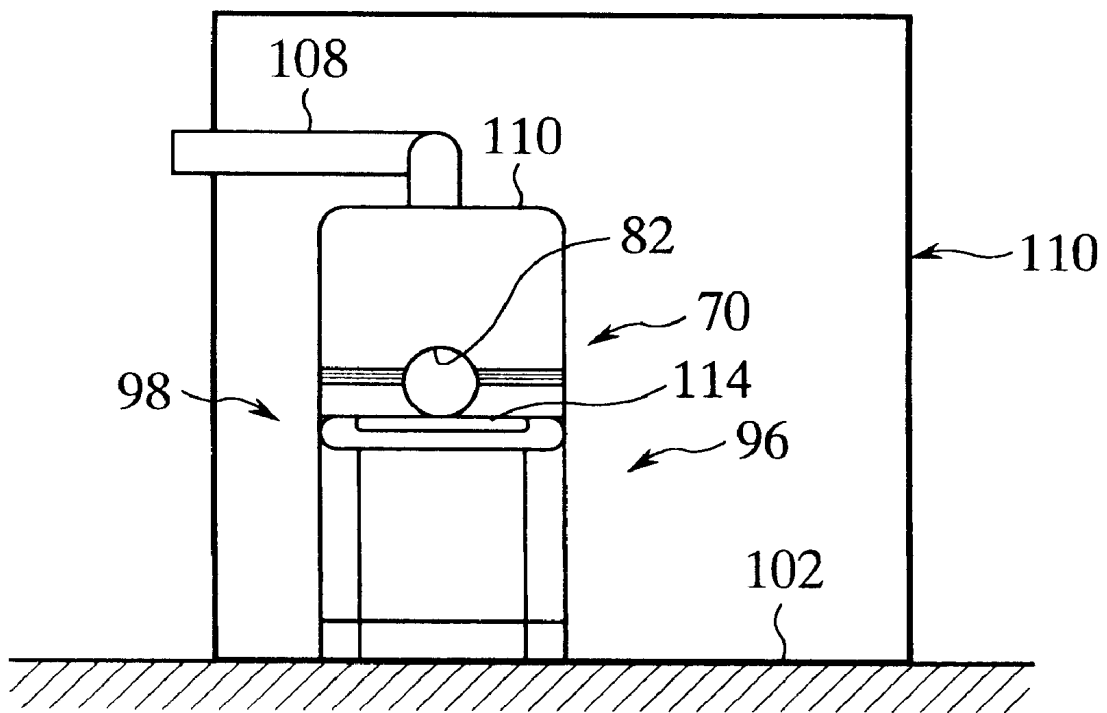


FIG. 16

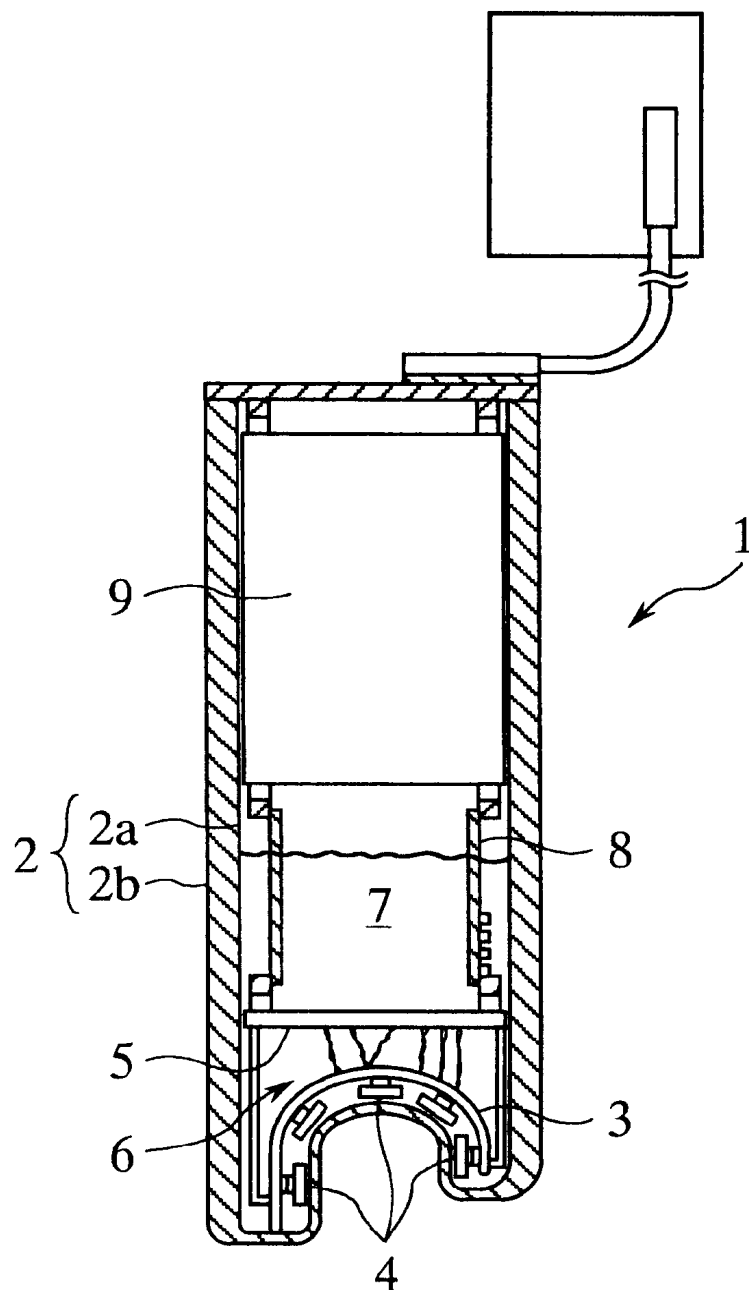

PRIOR ART

**MAGNETOMEASURING APPARATUS A
HAVING A COOLANT VESSEL WITH AN
ACCESS OPENING AND SENSOR SUPPORT
FOR LIMITING HEAT TRANSFER**

This is a division of application Ser. No. 08/764,818, filed Dec. 12, 1996 now U.S. Pat. No. 5,896,645.

BACKGROUND OF THE INVENTION

The present invention relates to a magnetomeasuring apparatus using superconducting quantum interference devices (SQUIDs) as magnetic field sensors, a method for assembling the same, a method for maintaining the same, and a diagnostic apparatus using the same.

Magnetomeasuring apparatuses using SQUIDs as magnetic field sensors are known. The SQUIDs have high sensitivities permitting the magnetomeasuring apparatus using the SQUIDs to measure weak biomagnetic fields.

One of such known magnetomeasuring apparatuses is a weak magnetic field measuring apparatus for measuring magnetic fields generated in, e.g., a head of a human, and is disclosed in Japanese Patent Laid-Open Publication No. Tokkai Hei 04-315075/1992. As shown in FIG. 16, a weak magnetic field measuring device 1 comprises a dewar vessel 2 including an inner vessel 2a and an outer vessel 2b. A bottom of the dewar vessel 2 is shaped in conformity with a head of a human being. A support shell 3 is accommodated in the bottom of the dewar vessel 2. The support shell 3 is formed in a shape contoured to the bottom of the dewar vessel 2. A plurality of SQUIDs 4 are arranged in the support shell 3, enclosing the bottom. The support shell 3 constitutes one unit 6 together with a mother board 5 in the form of a printed circuit board, etc. The unit 6 is submerged in liquid helium, a coolant. A neck plug 9 is disposed above the unit 6 on a support 8 and is housed in an upper part of the interior of the dewar vessel 2. The neck plug 9 comprises a radiation shielding and cabling unit. The support 8 has electric components mounted thereon.

The respective component members in the dewar vessel 2 are provided in units, and the unit 6 of the support shell 3 with the neck plug 9 and the support 8 can be removed from the dewar vessel 2 independently.

In order that a magnetomeasuring apparatus measures, with precision, a magnetic field over a wide range, it is necessary to arrange a number of magnetic field sensors over a wide range. Accordingly, the SQUIDs 4 of the weak magnetic field measuring apparatus 1 are mounted on the support shell 3 formed in a helmet-shape which can cover a head over a wide area. The support shell 3 must have an at least 30 cm-opening diameter, and the opening of the dewar vessel 2, through which the unit 6 including the support shell 3 is passed, has a diameter as large as above 30 cm.

Liquid helium, a coolant, is very volatile, and it is necessary to minimize intrusion of heat from the outside. Major routes of the heat intrusion into the dewar vessel 2 are the vacuum heat-insulating layer between the inner vessel 2a and the outer vessel 2b, and the opening of the dewar vessel 2. Loss of the liquid helium due to heat conduction in the opening and the wall of the dewar vessel 2a occupies a considerably high ratio, and the intruding heat reaches a considerably large total amount.

Thus, a large diameter of the opening of the dewar vessel 2 increases loss of the liquid helium in the dewar vessel 2 due to the intruded heat. Expensive liquid helium must be frequently supplied, which results in a disadvantage of higher maintenance costs.

An increase of a length of the opening of the dewar vessel 2 reduces heat conduction, but the dewar vessel 2 becomes taller. The taller dewar vessel 2 requires large rooms for installing the weak magnetic field measuring device 1.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a magnetomeasuring apparatus the vessel having a small opening so that the apparatus has a small total amount of heat intruding into the vessel, a method for assembling the same and a method for maintaining the same.

Another object of the present invention is to provide a diagnostic apparatus using the magnetomeasuring apparatus having a small opening so that the apparatus has a small total amount of heat intruding into the vessel.

The above-described objects are achieved by a magnetomeasuring apparatus including magnetic field sensors and a coolant held in a cooling vessel, comprising: a sensor support for disengageably supporting the magnetic field sensors; and fixing means for fixing the sensor support with the magnetic field sensors mounted thereon to a measuring surface of the cooling vessel wherein an opening of the cooling vessel has a smaller size than the measuring surface for the sensor support to be fixed to.

In the above-described magnetomeasuring apparatus, it is preferable that the measuring surface of the cooling vessel is formed in a concave shape for covering at least a part of a head of a human being at one side of the cooling vessel, and that the sensor support has a configuration which permits the magnetic field sensors to be arranged in conformity with the configuration of the measuring surface.

The above-described objects are achieved by a magnetomeasuring apparatus assembly method for assembling the magnetomeasuring apparatus, comprising the steps of disengaging a sensor support from a measuring surface of a coolant vessel, holding the sensor support near the opening of the cooling vessel, mounting magnetic field sensors on the sensor support, and fixing the sensor support with the magnetic field sensors mounted on to the measuring surface of the cooling vessel.

The above-described objects are achieved by a magnetomeasuring apparatus maintenance method for maintaining the magnetomeasuring apparatus, comprising the steps of disengaging the sensor support with the magnetic field sensors from the measuring surface of the cooling vessel, holding the sensor support near the opening of the cooling vessel, removing a defective one of the magnetic field sensors from the sensor support, mounting a normal magnetic field sensor in place of the defective one, and fixing the sensor support with the normal magnetic field sensor to the measuring surface of the cooling vessel.

The above-described objects are achieved by a diagnostic apparatus for magnetomeasurement comprising: a bed for a patient to be diagnosed to lie on; the above-described magnetomeasuring apparatus disposed on an end of the bed and arranged so that the head of the patient is to be positioned near the measuring surface.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a magnetomeasuring apparatus according to a first embodiment of the present invention.

FIG. 2 is a vertical sectional view of the magnetomeasuring apparatus according to the first embodiment of the present invention.

FIG. 3 is a cross-sectional view of the magnetomeasuring apparatus according to the first embodiment of the present invention, which shows an arrangement of magnetic field sensors.

FIGS. 4A and 4B are views showing an example of a structure for mounting magnetic field sensors on the sensor support in the magnetomeasuring apparatus according to the first embodiment of the present invention.

FIG. 5 is a view explaining mounting of magnetic field sensors on the sensor support in the magnetomeasuring apparatus according to the first embodiment of the present invention.

FIGS. 6A to 6C are views explaining a method for assembling the magnetomeasuring apparatus according to the first embodiment of the present invention.

FIGS. 7A to 7C are views explaining a method for maintaining the magnetomeasuring apparatus according to the first embodiment of the present invention.

FIG. 8 is a vertical sectional view of the magnetomeasuring apparatus according to the first embodiment of the present invention showing another example of securing the sensor support to the bottom of the inner vessel body.

FIG. 9 is a vertical sectional view of the magnetomeasuring apparatus according to the first embodiment of the present invention showing another example of lifting the sensor support.

FIG. 10 is a perspective view of a magnetomeasuring apparatus according to a second embodiment of the present invention.

FIG. 11 is a vertical sectional view of the magnetomeasuring apparatus according to the second embodiment of the present invention.

FIG. 12 is a perspective view of diagnostic apparatus using the magnetomeasuring apparatus according to the second embodiment of the present invention.

FIG. 13 is a plan view of the diagnostic apparatus using the magnetomeasuring apparatus according to the second embodiment of the present invention.

FIG. 14 is a front view of the diagnostic apparatus using the magnetomeasuring apparatus according to the second embodiment of the present invention.

FIG. 15 is a side view of the diagnostic apparatus using the magnetomeasuring apparatus according to the second embodiment of the present invention.

FIG. 16 is a sectional view of a conventional magnetomeasuring apparatus.

DETAILED DESCRIPTION OF THE INVENTION

A magnetomeasuring apparatus according to a first embodiment of the present invention is now explained with reference to FIGS. 1 to 9. FIG. 1 is a perspective view of the magnetomeasuring apparatus according to the first embodiment. FIG. 2 is a vertical sectional view of the magnetomeasuring apparatus according to the first embodiment. FIG. 3 is a cross-sectional view of the magnetomeasuring apparatus according to the first embodiment showing the arrangement of magnetic field sensors of the magnetomeasuring apparatus according to the first embodiment. FIGS. 4A and 4B are views showing an example of a structure for mounting magnetic field sensors on the sensor support in the magnetomeasuring apparatus according to the first embodiment of the present invention. FIG. 5 is a view showing a mounted state of the magnetic field sensors on the sensor support of the magnetomeasuring apparatus.

As shown in FIG. 1, the magnetomeasuring apparatus 10 includes a cryostat 12 which is a bottomed cylindrical vessel. As shown in FIG. 2, the cryostat 12 has a double structure of an inner bottomed cylindrical vessel 14 accommodated in an outer bottomed cylindrical vessel 16. A heat insulating material 18 is filled between the inner vessel 14 and the outer vessel 16.

The inner vessel 14 includes an inner vessel body 20, and a cylindrical opened space 22 projected from a top of the inner vessel body 20. The opened space 22 has an outlet and an inner diameter smaller than that of the inner vessel body 20. The opened space 22 has about a 14 cm-inner diameter and about a 30 cm-height. The outer vessel 16 has a top opening 24 which is in communication with the opened space 22.

A sensor support 26 is accommodated in the inner vessel body 20. The sensor support 26 is disc shaped and is a little smaller than the inner diameter than the inner vessel body 20. Its diameter is 30–40 cm. A plurality of holes 28 are formed at a substantially constant pitch in the entire surface of the sensor support 26.

As shown in FIG. 3, a male clamp 30 is provided at substantially a center of the surface of the sensor support 26. As shown in FIGS. 2 and 5, the male clamp 30 includes a knob 31 projected through a front surface of the sensor support 26 and an insert 32 projected through a back surface of the sensor support 26.

A female clamp 34, corresponding to the male clamp 30, is provided on the bottom of the vessel body 20. The female clamp 34 includes a receiver 36 for holding the insert 32 engaged therein. The insert 32 of the male clamp 30 is pushed in the receiver 36 of the female clamp 34, whereby, as shown in FIG. 2, the insert 32 is engaged with the receiver 36 and the male clamp 30 is connected to the female clamp 34. The insert 32 of the male clamp 30 is pulled out of the receiver 36 of the female clamp 34, whereby, as shown in FIG. 5, the insert 32 is disengaged from the receiver 36, and the male clamp 30 is separated from the female clamp 34. The clamps 30 and 34 may be replaced by screws.

As shown in FIGS. 2 and 3, a tapped hole 38 is formed in a substantially center portion of the surface of the sensor support 26. The tapped hole 38 may be within the male clamp 30. A lift rod 66, which will be described below, can be screwed into the tapped hole 38.

As shown in FIG. 3, magnetic field sensors 40, comprising SQUIDS, are engaged fixedly in respective ones of the holes 28 in the sensor support 26. The magnetic field sensors 40 are fixed in the sensor support 26 regularly at a constant pitch over substantially the entire surface of the sensor support 26. The magnetic field sensors 40 are preferably in the form of SQUIDS which can measure weak biomagnetic fields, including those generated in a head of a human being.

With reference to FIG. 4, an example of the structure for mounting the magnetic field sensor 40 on the sensor support 26 will be explained.

As shown in FIG. 4A, sensor supports 29 for supporting the magnetic field sensors 40 are provided in respective ones of the holes 26 in the sensor support 26. Each of the sensor supports 29 is in the shape of a thin cylinder. Slits 29a are formed in 2 to 4 upper parts of the cylinder, and a groove 29b is formed in an inside surface thereof. A ring 40a is formed on a circumference of each of the magnetic field sensors 40.

As shown in FIG. 4B, when the magnetic field sensor 40 is inserted into the sensor support 29, the slits 29a allow the upper part of the sensor support 29 to expand slightly outward to facilitate engagement of the magnetic field

sensor 40. When the magnetic field sensor 40 is further engaged into the sensor support 29, the ring 40a is engaged into the groove 29b in the sensor support 29 and thereby positioned.

To measure a magnetic field distribution over a wide range when measuring magnetic fields, it is necessary to arrange a number of the magnetic field sensors 40 over a wide range. To this end, the sensor support 26 is formed sufficiently wide to accommodate a number of the magnetic field sensors 40 necessary for objects to be measured.

As shown in FIG. 2, measuring cords 42 are led out from the respective magnetic field sensors 40. The respective measuring cords 42 led out from the respective magnetic field sensors 40 are collected by a cord connector 44. The cord connector 44 is connected to a wiring connector 46. All the necessary number of wiring cords 48 are collected at the wiring connector 46. The wiring cords 48 are connected to a cord output 50 disposed on an outside surface of a cap 56, which will be described later, through a gap between a heat insulator 58 and the opened space 22. The wiring cord 48 is formed of a high electric resistance wire having low heat conductivity, whereby heat intrusion due to the heat conduction is suppressed to low levels.

The inner vessel body 20 holds liquid helium 52 in which the magnetic field sensors 40 are submerged (see FIG. 2). The liquid helium 52 is a coolant for the magnetic field sensors 40. A level sensor 54 is disposed inside the inner vessel body 20 vertically along an inside wall thereof. The level sensor 54 detects a level of the liquid helium 52 held in the inner vessel body 20.

As shown in FIGS. 1 and 2, the top opening 24 of the outer vessel 16 is closed by a cap 56 having a larger diameter than the top opening 24. The cap 56 prevents vaporization due to contact between air and the liquid helium 52. On an underside of the cap 56 there is provided the cylindrical heat insulation portion 58 having a little smaller configuration than an inner diameter of the opened space 22 and substantially the same height as the opened space 22. When the cap 56 closes the top opening 24, the heat insulation portion 58 is inserted into the opened space 22.

In the cap 56 there are provided two charge/discharge pipes 60 which are opened on the outer side of the cap 56. As shown in FIG. 2, one of the charge/discharge pipes 60 has an end communicated with a communication hole 62 of the heat insulation portion 58, and the other of the charge/discharge pipes 60 has an end opened at the underside of the heat insulation portion 58. The communication hole 62 crosses the heat insulation portion 58 and opens at an outer circumference at opposed positions. Liquid helium is fed into the inner vessel body 20 through the charge/discharge pipe 60 or helium gas is discharged from the inner vessel body 20.

The inner vessel 14, the outer vessel 16, and almost all constituent members of the cryostat 12 are formed of non-magnetic and non-conducting material, such as fiber-reinforced resin or others. The heat insulation portion 58 is formed of heat insulating material comprising multi-layers of polyester resin foils with aluminium vapor deposited thereon.

The bottoms of the inner vessel 14 and the outer vessel 16 are not essentially flat and may have arbitrary shapes as required. For example, the bottoms may be helmet-shaped.

The mounting of the magnetic field sensors 40 on the sensor support 26 is carried out when the magnetomeasuring apparatus 10 is first assembled and when defective ones of the magnetic field sensors 40 are replaced by new ones during maintenance.

In order to mount the magnetic field sensors 40 on the sensor support 26 having a larger diameter than an inner diameter than the opening 22 of the inner vessel 14, as shown in FIG. 5, an operator puts a hand into inner vessel 14 through the opening 22 while the sensor support 26 is pulled up to a lower end of the opening 22.

The method for assembling the magnetomeasuring apparatus 10 by mounting the magnetic field sensors 40 on the sensor support 26 is explained with reference to FIG. 6.

First, the opening 24 of the outer vessel 16 of the cryostat 12 is opened. The cap 56 closing the upper opening 24 is lifted to pull out the heat insulation portion 58. The cap 56 is disengaged from the top opening 24 and is rested horizontal on the cap support 64. In the inner vessel 14 of the cryostat 12, the sensor support 26 is secured to the bottom surface of the inner vessel 14 by the engagement between the male clamp 30 and the female clamp 34. The sensor support 26 is installed in the inner vessel 14 when the inner vessel 14 is fabricated and assembled.

Then, the male clamp 30 is disengaged from the female clamp 34 by using the lift rod 66. The lift rod 66 has a length greater than a distance from the top opening 24 to the inside bottom of the inner vessel 14, and has a threaded portion 68 for engaging a tapped hole 38 of the sensor support 26. The lift rod 66 is registered with the tapped hole 38 of the sensor support 26 and turned to be threaded into the tapped hole 38 of the sensor support 26. The lift rod 66 and the sensor support 26 are then lifted. By lifting the lift rod 66, the male clamp 30 is pulled and disengaged from the female clamp 34. After the male clamp 30 is disengaged from the female clamp 34, the sensor support 26 is lifted up to the vicinity of the open space 22.

Then, the lifted sensor support 26 is held in the lifted state as shown in FIG. 6B. The lift rod 66, engaged with the lifted sensor support 26, is secured to a rod support 67 provided on the top surface of the outer vessel 16 proximate the top opening 24.

Then, as shown in FIG. 6B, a magnetic field sensor 40 is inserted by hand into the opened space 22, through the top opening 24, to be mounted on the sensor support 26. The open space 22 has about a 14 cm-diameter which allows the hand and arm holding the magnetic field sensor 40 to be put into the open space 22. The operation is monitored through the open space 22 by a fiberscope, a CCD camera, a mirror or other observation means.

The measuring cords 42 of the respective magnetic field sensors 40 are wired to the cord output 50 through the cord connector 44 connected to the wiring connector 46. The magnetic field sensors 40 are pushed into the holes 28 to be secured to the sensor support 26.

Then, as shown in FIG. 6C, the sensor support 26 with the magnetic field sensors 40 mounted thereon is secured to the bottom surface of the inner vessel 14. When the mounting of the magnetic field sensors 40 on the sensor support 26 is completed, the lift rod 66 is held hand and removed from the rod support 67 and lowered in the inner vessel 14. When the sensor support 26 approaches the bottom surface of the inner vessel 14, the male clamp 30 of the sensor support 26 is registered with the female clamp 34, and the lift rod 66 is pushed downward to engage the male clamp 30 with the female clamp 34.

Then, the lift rod 66 is removed from the sensor support 26. The lift rod 66, which is screwed into the sensor support 26, is turned in an opposite direction then before to be disengaged from the sensor support 26. The lift rod 66 is removed from the sensor support 26 and is taken out of the inner vessel 14.

Thus, the magnetic field sensors **40** are mounted on the sensor support **26** without taking the sensor support **26** out of the inner vessel **14** to assemble the magnetomeasuring apparatus **10**.

Next, the method for maintaining the magnetomeasuring apparatus by replacing magnetic field sensors **40** mounted on the sensor support **26** is explained with reference to FIG. 7. Steps of the maintenance method similar to those of the assembling method will not be explained to simplify the explanation of the maintenance method.

First, the top opening **24** of the outer vessel **16** of the cryostat **12** is opened. The cap **56** is removed from the top opening **24** and is rested on the cap support **64**. In the inner vessel **14** of the cryostat **12**, the sensor support **26** with the magnetic field sensors **40** mounted thereon is secured to the bottom surface of the inner vessel **14**. The measuring cords **42** of the respective sensors **40** are wired to the cord output **50** through the cord connector **44** connected to the wiring connector **46**. The liquid helium **52** in the inner vessel **14** is discharged in advance from the inner vessel **14**.

Then, the male clamp **30** is disengaged from the female clamp **34**. The lift rod **66** is lifted to disengage the male clamp **30** from the female clamp **34** and lift the sensor support **26** up to near the lower end of the opened space **22**. Then, the lifted sensor support **26** is held in the state shown in FIG. 7B.

Next, as shown in FIG. 7B, a hand is put into the opened space **22** through the top opening **24** to pull a magnetic field sensor **40**, which is to be replaced, from the sensor support **26**.

The measuring cord of a new magnetic field sensor **40**, replacing the pulled-out magnetic field sensor **40**, is wired to the cord output **50** through the cord connector **44** connected to the wiring connector **46**.

Then, as shown in FIG. 7B, the new magnetic field sensor **40**, whose measuring cord has been wired to the cord output **50**, is held by hand and put into the open space **22** through the top opening **24**, and is then mounted on the sensor support **26**.

Then, as shown in FIG. 7C, the sensor support **26**, with the new magnetic field sensor **40** mounted thereon, is secured to the bottom surface of the inner vessel **14**.

Then, the lift rod **66** is removed from the sensor support **26**.

Thus, even if one of the magnetic field sensors **26** malfunctions, the defective magnetic field sensor can be replaced by a normal magnetic field sensor without taking the sensor support **26** out of the inner vessel **14**.

As described above, according to the present embodiment, it suffices that the open space **22** has a size sufficient for a human hand to pass through, e.g., has about a 14 cm diameter, a 2–3 mm thickness and about a 30 cm length. The conventional magnetomeasuring apparatus has a 30–40 cm diameter, a 4–5 mm thickness and a 40–50 cm length. In comparison with the conventional apparatus, the magnetomeasuring apparatus according to the present invention is reduced to a diameter which is $\frac{1}{2}$ – $\frac{1}{3}$ of the conventional apparatus, and a length which is about $\frac{1}{3}$ of the conventional apparatus.

The heat conducted through the open space **22** is proportional to a diameter of the open space **22**, and heat conducted through the heat insulation material inserted in the open space **22** is proportional to a sectional area, or square of a diameter of the open space **22**, and linearly proportional to a length of the open space **22**. Even in consideration of a heat

conduction increase due to the smaller length, heat intrusion occurring because of the open space **22** is drastically decreased in comparison with that in conventional magnetomeasuring apparatuses. In the present embodiment, the clamps **30**, **34** are used to secure the sensor support **26** to the bottom surface of the inner vessel body **20**, but different means may be used as alternatives.

As shown in FIG. 8, for example, the sensor support **26** may be fixed by a support rod **39** which is in turn fixed to the cap **56**, and passes through the heat insulation portion **22** to the sensor support **26**. The support rod **39** is formed of FRP. The sensor support **26** is pressed against the bottom surface of the inner vessel body **20** by flexibility exhibited when the support rod **39** is flexed. A single support rod **39** or a plurality of support rods **38** may be used.

In the present embodiment, the sensor support **26** is lifted by the lift rod **66** but may be lifted by different means. As shown in FIG. 9, however, a plurality of strings **69** of glass fiber or plastics are fixed to the sensor support **26**, and when the sensor support **26** is lifted, the strings **69** are pulled up to lift the sensor support **26**. The lift rod **66** and the strings **69** may be used together.

Next, the magnetomeasuring apparatus according to a second embodiment of the present invention is explained with reference to FIGS. 10 and 11. FIG. 10 is a perspective view of the magnetomeasuring apparatus, and FIG. 11 is a vertical sectional view of the magnetomeasuring apparatus.

As shown in FIGS. 10 and 11, the magnetomeasuring apparatus **70** has the same structure as the magnetomeasuring apparatus according to the first embodiment except that the former includes a concavity in one side and a configuration which contains the open space **22** upwardly projected.

As shown in FIG. 11, the cryostat **72** has a double structure of an inner vessel **74** accommodated in an outer vessel **76** similar to the inner vessel, and a heat insulation material **18** is filled between the inner and the outer vessels **74**, **76**.

The inner vessel **74** has the open space **22** projected from a substantially central part of an inner vessel body **78** having a horizontal cylindrical shape. The outer vessel **76** has an outer vessel open space **81** projected from a substantially central part of an outer vessel body **80**. A top opening **24**, which is in communication with the open space **22**, is formed in the outer vessel open space **81**. The top opening **24** is closed by the cap **56**.

As shown in FIG. 11, a helmet-shaped concavity **82** which opens outward is formed horizontally in one side surface of the outer vessel body **80**. The concavity **82** has a helmet-shape and a size which can accommodate the head of a person to be measured. An inner vessel concavity **84** is formed in the inner vessel body **78** in agreement with the concavity **82**. A sensor support **86** is provided inside the inner vessel concavity **84**. As shown in FIG. 11, the sensor support **86** is formed in the form of a dome of about a 30 cm diameter which covers the inner vessel concavity **84**. In the sensor support **86** there are formed a plurality of holes **28** in the entire surface thereof. On the substantially central part of the surface of the sensor support **86** there is provided a male clamp **88** which is similar to the male clamp **30** of the magnetomeasuring apparatus **10**. The male clamp **88** includes a long handle **90** which reaches the substantial center of an interior of the inner vessel **74**. A sensor **92**, which detects an environmental magnetic field, is mounted on a forward end of the handle **90**. One set or a plurality of sets of the sensors **92** may be mounted thereon. A female clamp **94**, which is similar to the female clamp **34** of the

magnetomeasuring apparatus **10**, is provided on the inner vessel concavity **84**.

Magnetic field sensors **40**, comprising SQUIDS, are disposed in the respective holes of the sensor support **86**. Each of the magnetic field sensors **40** has a rod shape and is inserted in each of the holes to be secured to the sensor support **86**.

The respective magnetic field sensors **40** are wired to the cord output **50** through measuring cords **42**, a cord connector **42**, a wire connector **46** and a wiring cords **48**.

At first, liquid helium **52** is reserved in the inner vessel body **78** up to an 80%-level so that the magnetic field sensors **40** are immersed. The liquid helium **52** is a coolant for the magnetic field sensors **40**. A liquid level of the liquid helium **52** in the inner vessel body **78** is detected by a level sensor **54** disposed inside the inner vessel body **78**.

The measuring cords **42** are formed of copper wires, and have good heat conduction which makes a temperature of the inner vessel body **78** uniform. As a result, even when a liquid level of the liquid helium is lowered, and the magnetic field sensors **40** are exposed to gas phase helium, temperature increase can be suppressed, and the magnetic field detection is not affected.

Most of the constituent members of the cryostat **72** are formed of non-magnetic and non-conducting material, such as fiber reinforced resins, etc. so that they do not interfere with the detection of magnetic fields.

The mounting of the magnetic field sensors **40** on the sensor support **86** is carried out, when the magnetomeasuring apparatus **70** is assembled at the start, and when defective ones of the magnetic field sensors **40** are replaced by new ones for maintenance.

In order to mount the magnetic field sensors **40** on the sensor support **86** having a larger diameter than an inner diameter than the open space **22** of the inner vessel **14**, as in the above-described magnetomeasuring apparatus **10**, an operator puts a hand into the inner vessel **14** through the open space **22** when the sensor support **86** is pulled up to the lower end of the open space **22**.

In the present embodiment, the method for mounting the magnetic field sensors **40** on the sensor support **86** and assembling the magnetomeasuring apparatus **70** is substantially the same as that for assembling the magnetomeasuring apparatus according to the first embodiment, but is different from the first embodiment in the method for removing the sensor support **86** from the inner vessel concavity **84**.

In removing the sensor support **86**, a hand is put into the inner vessel **74** through the open space **22** to pull the male clamp **88** and disengage the male clamp **88** from the female clamp **94**. The sensor support **86**, removed from the inner vessel concavity **84**, is rested on rod support (not shown) through a lift rod or lift strings (not shown).

Thus, without taking the sensor support **86** out of the inner vessel **74**, the magnetic field sensors **40** are mounted on the sensor support **86** to assemble the magnetomeasuring apparatus **70**.

Similarly without taking the sensor support **86** out of the inner vessel **74**, the magnetic field sensors **40** mounted on the sensor support **86** are replaced during maintenance.

An example of a diagnostic apparatus using the magnetomeasuring apparatus according to the present embodiment is explained with reference to FIGS. **12** to **15**. FIG. **12** is a perspective view of the diagnostic apparatus, FIG. **13** is a plan view of the diagnostic apparatus, FIG. **14** is a front view of the diagnostic apparatus, and FIG. **15** is a side view of the diagnostic apparatus.

As shown in FIG. **12**, the diagnostic apparatus **96** comprises the magnetomeasuring apparatus **70** disposed on one end of a bed for a patient to lie on. As shown in FIGS. **13** to **15**, the diagnostic apparatus **96** is placed on a floor **102** in a magnetically shielded room **100**.

The magnetically shielded room **100** has an entrance/exit door **104**. The cryostat **72** of the magnetomeasuring apparatus **70** is mounted on a table **106**. A duct **108** is provided in the top side of the cryostat **72** opposed to the bed and upwardly extended outside. The duct **108** accommodates a charge/discharge pipe **60** provided in the cap **56**, and the wiring (not shown) from the cord output **50**. The duct **108** may be disposed in another side and extended outside the magnetically shielded room **100** as indicated by the dotted line. The top side of the cryostat **72**, except the duct **108**, is covered with a cover **110**.

The bed **98** is positioned with a height adjusted so that the head of a patient lying on the bed **98** can be inserted in the concavity **82** of the cryostat **72**. The bed **98** includes a movable table **114** with a pillow **12** at the side of the concavity **82**. The movable table **114** is moved to and from the concavity **82** with a patient lying on with the head placed on the pillow **112**.

Thus, the patient can have magnetic field distributions occurring in the head detected by the magnetic field sensors **40** while lying on the bed **98**.

The magnetomeasuring apparatus **70** includes the magnetic field sensors **40** arranged so as to cover the head of the lying patient, thus the cryostat **72** is lowered in height and the magnetomeasuring apparatus **70** is also lowered in height.

Accordingly, a ceiling of the magnetically shielded room **100** for the magnetomeasuring apparatus **70** can be lowered. As a result, the magnetically shielded room **100** including the diagnostic apparatus can be placed in ordinary room having low ceilings.

The present invention is not limited to the above-described embodiments and covers other various modifications.

For example, the measuring surface of the sensor support **26**, **86** is not essentially disk shaped and helmet-shaped. The cryostat **12**, **27**, including the inner vessel **14**, **4** and the outer vessel **16**, **76**, is not essentially cylindrical. The open space **22** of the inner vessel **14**, **74** is not essentially cylindrical.

The magnetic field sensors **40** are mounted by putting a hand into the open space **22**, but may be mounted by the use of mounting means which can be operated by remote control.

In engaging and disengaging the sensor support **26**, **86** with and from the inner vessel **14**, **74**, without using the lift rod **66**, a hand is put into the inner vessel **14**, **74** through the open space **22** to directly hold the handle **31**, **90** by the hand so as to engage and disengage the sensor support **26**, **86**.

What is claimed is:

1. A magnetomeasuring apparatus comprising:

- magnetic field sensors;
- a sensor support for disengageably supporting said magnetic field sensors;
- a coolant vessel having an interior with a measuring surface and said sensor support disposed in said interior at said measuring surface;
- fixing means for disengageably fixing said sensor support, with said magnetic field sensors mounted thereon, to said measuring surface of the cooling vessel, thereby permitting removal of said sensor support from said measuring surface; and

11

said cooling vessel having an opening, disposed for accessing said magnetic field sensors, which has a smaller size than the measuring surface and a greater size than ones of said magnetic field sensors to permit installation of said magnetic field sensors on said support surface via said opening. 5

2. The magnetomeasuring apparatus according to claim 1, wherein:

said measuring surface of said cooling vessel is formed in a side of said coolant vessel and defines a concavity, in an outside surface of said coolant vessel, adapted to cover at least a part of a head of a human; and 10

said sensor support has a configuration which permits said magnetic field sensors to be disposed in conformance with a contour of the measuring surface. 15

3. A magnetomeasuring apparatus comprising:

magnetic field sensors;

a sensor support for disengageably supporting said magnetic field sensors; 20

a coolant vessel having an interior with a measuring surface and said sensor support disposed in said interior at said measuring surface;

12

fixing means for disengageably fixing said sensor support, with said magnetic field sensors mounted thereon, to said measuring surface of the cooling vessel, thereby permitting removal of said sensor support from said measuring surface; and

said cooling vessel having an opening, disposed for accessing said magnetic field sensors, which has a smaller size than said support surface and a greater size than ones of said magnetic field sensors to permit installation of said magnetic field sensors on said support surface via said opening.

4. The magnetomeasuring apparatus according to claim 3, wherein:

said measuring surface of said cooling vessel is formed in a side of said coolant vessel and defines a concavity, in an outside surface of said coolant vessel, adapted to cover at least a part of a head of a human; and

said sensor support has a configuration disposing said magnetic field sensors in conformance with a contour of the measuring surface.

* * * * *