



US009947803B2

(12) **United States Patent**
Hosono et al.

(10) **Patent No.:** **US 9,947,803 B2**
(45) **Date of Patent:** ***Apr. 17, 2018**

(54) **AMORPHOUS OXIDE AND THIN FILM TRANSISTOR**

(75) Inventors: **Hideo Hosono**, Kanagawa (JP); **Masahiro Hirano**, Tokyo (JP); **Hiromichi Ota**, Aichi (JP); **Toshio Kamiya**, Kanagawa (JP); **Kenji Nomura**, Tokyo (JP)

(73) Assignees: **JAPAN SCIENCE AND TECHNOLOGY AGENCY**, Saitama (JP); **CANON KABUSHIKI KAISHA**, Tokyo (JP); **TOKYO INSTITUTE OF TECH**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/097,572**

(22) Filed: **Apr. 29, 2011**

(65) **Prior Publication Data**
US 2011/0201162 A1 Aug. 18, 2011

Related U.S. Application Data

(60) Continuation of application No. 12/504,158, filed on Jul. 16, 2009, now abandoned, which is a division of (Continued)

(30) **Foreign Application Priority Data**

Mar. 12, 2004 (JP) 2004-071477
Nov. 10, 2004 (JP) 2004-325938

(51) **Int. Cl.**
H01L 21/336 (2006.01)
H01L 29/786 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 29/78696** (2013.01); **C23C 14/0021** (2013.01); **C23C 14/086** (2013.01);
(Continued)

(58) **Field of Classification Search**
USPC ... 257/43, 49, 52, 57, 66, 103, 289, E29.08, 257/E29.1, E29.101, E21.462; 438/104
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,400,254 A 8/1983 Freller et al.
5,622,653 A 4/1997 Orita et al.
(Continued)

FOREIGN PATENT DOCUMENTS

EP 1443130 A1 8/2004
JP 63-239117 A 10/1988
(Continued)


OTHER PUBLICATIONS

Carcia, P. F. et al., "Transparent ZnO thin-film transistor fabricated by rf magnetron sputtering", Applied Physics Letters, Feb. 17, 2003, pp. 1117-1119, vol. 82, No. 7.*
(Continued)

Primary Examiner — Hrayr A Sayadian
(74) *Attorney, Agent, or Firm* — Westerman, Hattori, Daniels & Adrian, LLP

(57) **ABSTRACT**

The present invention relates to an amorphous oxide and a thin film transistor using the amorphous oxide. In particular, the present invention provides an amorphous oxide having an electron carrier concentration less than $10^{18}/\text{cm}^3$, and a thin film transistor using such an amorphous oxide. In a thin film transistor having a source electrode 6, a drain electrode 5, a gate electrode 4, a gate insulating film 3, and a channel (Continued)

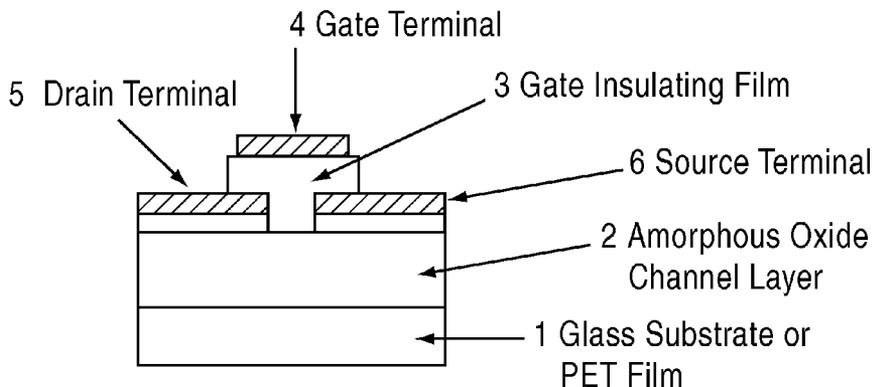

layer 2, an amorphous oxide having an electron carrier concentration less than $10^{18}/\text{cm}^3$ is used in the channel layer 2.

4 Claims, 6 Drawing Sheets

Related U.S. Application Data

application No. 10/592,431, filed as application No. PCT/JP2005/003273 on Feb. 28, 2005, now abandoned.

- (51) **Int. Cl.**
C23C 14/00 (2006.01)
C23C 14/08 (2006.01)
C23C 14/28 (2006.01)
C23C 14/34 (2006.01)
H01L 21/02 (2006.01)
H01L 27/12 (2006.01)
- (52) **U.S. Cl.**
 CPC *C23C 14/28* (2013.01); *C23C 14/3414* (2013.01); *H01L 21/02554* (2013.01); *H01L 21/02565* (2013.01); *H01L 21/02631* (2013.01); *H01L 27/1225* (2013.01); *H01L 29/7869* (2013.01); *H01L 29/78693* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,681,671 A	10/1997	Orita et al.	
5,744,864 A	4/1998	Cillessen et al.	
5,817,550 A *	10/1998	Carey	H01L 21/268 257/E21.119
5,843,341 A	12/1998	Orita et al.	
5,910,761 A *	6/1999	Kobayashi et al.	338/21
5,955,178 A	9/1999	Orita et al.	
6,294,274 B1	9/2001	Kawazoe et al.	
6,727,522 B1	4/2004	Kawasaki et al.	
6,969,536 B1	11/2005	Tuck et al.	
7,061,014 B2 *	6/2006	Hosono et al.	257/43
7,863,611 B2 *	1/2011	Abe et al.	257/58
2001/0019244 A1 *	9/2001	Yamazaki et al.	313/506
2001/0055838 A1	12/2001	Walker et al.	
2003/0047785 A1	3/2003	Kawasaki et al.	
2003/0160260 A1	8/2003	Hirai et al.	
2003/0218221 A1	11/2003	Wager, III et al.	
2003/0218222 A1	11/2003	Wager, III et al.	
2004/0127038 A1	7/2004	Carcia et al.	
2005/0017244 A1 *	1/2005	Hoffman et al.	257/72
2005/0151210 A1	7/2005	Li et al.	
2005/0173734 A1 *	8/2005	Yoshioka et al.	257/202
2005/0199879 A1	9/2005	Hoffman et al.	
2005/0199880 A1	9/2005	Hoffman et al.	
2005/0199881 A1	9/2005	Hoffman et al.	
2005/0199959 A1 *	9/2005	Chiang	H01L 29/7869 257/368
2005/0199960 A1	9/2005	Hoffman et al.	
2005/0199961 A1	9/2005	Hoffman et al.	
2005/0199967 A1 *	9/2005	Hoffman	H01L 29/7869 257/411
2005/0227107 A1 *	10/2005	Burgard et al.	428/689
2006/0113565 A1	6/2006	Abe et al.	
2007/0194379 A1 *	8/2007	Hosono et al.	257/347
2009/0045397 A1 *	2/2009	Iwasaki	257/43

FOREIGN PATENT DOCUMENTS

JP	5-251705 A	9/1993
JP	8-245220 A	9/1996
JP	2000-044236 A	2/2000

JP	2002-076356 A	3/2002	
JP	2002-266012 A	9/2002	
JP	2002-289859 A	10/2002	
JP	2003-086808 A	3/2003	
JP	2003-298062 A	10/2003	
JP	2004-071477 A	3/2004	
JP	2004-103957 A	4/2004	
JP	2004-325938 A	11/2004	
WO	03/040441 A1	5/2003	
WO	WO 2005088726 A1 *	9/2005 C23C 14/0021

OTHER PUBLICATIONS

Carcia, P. F. et al., "ZnO Thin Film Transistors for Flexible Electronics", Mat. Res. Soc. Symp. Proc. 2003, vol. 769, pp. H7.2.1- H7.2.6.*

Ohta, H. et al., "Frontier of transparent oxide semiconductors", Solid-State Electronics, Dec. 2003, pp. 2261-2267, vol. 47, Issue 12.

Nomura, K. et al., "Room-Temperature Fabrication of Transparent Flexible Thin-Film Transistors Using Amorphous Oxide Semiconductors" Nature, Nov. 2004, pp. 488-492, vol. 432.

Carcia, P. F. et al., "ZnO Thin Film Transistors for Flexible Electronics", Mat. Res. Soc. Symp. Proc. 2003, vol. 769, pp. H7.2.1-H7.2.6.

Millman J. et al., "Integrated Electronics: Analog and Digital Circuits and Systems", 1972, pp. 49-52.

Narushima, S. et al., "A p-Type Amorphous Oxide Semiconductor and Room Temperature Fabrication of Amorphous Oxide p-n Heterojunction Diodes", Advanced Materials, Sep. 3, 2003, pp. 1409-1413, vol. 15, No. 17.

Young, D. L. et al., "Growth and characterization of radio frequency magnetron sputter-deposited zinc stannate, Zn2SnO4, thin films", Journal of Applied Physics, Jul. 1, 2002, p. 310, vol. 92.

Orita, M. et al., "Amorphous transparent conductive oxide InGaO3(ZnO)m (m≤4): a Zn 4s conductor", Philosophical Magazine B, 2001, pp. 501-515, vol. 81, No. 5, Taylor and Francis Ltd.

Nomura, K. et al., "Thin-Film Transistor Fabricated in Single-Crystalline Transparent Oxide Semiconductor", Science, May 23, 2003, pp. 1269-1272, vol. 300, No. 5623.

"Nikkei Sentan Gijutsu (Nikkei Cutting-Edge Technology)", Sep. 9, 2002, vol. 21, Nikkei Inc.

Bellingham, J. R. et al., "Electrical and Optical Properties of Amorphous Indium Oxide", J. Phys.: Condens. Matter, 1990, pp. 6207-6221, vol. 2.

International Preliminary Report on Patentability of PCT/JP2005/003273, dated Jan. 11, 2007.

Minami, T. "New n-Type Transparent Conducting Oxides", Materials Research Society Bulletin, Aug. 2000, pp. 38-44.

Nomura, K. et al., "Electron transport in InGaO3(ZnO)m (m=integer) studied using single-crystalline thin films and transparent MISFETs", Thin Solid Films, 2003, pp. 322-326, vol. 445.

International Search Report of PCT/JP2005/003273, dated Jun. 7, 2005.

Wager, "Transparent Electronics," Science, May 23, 2003, vol. 300, pp. 1245-1246.

Ohashi et al., "Crystallinity of In2O3 (ZnO)5 films by epitaxial growth with a self-buffer-layer", Journal of Applied Physics, Sep. 1, 2002, vol. 92, No. 5, pp. 2378-2384.

Claeyssens et al., "Studies of the plume accompanying pulsed ultraviolet laser ablation of zinc oxide," Journal of Applied Physics, Dec. 1, 2002, vol. 92, No. 11, pp. 6886-6894.

Chiang, "Development of Zinc Tin Oxide-Based Transparent Thin Film Transistors," A Thesis. Submitted to Oregon State University. Aug. 7, 2003, pp. 1-104, with Abstract.

Hoffman et al. "ZnO-based transparent thin-film transistors," Applied Physics Letters, Feb. 3, 2003, vol. 82, No. 5, pp. 733-735.

Orita M. et al., "A Novel Amorphous Transparent Conductive Oxide Film InGaO3(ZnO)m", Extended Abstracts of the Japan Society of Applied Physics and Related Societies, No. 2, p. 577, 28a-ZB-1, (2000), w/English translation, cited in Opposition of European Patent No. 2 246 894, dated Sep. 11, 2014.

(56)

References Cited

OTHER PUBLICATIONS

Extract of textbook "Technology of Transparent Conductive Film", pp. 196-197, (1999), w/partial English translation, cited in Opposition of European Patent No. 2 246 894, dated Sep. 11, 2014.

Extract of textbook, "Technology of Transparent Conductive Film", Japan Society for the Promotion of Science, (1999) w/English translation of the bibliographic data, cited in Opposition of European Patent No. 2 246 894, dated Sep. 11, 2014.

Sze S. M., Extract of Textbook "Physics of Semiconductor Devices", pp. 42-47, (1969), cited in Opposition of European Patent No. 2 246 894, dated Sep. 11, 2014.

Extract of Textbook, "Technology of Transparent Conductive Film", pp. 80-89 and pp. 148-155, w/partial English translation, cited in Opposition of European Patent No. 2 246 894, dated Sep. 11, 2014.

Opposition Statement to European Patent No. 2 246 894 dated Sep. 11, 2014 (18 pages).

Opposition to European Patent 2 246 894 (10 007 790.8) submitted to the European Patent Office on Jul. 14, 2017 in related European Patent Application No. 10 007 790.8 with a Certified Priority Document, JP2002-266012 with an English translation (46 pages).

* cited by examiner

FIG.1

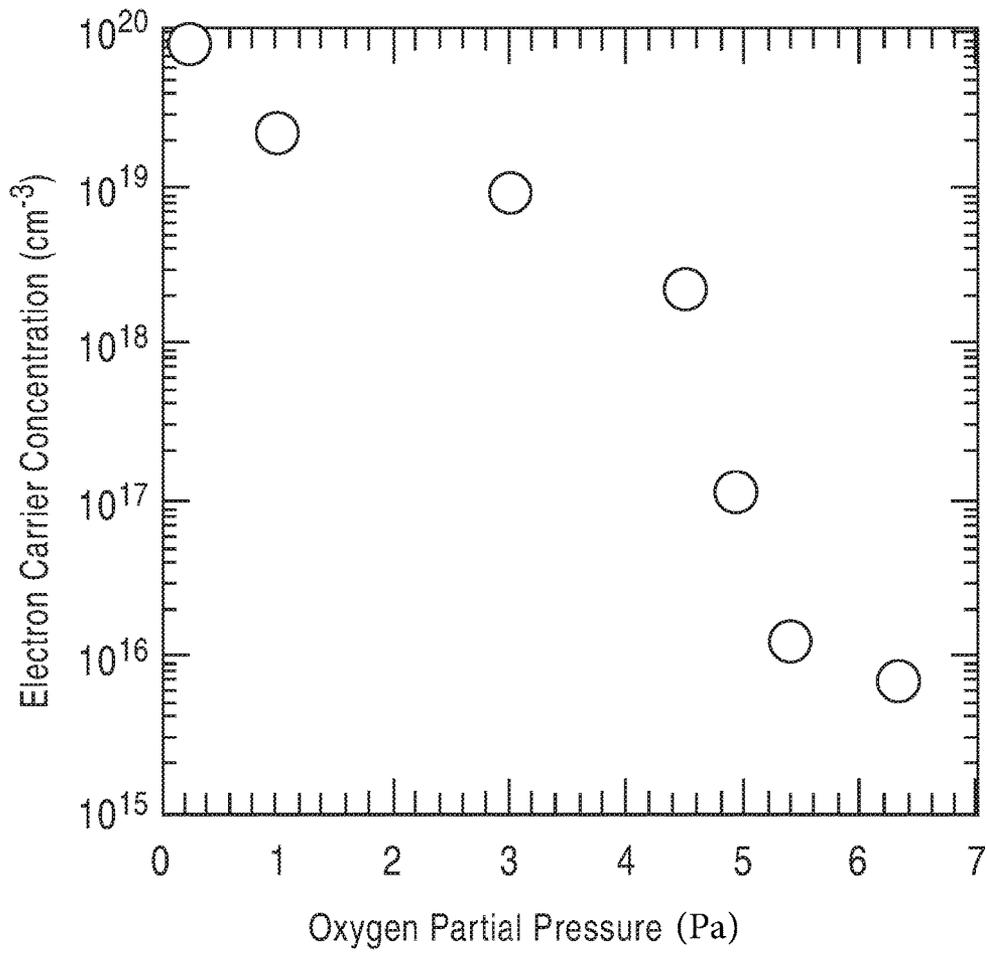


FIG.2

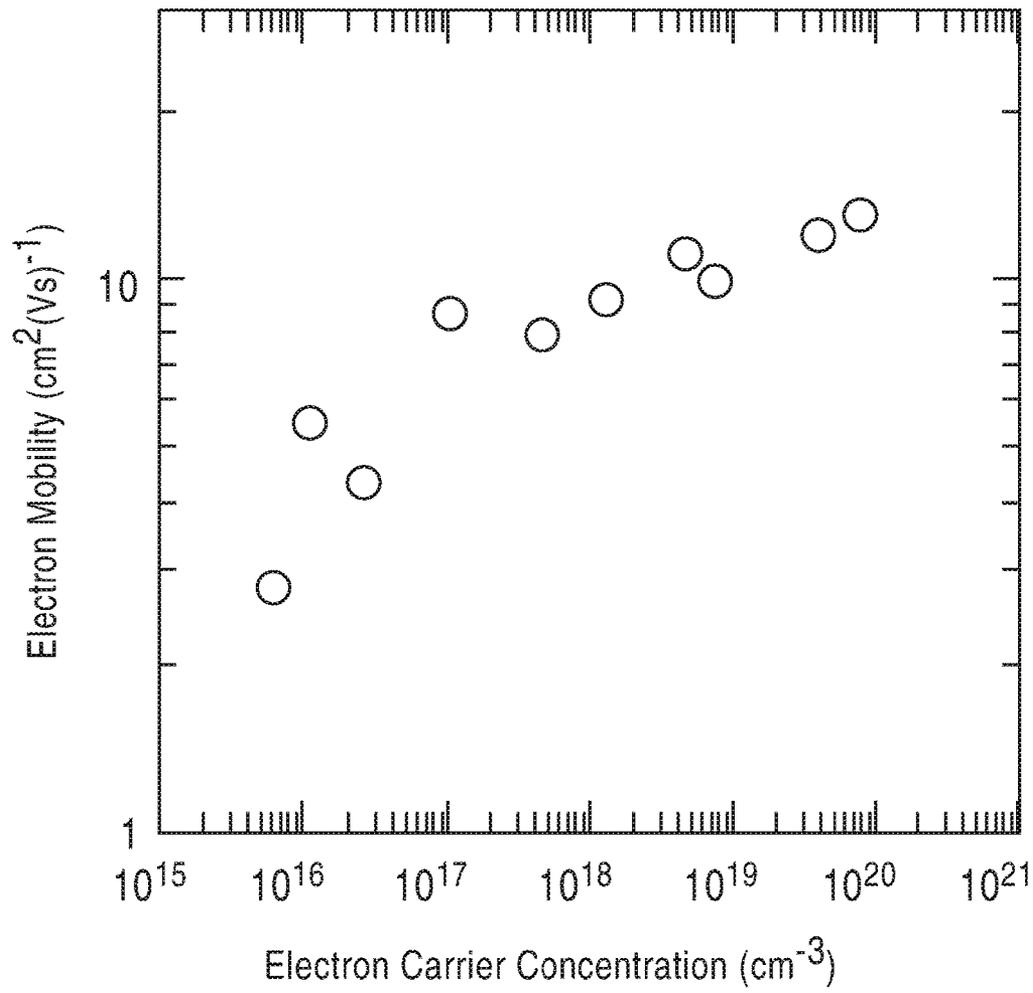


FIG. 3

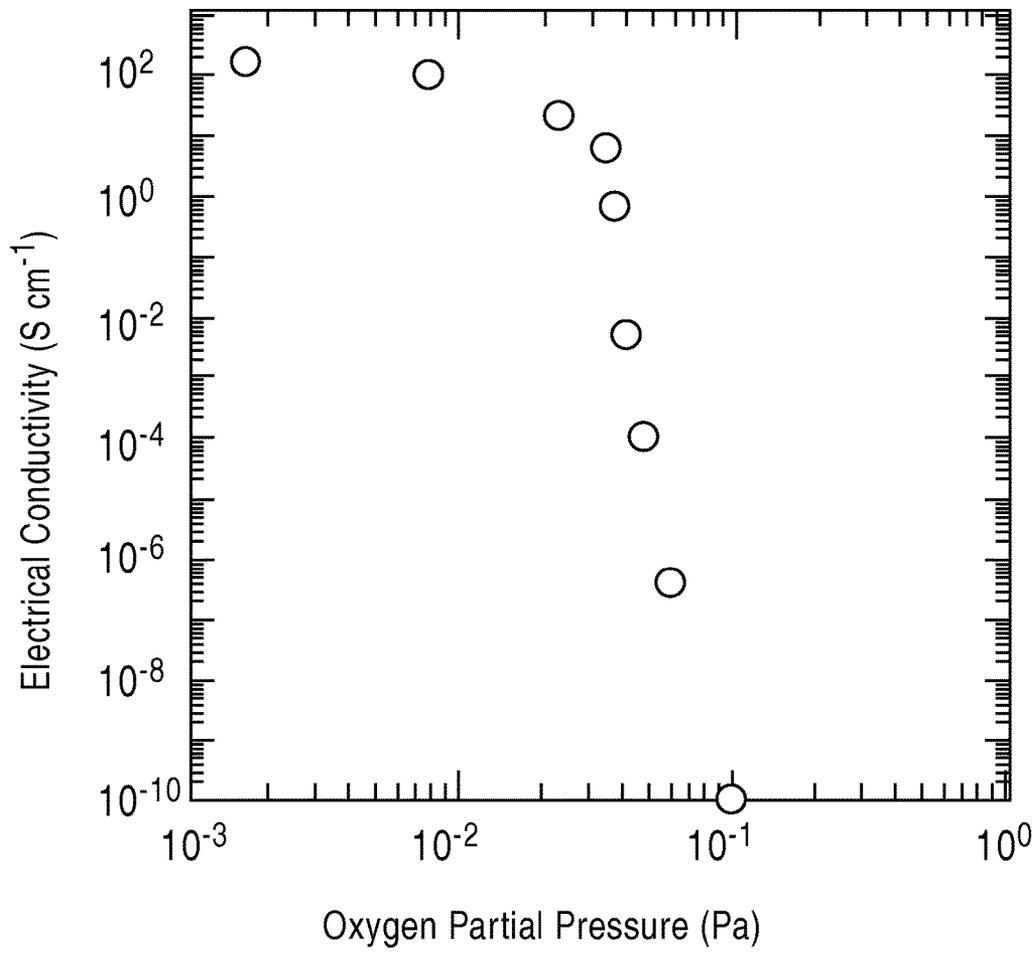


FIG.4A

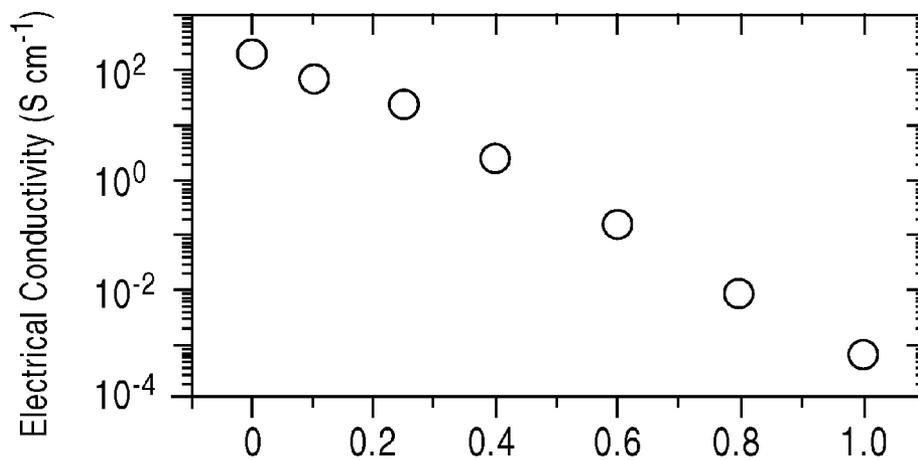


FIG.4B

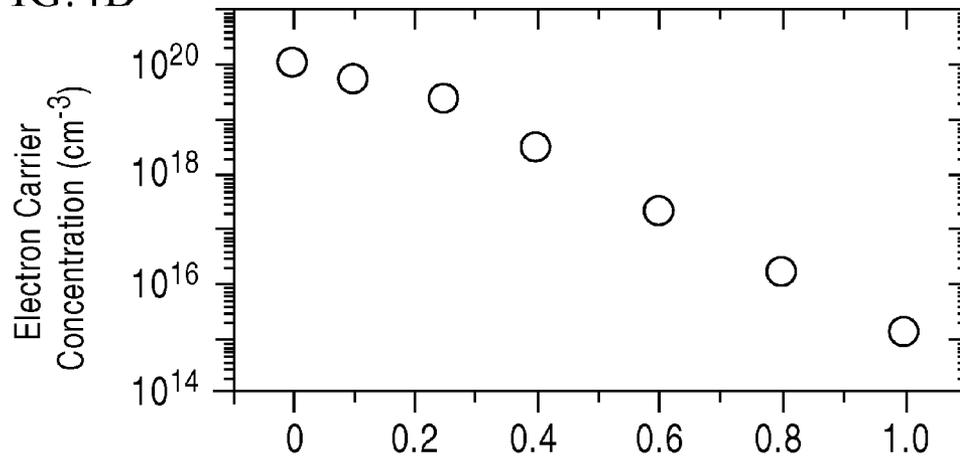


FIG.4C

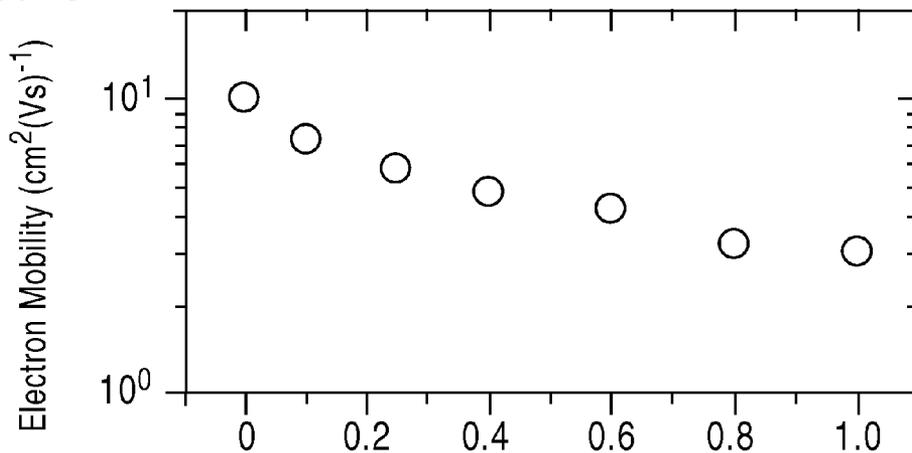


FIG. 5


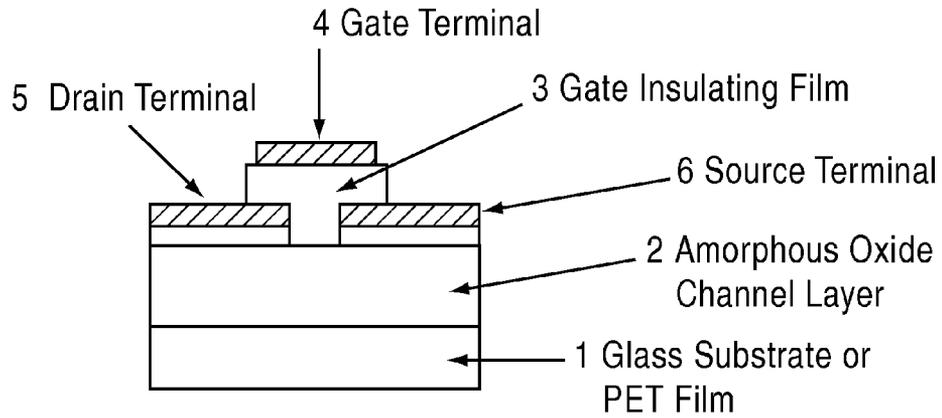


FIG. 6

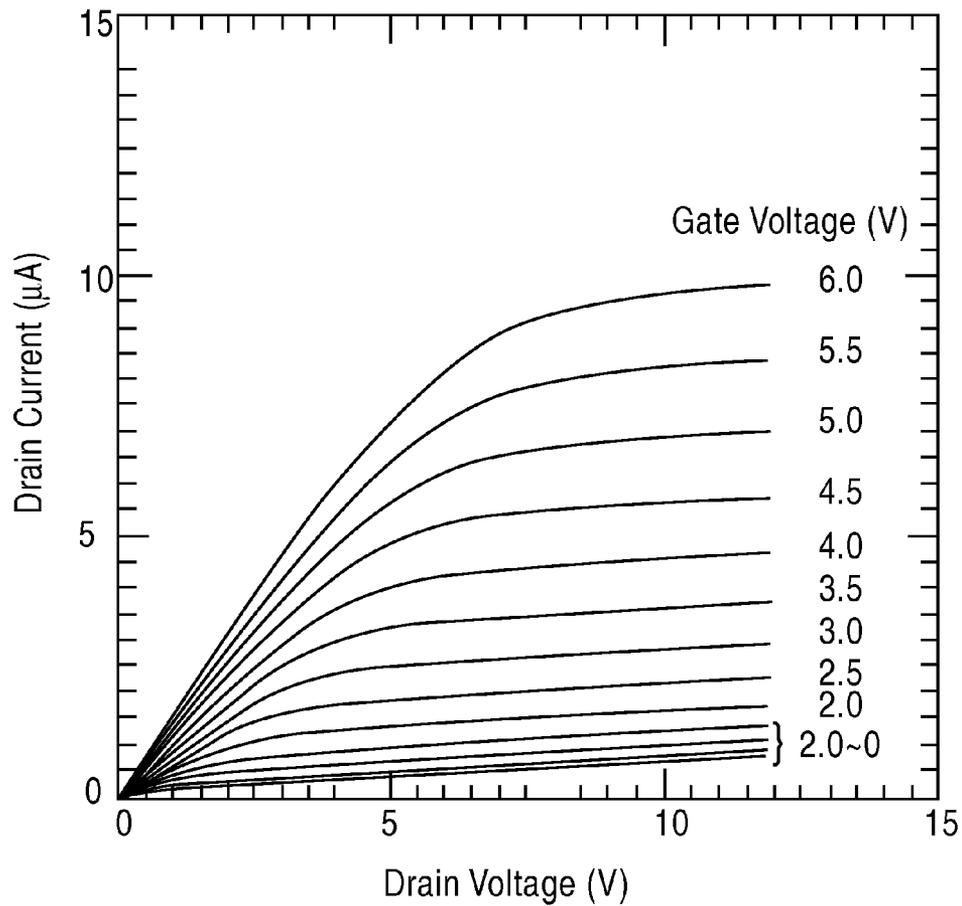

AMORPHOUS OXIDE AND THIN FILM TRANSISTOR

CROSS-REFERENCE TO RELATED APPLICATIONS

This is a continuation application of U.S. patent application Ser. No. 12/504,158, filed on Jul. 16, 2009, which is divisional of U.S. patent application Ser. No. 10/592,431, filed on Sep. 11, 2006, now abandoned, which is a 371 of International Application No. PCT/JP05/03273, filed on Feb. 28, 2005, which claims the benefit of priority from the prior Japanese Patent Application Nos. 2004-071477, filed on Mar. 12, 2004 and 2004-325938 filed on Nov. 10, 2004, the entire contents of which are incorporated herein by references.

TECHNICAL FIELD

The present invention relates to amorphous oxides and thin film transistors.

BACKGROUND ART

A thin film transistor (TFT) is a three-terminal element having a gate terminal, a source terminal, and a drain terminal. It is an active element in which a semiconductor thin film deposited on a substrate is used as a channel layer for transportation of electrons or holes and a voltage is applied to the gate terminal to control the current flowing in the channel layer and switch the current between the source terminal and the drain terminal. Currently, the most widely used TFTs are metal-insulator-semiconductor field effect transistors (MIS-FETs) in which the channel layer is composed of a polysilicon or amorphous silicon film.

Recently, development of TFTs in which ZnO-based transparent conductive oxide polycrystalline thin films are used as the channel layers has been actively pursued (Patent Document 1). These thin films can be formed at low temperatures and is transparent in visible light; thus, flexible, transparent TFTs can be formed on substrates such as plastic boards and films.

However, known ZnO rarely forms a stable amorphous phase at room temperature and mostly exhibits polycrystalline phase; therefore, the electron mobility cannot be increased because of the diffusion at the interfaces of polycrystalline grains. Moreover, ZnO tends to contain oxygen defects and a large number of carrier electrons, and it is thus difficult to decrease the electrical conductivity. Therefore, it has been difficult to increase the on/off ratio of the transistors.

Patent Document 2 discloses an amorphous oxide represented by $Zn_xM_yIn_zO_{(x+3y/2+3z/2)}$ (wherein M is at least one element selected from Al and Ga, the ratio x/y is in the range of 0.2 to 12, and the ratio z/y is in the range of 0.4 to 1.4). However, the electron carrier concentration of the amorphous oxide film obtained herein is $10^{18}/\text{cm}^3$ or more. Although this is sufficient for regular transparent electrodes, the film cannot be easily applied to a channel layer of a TFT. This is because it has been found that a TFT having a channel layer composed of this amorphous oxide film does not exhibit a sufficient on/off ratio and is thus unsuitable for TFT of a normally off type.

Patent Document 1: Japanese Unexamined Patent Application Publication No. 2003-298062

Patent Document 2: Japanese Unexamined Patent Application Publication No. 2000-044236

DISCLOSURE OF INVENTION

An object of the present invention is to provide an amorphous oxide having a low electron carrier concentration and to provide a thin film transistor having a channel layer composed of such an amorphous oxide.

The present invention provides: (1) an amorphous oxide having an electron carrier concentration less than $10^{18}/\text{cm}^3$. In the present invention, the electron carrier concentration of the amorphous oxide is preferably $10^{17}/\text{cm}^3$ or less or $10^{16}/\text{cm}^3$ or less.

The present invention also provides: (2) an amorphous oxide in which electron mobility thereof increases with the electron carrier concentration.

The present invention also provides: (3) the amorphous oxide according to item (1) or (2) above, in which the electron mobility is more than $0.1 \text{ cm}^2/(\text{V}\cdot\text{sec})$.

The present invention also provides: (4) the amorphous oxide according to item (2) or (3) above, exhibiting degenerate conduction. Note that "degenerate conduction" used herein is defined as a state in which the thermal activation energy for temperature dependency of electrical resistance is 30 meV or less.

Another aspect of the present invention provides: (5) the amorphous oxide according to any one of items (1) to (4) above, in which the amorphous oxide is a compound that contains at least one element selected from Zn, In, and Sn as a constituent and is represented by $[(\text{Sn}_{1-x}\text{M}_4)_2\text{O}_3]_a[\text{In}_{1-y}\text{M}_3]_2\text{O}_3]_b[(\text{Zn}_{1-z}\text{M}_2)_2\text{O}]_c$ (wherein $0 \leq x \leq 1$, $0 \leq y \leq 1$, $0 \leq z \leq 1$; x , y , and z are not simultaneously 1; $0 \leq a \leq 1$, $0 \leq b \leq 1$, $0 \leq c \leq 1$, and $a+b+c=1$; M4 is a group IV element (Si, Ge, or Zr) having an atomic number smaller than that of Sn; M3 is Lu or a group III element (B, Al, Ga, or Y) having an atomic number smaller than that of In; and M2 is a group II element (Mg or Ca) having an atomic number smaller than that of Zn).

In the present invention, the amorphous oxide according to (5) above may further contain at least one element selected from group V elements (V, Nb, and Ta) M5 and W.

Another aspect of the present invention provides: (6) a thin film transistor including the amorphous oxide according to any one of (1) to (4) above, in which the amorphous oxide is a single compound represented by $[(\text{In}_{1-y}\text{M}_3)_2\text{O}_3][(\text{Zn}_{1-x}\text{M}_2)_2\text{O}]_m$ (wherein $0 \leq x \leq 1$, $0 \leq y \leq 1$; x and y are not simultaneously 1; m is zero or a natural number less than 6; M3 is Lu or a group III element (B, Al, Ga, or Y) having an atomic number smaller than that of In; and M2 (Mg or Ca) is a group II element having an atomic number smaller than that of Zn) in a crystallized state or a mixture of the compounds with different values of m . M3 is, for example, Ga, and M2 is, for example Mg.

The present invention also provides the amorphous oxide according to any one of (1) to (6) above formed on a glass substrate, a metal substrate, a plastic substrate, or a plastic film. The present invention also provides a field effect transistor including a channel layer composed of the amorphous oxide described above. The field effect transistor of the present invention is characterized in that the gate insulating film is one of Al_2O_3 , Y_2O_3 , and HfO_2 or a mixed crystal compound containing at least two of these compounds.

Another aspect of the present invention provides: (7) a transparent semi-insulating amorphous oxide thin film comprising In—Ga—Zn—O, in which the composition in a crystallized state is represented by $\text{InGaO}_3(\text{ZnO})_m$ (wherein m is a number less than 6 and $0 < x \leq 1$), the electron mobility is more than $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$ and the electron carrier concentration is less than $10^{18}/\text{cm}^3$.

Furthermore, the present invention also provides: (8) a transparent semi-insulating amorphous oxide thin film comprising In—Ga—Zn—Mg—O, in which the composition in a crystallized state is represented by $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_m$ (wherein m is a number less than 6 and $0 < x \leq 1$), the electron mobility is more than $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$ and the electron carrier concentration is less than $10^{18}/\text{cm}^3$. Moreover, the present invention also provides a method for forming the transparent semi-insulating amorphous oxide thin film in which an impurity ion for increasing the electrical resistance is not intentionally added and the deposition is conducted in an atmosphere containing oxygen gas.

A thin-film transistor according to another aspect of the present invention includes a source electrode, a drain electrode, a gate electrode a gate insulating film and a channel layer, in which the channel layer contains an amorphous oxide having an electron carrier concentration of less than $10^{18}/\text{cm}^3$. Preferably, the electron carrier concentration of the amorphous oxide is $10^{17}/\text{cm}^3$ or less or $10^{16}/\text{cm}^3$ or less. The amorphous oxide is an oxide containing In, Ga, and Zn, in which the atomic ratio In:Ga:Zn is 1:1: m ($m < 6$). Alternatively, the amorphous oxide is an oxide including In, Ga, Zn, and Mg, in which the atomic ratio In:Ga:Zn: Mg_x is 1:1: m ($m < 6$), wherein $0 < x \leq 1$.

The amorphous oxide is selected from $\text{In}_x\text{Ga}_{1-x}$ oxides ($0 \leq x \leq 1$), $\text{In}_x\text{Zn}_{1-x}$ oxides ($0.2 \leq x \leq 1$), $\text{In}_x\text{Sn}_{1-x}$ oxides ($0.8 \leq x \leq 1$), and $\text{In}_x(\text{Zn}, \text{Sn})_{1-x}$ oxides ($0.15 \leq x \leq 1$).

In a thin film transistor of the present invention, a material in which the electron mobility increases with the electron carrier concentration can be used as the amorphous oxide.

According to the present invention, an amorphous oxide having a low electron carrier concentration can be provided, and a thin film transistor including a channel layer composed of such an amorphous oxide can be provided.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a graph that shows the relationship between the oxygen partial pressure during the deposition and the electron carrier concentration of an In—Ga—Zn—O amorphous oxide deposited by a pulsed laser deposition method.

FIG. 2 is a graph that shows the relationship between the electron carrier concentration and electron mobility of an In—Ga—Zn—O amorphous oxide film formed by a pulsed laser deposition method.

FIG. 3 is a graph that shows the relationship between the oxygen partial pressure during the deposition and the electrical conductivity of an In—Ga—Zn—O amorphous oxide deposited by a high-frequency sputtering method.

FIG. 4 is a graph showing changes in electron conductivity, electron carrier concentration, and electron mobility of $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_4$ deposited by pulsed laser deposition against x .

FIG. 5 is a schematic illustration showing a structure of a top gate TFT element.

FIG. 6 is a graph showing a current-voltage characteristic of a top gate TFT element.

FIG. 7 is a schematic illustration showing a pulsed layer deposition device.

FIG. 8 is a schematic illustration showing a sputter deposition device.

BEST MODE FOR CARRYING OUT THE INVENTION

An amorphous oxide of the present invention is characterized in that the electron carrier concentration is less than $10^{18}/\text{cm}^3$. A thin film transistor (TFT) of the present invention is characterized in that an amorphous oxide having an electron carrier concentration less than $10^{18}/\text{cm}^3$ is used in the channel layer.

For example, as shown in FIG. 5, the TFT is made by forming a channel layer 2 on a substrate 1 and a gate insulating film 3, a gate electrode 4, a source electrode 6, and a drain electrode 5 on the channel layer 2. In this invention, an amorphous oxide having an electron carrier concentration less than $10^{18}/\text{cm}^3$ is used in the channel layer.

The structure of the TFT to which the present invention can be applied is not limited to the staggered structure (top-gate structure) shown in FIG. 5 in which a gate insulating film and a gate terminal (electrode) are sequentially stacked on a semiconductor channel layer. For example, the TFT may have an inverted staggered structure (bottom-gate structure) in which a gate insulating film and a semiconductor channel layer are sequentially stacked on a gate terminal. The electron carrier concentration mentioned above is a value measured at room temperature. Room temperature is, for example, 25°C . and, in particular, is appropriately selected from the range of about 0°C . to about 40°C .

The electron carrier concentration of the amorphous oxide of the present invention need not be less than $10^{18}/\text{cm}^3$ all through the range of 0°C . to 40°C . For example, it is sufficient if the carrier electron concentration is less than $10^{18}/\text{cm}^3$ at 25°C . When the electron carrier concentration is reduced to $10^{17}/\text{cm}^3$ or less and more preferably to $10^{16}/\text{cm}^3$ or less, TFTs of a normally off type can be obtained in high yield. The electron carrier concentration can be determined by hall-effect measurement.

In the present invention, "amorphous oxide" is defined as an oxide that shows a halo pattern in an X-ray diffraction spectrum and exhibits no particular diffraction line. The lower limit of the electron carrier concentration of the amorphous oxide of the present invention is not particularly limited as long as the oxide can be used as the TFT channel layer. The lower limit is, for example, $10^{12}/\text{cm}^3$.

Thus, in the present invention, the starting materials, composition ratio, production conditions, and the like of the amorphous oxide are controlled as in the individual examples described below so as to adjust the electron carrier concentration to $10^{12}/\text{cm}^3$ or more but less than $10^{18}/\text{cm}^3$. Preferably, the electron carrier concentration is adjusted to $10^{13}/\text{cm}^3$ to $10^{17}/\text{cm}^3$, and more preferably $10^{15}/\text{cm}^3$ to $10^{16}/\text{cm}^3$.

The electron mobility is preferably $0.1 \text{ cm}^2/(\text{V}\cdot\text{sec})$ or more, more preferably $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$ or more, and most preferably $5 \text{ cm}^2/(\text{V}\cdot\text{sec})$ or more when measured at room temperature. The amorphous oxide exhibits increased electron mobility as the electron carrier concentration increases. The conductivity thereof tends to exhibit degenerate conduction. Degenerate conduction is defined as a state in which the thermal activation energy for temperature dependency of electrical resistance is 30 meV or less.

(Starting Materials for Amorphous Oxide)

The amorphous oxide of the present invention contains at least one element selected from Zn, In, and Sn as a constituent component and is represented by $[(\text{Sn}_{1-x}\text{M}_4)_x\text{O}_2]_a$.

5

$[(\text{In}_{1-y}\text{M}_3)_2\text{O}_3]_b[(\text{Zn}_{1-z}\text{M}_2)_c]_c$ $[0 \leq x \leq 1, 0 \leq y \leq 1, 0 \leq z \leq 1;$
 $x, y, \text{ and } z \text{ are not simultaneously } 1; 0 \leq a \leq 1, 0 \leq b \leq 1, 0 \leq c \leq 1,$
 $\text{ and } a+b+c=1; \text{ M}_4 \text{ is a group IV element (Si, Ge, or Zr)}$
 $\text{ having an atomic number smaller than that of Sn; M}_3 \text{ is Lu}$
 $\text{ or a group III element (B, Al, Ga, or Y) having an atomic}$
 $\text{ number smaller than that of In and M}_2 \text{ is a group II element}$
 $\text{ (Mg or Ca) having an atomic number smaller than that of Zn.}$
 $\text{ The amorphous oxide may further contain at least one}$
 $\text{ element selected from group V elements M}_5 \text{ (V, Nb, and Ta)}$
 $\text{ and W. In this description, the group II, III, IV, and V}$
 $\text{ elements in the periodic table are sometimes referred to as}$
 $\text{ group 2, 3, 4, and 5 elements, respectively; however, the}$
 $\text{ meaning is the same.}$

The electron carrier concentration can be further
 decreased by adding at least one element that can form a
 compound oxide, the at least one element being selected
 from a group 2 element M2 (M2: Mg or Ca) having an
 atomic number smaller than that of Zn; Lu and a group 3
 element M3 (M3: B, Al, Ga, or Y) having an atomic number
 smaller than that of In; a group 4 element M4 (M4: Si, Ge,
 or Zr) having an atomic number smaller than that of Sn; and
 a group 5 element M5 (M5: V, Nb, and Ta) or W.

The elements M2, M3, and M4 having atomic numbers
 smaller than those of Zn, In, and Sn, respectively, have
 higher ionicity than Zn, In and Sn; thus, generation of
 oxygen defects is less frequent, and the electron carrier
 concentration can be decreased. Although Lu has a larger
 atomic number than Ga, the ion radius is small and the
 ionicity is high, thereby achieving the same functions as
 those of M3. M5, which is ionized at a valency of 5, strongly
 bonds to oxygen and rarely causes oxygen defects. Tungsten
 (W), which is ionized at a valency of 6, strongly bonds to
 oxygen and rarely causes oxygen defects.

The amorphous oxide applicable to the present invention
 is a single compound having a composition in a crystallized
 state represented by $[(\text{In}_{1-y}\text{M}_3)_2\text{O}_3]_b[(\text{Zn}_{1-x}\text{M}_2)_c]_c$
 (wherein $0 \leq x \leq 1; 0 \leq y \leq 1; x$ and y are not simultaneously 1;
 m is zero or a number or a natural number less than 6; M3
 is Lu or a group 3 element (B, Al, Ga, or Y) having an atomic
 number smaller than that of In; and M2 is a group 2 element
 (Mg or Ca) having an atomic number smaller than that of
 Zn] or a mixture of compounds with different values of m .
 M3 is, for example, Ga. M2 is, for example, Mg.

The amorphous oxide applicable to the present invention
 is a unitary, binary, or ternary compound within a triangle
 with apexes of SnO_2 , In_2O_3 , and ZnO . Among these three
 compounds, In_2O_3 has high amorphous formation capacity
 and can form a completely amorphous phase when In_2O_3 is
 deposited by a vapor phase method while adding approxi-
 mately 0.1 Pa of water into the atmosphere.

ZnO and SnO_2 in some cases do not form an amorphous
 phase by themselves; however, they can form an amorphous
 phase in the presence of In_2O_3 as a host oxide. In particular,
 of binary compositions containing two of the above-de-
 scribed three compounds (compositions located on the side
 of the triangle), the In—Zn—O system can form an amor-
 phous film when In is contained in an amount of about 20 at
 % or more, and the Sn—In—O system can form an amor-
 phous film when In is contained in an amount of about 80 at
 % or more by a vapor phase method.

In order to obtain an In—Zn—O amorphous film by a
 vapor phase method, about 0.1 Pa of steam may be intro-
 duced into the atmosphere. In order to obtain an In—Sn—
 O-system amorphous film by a vapor phase method, about
 0.1 Pa of nitrogen gas may be introduced into the atmo-
 sphere. For the ternary composition, Sn—In—Zn, contain-
 ing the three compounds, an amorphous film can be obtained

6

by a vapor phase method when In is contained in an amount
 of about 15 at % in the above-described composition range.
 Note that “at %” herein indicates atomic percent with
 respect to the metal ions other than oxygen ions. In particu-
 lar, for example, “the In—Zn—O system containing about
 20 at % or more of In” is equivalent to $\text{In}_x\text{Zn}_{1-x}$ ($x > 0.2$).

The composition of the amorphous oxide film containing
 Sn, In, and/or Zn may contain additional elements as
 described below. In particular, at least one element that
 forms a compound oxide, the at least one element being
 selected from a group 2 element M2 (M2: Mg or Ca) having
 an atomic number smaller than that of Zn, Lu or a group 3
 element M3 (M3: B, Al, Ga, or Y) having an atomic number
 smaller than that of In, and a group 4 element M4 (M4: Si,
 Ge, or Zr) having an atomic number smaller than that of Sn
 may be added. The amorphous oxide film of the present
 invention may further contain at least one element that can
 form a compound oxide, the at least one element being
 selected from group 5 elements (M5: V, Nb, and Ta) and W.

Addition of the above-described elements will increase
 the stability of the amorphous film and expands the com-
 position range that can give an amorphous film. In particular,
 addition of highly covalent B, Si, or Ge is effective for
 stabilization of the amorphous phase, and a compound oxide
 composed of ions with largely different ion radii can stabi-
 lize the amorphous phase. For example, in the In—Zn—O
 system, a stable amorphous film is rarely obtained at room
 temperature unless the range of In content is more than about
 20 at %. However, by adding Mg in an equivalent amount
 to In, a stable amorphous film can be obtained at an In
 content of more than about 15 at %.

An example of the amorphous oxide material that can be
 used in the channel layer of the TFT of the present invention
 is described next. The amorphous oxide that can be used in
 the channel layer is, for example, an oxide that contains In,
 Ga, and Zn at an atomic ratio satisfying $\text{In:Ga:Zn}=1:1:m$,
 wherein m is a value less than 6. The value of m may be a
 natural number but is not necessarily a natural number. This
 applies to “ m ” referred to in other sections of this descrip-
 tion. The atomic ratio can be considered as equivalent to a
 molar ratio.

A transparent amorphous oxide thin film whose compo-
 sition in a crystallized state is represented by $\text{InGaO}_3(\text{ZnO})_m$
 (wherein m is a number less than 6) maintains a stable
 amorphous state at high temperatures not less than 800° C.
 when the value of m is less than 6. However, as the value of
 m increases, i.e., as the ratio of ZnO to InGaO_3 increases and
 the composition approaches to the ZnO composition, the
 composition tends to be more crystallizable. Thus, the value
 of m is preferably less than 6 for the channel layer of the
 amorphous TFT. A desired amorphous oxide can be obtained
 by adjusting the composition of the target material (e.g., a
 polycrystalline material) for deposition, such as sputtering
 deposition or pulsed laser deposition (PLD), to comply with
 $m < 6$.

In the amorphous oxide described above, Zn in the
 composition ratio of InGaZn may be replaced by $\text{Zn}_{1-x}\text{Mg}_x$.
 The possible amount of Mg for replacement is within the
 range of $0 < x \leq 1$. When the replacement with Mg is con-
 ducted, the electron mobility of the oxide film decreases
 compared to a film containing no Mg. However, the extent
 of decrease is small, and the electron carrier concentration
 can be decreased compared to when no replacement is
 conducted. Thus, this is more preferable for the channel
 layer of a TFT. The amount of Mg for replacement is
 preferably more than 20% and less than 85% ($0.2 < x < 0.85$
 in term of x) and more preferably $0.5 < x < 0.85$.

The amorphous oxide may be appropriately selected from In oxides, $\text{In}_x\text{Zn}_{1-x}$ oxides ($0.2 \leq x \leq 1$), $\text{In}_x\text{Sn}_{1-x}$ oxides ($0.8 \leq x \leq 1$), and $\text{In}_x(\text{Zn}, \text{Sn})_{1-x}$ oxides ($0.15 \leq x \leq 1$). The ratio of Zn to Sn in the $\text{In}_x(\text{Zn}, \text{Sn})_{1-x}$ oxides may be appropriately selected. Namely, an $\text{In}_x(\text{Zn}, \text{Sn})_{1-x}$ oxide can be described as $\text{In}_x(\text{Zn}_y\text{Sn}_{1-y})_{1-x}$ oxide, and y is in the range of 1 to 0. For an In oxide containing neither Zn nor Sn, In may be partly replaced by Ga. In this case, the oxide can be described as an $\text{In}_x\text{Ga}_{1-x}$ oxide ($0 \leq x \leq 1$).

(Method for Producing Amorphous Oxide)

The amorphous oxide used in the present invention can be prepared by a vapor phase deposition technique under the conditions indicated in the individual examples below. For example, in order to obtain an InGaZn amorphous oxide, deposition is conducted by a vapor phase method such as a sputtering (SP) method, a pulsed laser deposition (PLD) method, or an electron beam deposition method while using a polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_m$ as the target. From the standpoint of mass productivity, the sputtering method is most suitable.

During the formation of an In_2O_3 or In—Zn—O amorphous oxide film or the like, oxygen radicals may be added to the atmosphere. Oxygen radicals may be added through an oxygen radical generator. When there is need to increase the electron carrier concentration after the film formation, the film is heated in a reducing atmosphere to increase the electron carrier concentration. The resulting amorphous oxide film with a different electron carrier concentration was analyzed to determine the dependency of the electron mobility on the electron carrier concentration, and the electron mobility increased with the electron carrier concentration.

(Substrate)

The substrate for forming the TFT of the present invention may be a glass substrate, a plastic substrate, a plastic film, or the like. Moreover, as described below in EXAMPLES, the amorphous oxide of the present invention can be formed into a film at room temperature. Thus, a TFT can be formed on a flexible material such as a PET film. Moreover, the above-mentioned amorphous oxide may be appropriately selected to prepare a TFT from a material that is transparent in visible light not less than 400 nm or infrared light.

(Gate Insulating Film)

The gate insulating film of the TFT of the present invention is preferably a gate insulating film composed of Al_2O_3 , Y_2O_3 , HfO_2 , or a mixed crystal compound containing at least two of these compounds. When there is a defect at the interface between the gate insulating thin film and the channel layer thin film, the electron mobility decreases and hysteresis occurs in the transistor characteristics. Moreover, leak current greatly differs according to the type of the gate insulating film. Therefore, a gate insulating film suitable for the channel layer must be selected.

Use of an Al_2O_3 film can decrease the leak current. Use of an Y_2O_3 film can reduce the hysteresis. Use of a high dielectric constant HfO_2 film can increase the field effect mobility. By using a film composed of a mixed crystal of these compounds, a TFT having small leak current and hysteresis and large field effect mobility can be produced. the process for forming the gate insulating film and the process for forming the channel layer can be conducted at room temperature; thus, a TFT of a staggered or inverted staggered structure can be formed.

(Transistor)

When a field effect transistor includes a channel layer composed of an amorphous oxide film having an electron carrier concentration of less than $10^{18}/\text{cm}^3$, a source terminal, a drain terminal, and a gate terminal disposed on the

gate insulating film, the current between the source and drain terminals can be adjusted to about 10^{-7} A when a voltage of about 5V is applied between the source and drain terminals without application of a gate voltage. The theoretical lower limit of the electron carrier concentration is $10^5/\text{cm}^3$ or less assuming that the electrons in the valence band are thermally excited. The actual possibility is that the lower limit is about $10^{12}/\text{cm}^3$.

When Al_2O_3 , Y_2O_3 , or HfO_2 alone or a mixed crystal compound containing at least two of these compounds is used in the gate insulating layer, the leak voltage between the source gate terminals and the leak voltage between the drain and gate terminals can be adjusted to about 10^{-7} A, and a normally off transistor can be realized.

The electron mobility of the oxide crystals increases as the overlap of the s orbits of the metal ion increases. The oxide crystals of Zn, In, and Sn having large atomic numbers exhibit high electron mobility of 0.1 to $200 \text{ cm}^2/(\text{V}\cdot\text{sec})$. Since ionic bonds are formed between oxygen and metal ions in an oxide, electron mobility substantially comparable to that in a crystallized state can be exhibited in an amorphous state in which there is no directionality of chemical bonding, the structure is random, and the directions of the bonding are nonuniform. In contrast, by replacing Zn, In, and Sn each with an element having a smaller atomic number, the electron mobility can be decreased. Thus, by using the amorphous oxide described above, the electron mobility can be controlled within the range of about $0.01 \text{ cm}^2/(\text{V}\cdot\text{sec})$ to $20 \text{ cm}^2/(\text{V}\cdot\text{sec})$.

In a typical compound, the electron mobility decreases as the carrier concentration increases due to the dispersion between the carriers. In contrast, the amorphous oxide of the present invention exhibits increased electron mobility with the increasing electron carrier concentration. The physical principle that lies behind this phenomenon is not clearly identified.

Once a voltage is applied to the gate terminal, electrons are injected into the amorphous oxide channel layer, and current flows between the source and drain terminals, thereby allowing the part between the source and drain terminals to enter an ON state. According to the amorphous oxide film of the present invention, since the electron mobility increases with the electron carrier concentration, the current that flows when the transistor is turned ON can be further increased. In other words, the saturation current and the on/off ratio can be further increased. When the amorphous oxide film having high electron mobility is used as the channel layer of a TFT, the saturation current can be increased and the switching rate of the TFT can be increased, thereby achieving high-speed operation.

For example, when the electron mobility is about $0.01 \text{ cm}^2/(\text{V}\cdot\text{sec})$, the material can be used in a channel layer of a TFT for driving a liquid crystal display element. By using an amorphous oxide film having an electron mobility of about $0.1 \text{ cm}^2/(\text{V}\cdot\text{sec})$, a TFT that has performance comparable or superior to the TFT using an amorphous silicon film and that can drive a display element for moving images can be produced.

In order to realize a TFT that requires large current, e.g., for driving a current-driven organic light-emitting diode, the electron mobility is preferably more than $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$. Note that when the amorphous oxide of the present invention that exhibits degenerate conduction is used in the channel layer, the current that flows at a high carrier concentration, i.e., the saturation current of the transistor, shows decreased dependency on temperature, and a TFT with superior temperature characteristics can be realized.

Example 1: Preparation of Amorphous
In—Ga—Zn—O Thin Film by PLD Method

A film was formed in a PLD device shown in FIG. 7. In the drawing, reference numeral **701** denotes a rotary pump (RP), **702** denotes a turbo molecular pump (TMP), **703** denotes a preparation chamber, **704** denotes an electron gun for RHEED, **705** denotes a substrate holder for rotating and vertically moving the substrate, **706** denotes a laser entrance window, **707** denotes a substrate, **708** denotes a target, **709** denotes a radical source, **710** denotes a gas inlet, **711** denotes a target holder for rotating and vertically moving the target, **712** denotes a by-pass line, **713** denotes a main line, **714** denotes a turbo molecular pump (TMP), **715** denotes a rotary pump (RP), **716** denotes a titanium getter pump, and **717** denotes a shutter. In the drawing, **718** denotes ionization gauge (IG), **719** denotes a Pirani gauge (PG), **720** denotes a Baratron gauge (BG), and **721** denotes a deposition chamber.

An In—Ga—Zn—O amorphous oxide semiconductor thin film was formed on a SiO₂ glass substrate (#1737 produced by Corning) by a pulsed laser deposition method using a KrF excimer laser. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100° C.

An InGaO₃(ZnO)₄ sinter target (size: 20 mm in dia., 5 mm in thickness) was used as the polycrystalline target. This target was prepared by wet-mixing the starting materials, In₂O₃:Ga₂O₃:ZnO (each being a 4N reagent), in a solvent (ethanol), calcining (1000° C., 2 h) the resulting mixture, dry-milling the calcined mixture, and sintering the resulting mixture (1550° C., 2 h). The electrical conductivity of the target obtained was 90 (S/cm).

The ultimate vacuum of the deposition chamber was adjusted to 2×10⁻⁶ (Pa), and the oxygen partial pressure during the deposition was controlled to 6.5 (Pa) to form a film. The oxygen partial pressure inside the chamber **721** was 6.5 Pa, and the substrate temperature was 25° C. The distance between the target **708** and the substrate **707** for deposition was 30 (mm). The power of the KrF excimer laser entering from the entrance window **706** was in the range of 1.5 to 3 (mJ/cm²/pulse). The pulse width was 20 (nsec), the repetition frequency was 10 (Hz), and the beam spot diameter was 1×1 (mm square). A film was formed at a deposition rate of 7 (nm/min).

The resulting thin film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°), but no clear diffraction peak was observed. Thus, the In—Ga—Zn—O thin film obtained was assumed to be amorphous. The X-ray reflectance was determined, and the pattern was analyzed. It was observed that the root mean square roughness (Rrms) of the thin film was about 0.5 nm, and the film thickness was about 120 nm. The results of the fluorescence X-ray showed that the metal composition ratio of the thin film was In:Ga:Zn=0.98:1.02:4. The electrical conductivity was less than about 10⁻² S/cm. The electron carrier concentration and the electron mobility were presumably about 10¹⁶/cm³ or less and about 5 cm²/(V·sec), respectively.

Based on the analysis of the optical absorption spectrum, the energy width of the forbidden band of the amorphous thin film prepared was determined to be about 3 eV. Based on these values, it was found that the In—Ga—Zn—O thin film had an amorphous phase close to the composition of the

crystals of InGaO₃(ZnO)₄, had fewer oxygen defects, and was a flat, transparent thin film with low electrical conductivity.

Specific description is now presented with reference to FIG. 1. FIG. 1 shows a change in electron carrier concentration of the oxide formed into a film against changes in oxygen partial pressure when an In—Ga—Zn—O transparent amorphous oxide thin film represented by InGaO₃(ZnO)₄ in an assumed crystal state is formed under the same conditions as in this EXAMPLE.

As shown in FIG. 1, the electron carrier concentration decreased to less than 10¹⁸/cm³ when the film was formed in an atmosphere at a high oxygen partial pressure of more than 4.5 Pa under the same conditions as this example. In this case, the temperature of the substrate was maintained substantially at room temperature without intentional heating. The substrate temperature is preferably less than 100° C. when a flexible plastic film is used as the substrate.

By further increasing the oxygen partial pressure, the electron carrier concentration was further decreased. For example, as shown in FIG. 1, the number of the electron carriers of the InGaO₃(ZnO)₄ thin film deposited at a substrate temperature of 25° C. and an oxygen partial pressure of 5 Pa decreased to 10¹⁶/cm³.

The thin film obtained had an electron mobility exceeding 1 cm²/(V·sec), as shown in FIG. 2. However, according to the pulsed laser deposition method of the present invention, the surface of the film deposited will have irregularities at an oxygen partial pressure of 6.5 Pa or more, and thus, it is difficult to use the thin film as a channel layer of a TFT. Therefore, by using an In—Ga—Zn—O transparent amorphous oxide thin film having a composition of InGaO₃(ZnO)_m (m is less than 6) in a crystal state prepared by a pulsed laser deposition method in an atmosphere having an oxygen partial pressure exceeding 4.5 Pa, preferably exceeding 5 Pa, but less than 6.5 Pa, a normally off transistor can be prepared.

The electron mobility of this thin film was more than 1 cm²/(V·sec), and the on/off ratio thereof was increased to over 10³. As is described above, in forming an InGaZn oxide film by a PLD method under the conditions set forth in this example, the oxygen partial pressure is preferably controlled to not less than 4.5 Pa but less than 6.5 Pa. Whether an electron carrier concentration of 10¹⁸/cm³ is realized depends on the conditions of the oxygen partial pressure, the configuration of the deposition device, the materials for deposition, the composition, and the like.

Next, in the above-described device at an oxygen partial pressure of 6.5 Pa, an amorphous oxide was made and a top-gate MISFET element shown in FIG. 5 was formed. In particular, a semi-insulating amorphous InGaO₃(ZnO)₄ film having a thickness of 120 nm for use as a channel layer (**2**) was formed on a glass substrate (**1**) by the above-described method for making the amorphous In-Ga-Zn-O thin film.

On this film, InGaO₃(ZnO)₄ having a high electrical conductivity and a gold film each 30 nm in thickness were deposited by a pulsed laser deposition method while controlling the oxygen partial pressure inside the chamber to less than 1 Pa. A drain terminal (**5**) and a source terminal (**6**) were formed by a photolithographic method and a lift-off method.

Lastly, an Y₂O₃ film (thickness: 90 nm, relative dielectric constant: about 15, leak current density: 10⁻³ A/cm² upon application of 0.5 MV/cm) for use as a gate insulating film (**3**) was deposited by an electron beam deposition method,

and gold was deposited on the Y_2O_3 film. A gate terminal (4) was formed by a photolithographic method and a lift-off method.

(Evaluation of characteristics of MISFET element)

FIG. 6 shows the current-voltage characteristics of MISFET elements measured at room temperature. Since the drain current I_{DS} increased with the drain voltage V_{DS} , the channel was proved to be an n-type semiconductor. This is consistent with the fact that the amorphous In-Ga-Zn-O semiconductor is of an n-type. I_{DS} was saturated (pinch-off) at V_{DS} about 6 V, which was a typical behavior for semiconductor transistors. The gain characteristic was determined, and the threshold value of the gate voltage V_{GS} when $V_{DS}=4$ V was applied was about -0.5 V. Upon application of $V_G=10$ V, current of $I_{DS}=1.0 \times 10^{-5}$ A flowed. This is because carriers were induced in the In—Ga—Zn—O amorphous semiconductor thin film, i.e., an insulator, due to the gate bias. The on/off ratio of the transistor exceeded 10^3 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $7 \text{ cm}^2/(\text{Vs})^{-1}$ was obtained in the saturation region.

The same measurements were carried out on the element while irradiating the element with visible light, but no change in transistor characteristics was observed. According to the present example, a thin film transistor having a channel layer exhibiting a low electron carrier concentration, a high electrical resistance, and high electron mobility can be realized. Note that the above-described amorphous oxide showed excellent characteristics in that the electron mobility increased with the electron carrier concentration and that degenerate conduction was exhibited.

In this example, the thin film transistor was formed on the glass substrate. Since the film can be formed at room temperature, a substrate such as a plastic board or a film can be used. The amorphous oxide obtained in this example absorbs little visible light thus, a transparent, flexible TFT can be made.

Example 2: Formation of Amorphous $\text{InGaO}_3(\text{ZnO})$ and $\text{InGaO}_3(\text{ZnO})_4$ Oxide Films by PLD Method

In—Zn—Ga—O amorphous oxide films were deposited on glass substrates (#1737 produced by Corning) by using polycrystalline sinters represented by $\text{InGaO}_3(\text{ZnO})$ and $\text{InGaO}_3(\text{ZnO})_4$ as the targets by a PLD method using KrF excimer laser. The same PLD deposition device as shown in EXAMPLE 1 was used, and the deposition was conducted under the same conditions. The substrate temperature during the deposition was 25°C .

Each film obtained thereby was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°) for the film surface. No clear diffraction peak was detected. The In—Zn—Ga—O films prepared from the two targets were both amorphous.

The In—Zn—Ga—O amorphous oxide films on the glass substrates were each analyzed to determine the x-ray reflectance. Analysis of the pattern found that the root mean average roughness (Rrms) of the thin film was about 0.5 nm and that the thickness was about 120 nm. Fluorescence x-ray analysis (XRF) showed that the ratio of the metal atoms of the film obtained from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})$ was In:Ga:Zn=1.1:1.1:0.9 and that the ratio of the metal atoms of the film obtained from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_4$ was In:Ga:Zn=0.98:1.02:4.

The electron carrier concentration of the amorphous oxide film obtained from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_4$ was measured while changing the oxygen partial pressure of the atmosphere during the deposition. The results are shown in FIG. 1. By forming the film in the atmosphere having an oxygen partial pressure exceeding 4.5 Pa, the electron carrier concentration could be decreased to less than $10^{18}/\text{cm}^3$. In this case, the temperature of the substrate was maintained substantially at room temperature without intentional heating. When the oxygen partial pressure was less than 6.5 Pa, the surface of the amorphous oxide film obtained was flat.

When the oxygen partial pressure was 5 Pa, the electron carrier concentration and the electrical conductivity of the amorphous oxide film obtained from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_4$ were $10^{16}/\text{cm}^3$ and 10^{-2} S/cm, respectively. The electron mobility was presumably about $5 \text{ cm}^2/(\text{V}\cdot\text{sec})$. Based on the analysis of the optical absorption spectrum, the energy width of the forbidden band of the amorphous thin film prepared was determined to be about 3 eV. The electron carrier concentration could be further decreased as the oxygen partial pressure was increased from 5 Pa.

As shown in FIG. 1, the In—Zn—Ga—O amorphous oxide film deposited at a substrate temperature of 25°C . and an oxygen partial pressure of 6 Pa exhibited a decreased electron carrier concentration of $8 \times 10^{15}/\text{cm}^3$ (electrical conductivity: about 8×10^{-3} S/cm). The resulting film was assumed to have an electron mobility of more than $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$. However, according to the PLD method, irregularities were formed in the surface of the film deposited at an oxygen partial pressure of 6.5 Pa or more, and thus it was difficult to use the film as the channel layer of the TFT.

The relationship between the electron carrier concentration and the electron mobility of the In—Zn—Ga—O amorphous oxide film prepared from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_4$ at different oxygen partial pressures was investigated. The results are shown in FIG. 2. When the electron carrier concentration increased from $10^{16}/\text{cm}^3$ to $10^{20}/\text{cm}^3$, the electron mobility increased from about $3 \text{ cm}^2/(\text{V}\cdot\text{sec})$ to about $11 \text{ cm}^2/(\text{V}\cdot\text{sec})$. The same tendency was observed for the amorphous oxide film prepared from the target composed of the polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})$.

An In—Zn—Ga—O amorphous oxide film formed on a polyethylene terephthalate (PET) film having a thickness of 200 μm instead of the glass substrate also showed similar characteristics.

Example 3: Formation of In—Zn—Ga—O Amorphous Oxide Film by SP Method

Formation of a film by a high-frequency SP method using argon gas as the atmosphere gas is described. The SP method was conducted using the device shown in FIG. 8. In the drawing, reference numeral **807** denotes a substrate for deposition, **808** denotes a target, **805** denotes a substrate holder equipped with a cooling mechanism, **814** denotes a turbo molecular pump, **815** denotes a rotary pump, **817** denotes a shutter, **818** denotes an ionization gauge, **819** denotes a Pirani gauge, **821** denotes a deposition chamber, and **830** denotes a gate valve. A SiO_2 glass substrate (#1737 produced by Corning) was used as the substrate **807** for deposition. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100°C .

An $\text{InGaO}_3(\text{ZnO})_4$ polycrystalline sinter (size: 20 mm in dia., 5 mm in thickness) was used as the target material. The sinter was prepared by wet-mixing the starting materials, In_2O_3 : Ga_2O_3 : ZnO (each being a 4N reagent), in a solvent (ethanol), calcining (1000° C., 2 h) the resulting mixture, dry-milling the calcined mixture, and sintering the resulting mixture (1550° C., 2 h). The target **808** had an electrical conductivity of 90 (S/cm) and was in a semi-insulating state.

The ultimate vacuum inside the deposition chamber **821** was 1×10^{-4} (Pa). The total pressure of the oxygen gas and the argon gas during the deposition was controlled at a predetermined value within the range of 4 to 0.1×10^{-1} (Pa), and the oxygen partial pressure was changed in the range of 10^{-3} to 2×10^{-1} (Pa) by changing the partial pressure ratio of the argon gas and oxygen. The substrate temperature was room temperature, and the distance between the target **808** and the substrate **807** for deposition was 30 (mm). The current injected was RF 180 W, and the deposition rate was 10 (nm/min).

The resulting film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle=0.5°) for the film surface, but no clear diffraction peak was observed. Thus, the In—Zn—Ga—O thin film obtained was proved to be amorphous. The X-ray reflectance was determined, and the pattern was analyzed. It was observed that the root mean square roughness (Rrms) of the thin film was about 0.5 nm, and the film thickness was about 120 nm. The results of the fluorescence X-ray showed that the metal composition ratio of the thin film was In:Ga:Zn=0.98:1.02:4.

The electrical conductivity of the amorphous oxide film obtained by changing the oxygen partial pressure in the atmosphere during the deposition was measured. The results are shown in FIG. 3. As shown in FIG. 3, the electrical conductivity could be decreased to less than 10 S/cm by forming the film in an atmosphere at a high oxygen partial pressure exceeding 3×10^{-2} Pa.

By further increasing the oxygen partial pressure, the number of electron carriers could be decreased. For example, as shown in FIG. 3, the electrical conductivity of an $\text{InGaO}_3(\text{ZnO})_4$ thin film deposited at a substrate temperature of 25° C. and an oxygen partial pressure of 10^{-1} Pa was decreased to about 10^{-10} S/cm. An $\text{InGaO}_3(\text{ZnO})_4$ thin film deposited at an oxygen partial pressure exceeding 10^{-1} Pa had excessively high electrical resistance and thus the electrical conductivity thereof could not be measured. However, extrapolation was conducted for the value observed from a film having a high electron carrier concentration, and the electron mobility was assumed to be about $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$.

In short, a normally off transistor having an on/off ratio exceeding 10^3 could be made by using a transparent amorphous oxide thin film which was composed of In—Ga—Zn—O prepared by a sputter deposition method in argon gas atmosphere at an oxygen partial pressure more than 3×10^{-2} Pa, preferably more than 5×10^{-1} Pa, and which was represented by $\text{InGaO}_3(\text{ZnO})_4$ (m is a natural number less than 6) in a crystallized state.

When the device and starting materials set forth in this example are used, the oxygen partial pressure during the sputter deposition is, for example, in the range of 3×10^{-2} Pa to 5×10^{-1} Pa. The electron mobility of the thin films prepared by the pulsed laser deposition method and the sputtering method increases with the number of the conduction electrons, as shown in FIG. 2.

As described above, by controlling the oxygen partial pressure, oxygen defects can be reduced, and therefore the electron carrier concentration can be reduced. Unlike in the polycrystalline state, in the amorphous state, there is essen-

tially no grain interface; therefore, an amorphous thin film with high electron mobility can be obtained. Note that when a polyethylene terephthalate (PET) film having a thickness of 200 μm was used instead of the glass substrate, the resulting $\text{InGaO}_3(\text{ZnO})_4$ amorphous oxide thin film exhibited similar characteristics.

Example 4: Formation of In—Zn—Ga—Mg—O Amorphous Oxide Film by PLD Method

Formation of an $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_4$ film ($0 < x < 1$) on a glass substrate by a PLD method is described. The same deposition device shown in FIG. 7 was used as the deposition device. A SiO_2 glass substrate (#1737 produced by Corning) was prepared as the substrate for deposition. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100° C.

An $\text{InGa}(\text{Zn}_{1-x}\text{Mg}_x\text{O})_4$ ($0 < x < 1$) sinter (size: 20 mm in dia., 5 mm in thickness) was used as the target. The target was prepared by wet-mixing the starting materials, In_2O_3 : Ga_2O_3 : ZnO : MgO (each being a 4N reagent), in a solvent (ethanol), calcining (1000° C., 2 h) the resulting mixture, dry-milling the calcined mixture, and sintering the resulting mixture (1550° C., 2 h).

The ultimate vacuum inside the deposition chamber was 2×10^{-6} (Pa), and the oxygen partial pressure during the deposition was 0.8 (Pa). The substrate temperature was room temperature (25° C.), and the distance between the target and the substrate for deposition was 30 (mm). The power of the KrF excimer laser was 1.5 (mJ/cm²/pulse), the pulse width was 20 (nsec), the repetition frequency was 10 (Hz), and the beam spot diameter was 1×1 (mm square). The deposition rate was 7 (nm/min).

The resulting film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°) for the film surface, but no clear diffraction peak was observed. Thus, the In—Zn—Ga—Mg—O thin film obtained was proved to be amorphous. The surface of the resulting film was flat.

The dependency on the value x of the electrical conductivity, electron carrier concentration, and electron mobility of In—Zn—Ga—Mg—O amorphous oxide films deposited in atmosphere at an oxygen partial pressure of 0.8 Pa was investigated by using targets of different x values. Note that a high-resistance amorphous $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_m$ film could be obtained at an oxygen partial pressure of less than 1 Pa as long as the polycrystalline $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_m$ (m is a natural number less than 6; $0 < x \leq 1$) was used as the target.

The results are shown in FIG. 4. The results showed that the electron carrier concentration of an amorphous oxide film deposited by a PLD method in an atmosphere at an oxygen partial pressure of 0.8 Pa could be reduced to less than $10^{18}/\text{cm}^3$ when the value x was more than 0.4. The electron mobility of the amorphous oxide film with x exceeding 0.4 was more than $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$. As shown in FIG. 4, when a target in which Zn was substituted with 80 at % Mg was used, the electron carrier concentration of the film obtained by the pulsed laser deposition method in an atmosphere at an oxygen partial pressure of 0.8 Pa could be reduced to less than $10^{16}/\text{cm}^3$.

Although the electron mobility of these films is low compared to that of Mg-free films, the degree of decrease is small, while the electron mobility at room temperature is about $5 \text{ cm}^2/(\text{V}\cdot\text{sec})$, i.e., higher than that of amorphous silicon by one order of magnitude. When deposition is

15

conducted under the same conditions, the electrical conductivity and the electron mobility both decrease with an increase in Mg content. Thus, the Mg content is preferably more than 20 at % but less than 85 at % ($0.2 < x < 0.85$ in terms of x), and more preferably $0.5 < x < 0.85$.

An $\text{InGaO}_3(\text{Zn}_{1-x}\text{Mg}_x\text{O})_4$ ($0 < x < 1$) amorphous oxide film formed on a polyethylene terephthalate (PET) film having a thickness of 200 μm instead of the glass substrate also showed similar characteristics.

Example 5: Formation of In_2O_3 Amorphous Oxide Film by PLD

Formation of an indium oxide film is now described. The deposition device shown in FIG. 7 was used as the deposition device. A SiO_2 glass substrate (#1737 produced by Corning) was prepared as the substrate for deposition. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100° C.

An In_2O_3 sinter (size: 20 mm in dia., 5 mm in thickness) was used as the target. The target was prepared by calcining the starting material In_2O_3 (a 4N reagent) (1000° C., 2 h), dry milling the calcined material, and sintering the resulting material (1550° C., 2 h).

The ultimate vacuum inside the deposition chamber was 2×10^{-6} (Pa), and the oxygen partial pressure during the deposition was 5 (Pa). The steam partial pressure was 0.1 (Pa), and 200 W was applied to the oxygen radical generator to produce oxygen radicals. The substrate temperature was room temperature. The distance between the target and the substrate for deposition was 40 (mm). The power of the KrF excimer laser was 0.5 (mJ/cm²/pulse), the pulse width was 20 (nsec), the repetition frequency was 10 (Hz), and the beam spot diameter was 1×1 (mm square). The deposition rate was 3 (nm/min).

The resulting film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°) for the film surface, but no clear diffraction peak was observed. Thus, the In—O thin film obtained was proved to be amorphous. The film thickness was 80 nm. The electron carrier concentration and the electron mobility of the In—O amorphous oxide film obtained were $5 \times 10^{17}/\text{cm}^3$ and about 7 cm²/(V·sec), respectively.

Example 6: Formation of In—Sn—O Amorphous Oxide Film by PLD

Deposition of an In—Sn—O amorphous oxide film having a thickness of 200 μm by a PLD method is described. A SiO_2 glass substrate (#1737 produced by Corning) was prepared as the substrate for deposition. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100° C.

An $\text{In}_2\text{O}_3\text{—SnO}_2$ sinter (size: 20 mm in dia., 5 mm in thickness) was prepared as the target by wet-mixing the starting materials, $\text{In}_2\text{O}_3\text{—SnO}_2$ (a 4N reagent), in a solvent (ethanol), calcining the resulting mixture (1000° C., 2 h), dry milling the calcined mixture, and sintering the resulting mixture (1550° C., 2 h). The composition of the target was $(\text{In}_{0.9}\text{Sn}_{0.1})_2\text{O}_{3.1}$ polycrystal.

The ultimate vacuum inside the deposition chamber was 2×10^{-6} (Pa), the oxygen partial pressure during the deposition was 5 (Pa), and the nitrogen partial pressure was 0.1 (Pa). Then 200 W is applied to the oxygen radical generator to produce oxygen radicals. The substrate temperature dur-

16

ing the deposition was room temperature. The distance between the target and the substrate for deposition was 30 (mm). The power of the KrF excimer laser was 1.5 (mJ/cm²/pulse), the pulse width was 20 (nsec), the repetition frequency was 10 (Hz), and the beam spot diameter was 1×1 (mm square).

The deposition rate was 6 (nm/min). The resulting film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°) for the film surface, but no clear diffraction peak was observed. Thus, the In—Sn—O thin film obtained was proved to be amorphous. The electron carrier concentration and the electron mobility of the In—Sn—O amorphous oxide film obtained were $8 \times 10^{17}/\text{cm}^3$ and about 5 cm²/(V·sec), respectively. The film thickness was 100 nm.

Example 7: Formation of In—Ga—O Amorphous Oxide Film by PLD Method

Deposition of an indium gallium oxide is described next. A SiO_2 glass substrate (#1737 produced by Corning) was prepared as the substrate for deposition. As the pre-deposition treatment, the substrate was degreased with ultrasonic waves in acetone, ethanol, and ultrapure water for 5 minutes each, and then dried in air at 100° C.

A $(\text{In}_2\text{O}_3)_{1-x}\text{—}(\text{Ga}_2\text{O}_3)_x$ ($x=0$ to 1) sinter was prepared as the target (size: 20 mm in dia., 5 mm in thickness). For example, when $x=0.1$, the target was an $(\text{In}_{0.9}\text{Ga}_{0.1})_2\text{O}_3$ polycrystalline sinter. This target was obtained by wet-mixing the starting materials, $\text{In}_2\text{O}_3\text{—Ga}_2\text{O}_3$ (4N reagent), in a solvent (ethanol), calcining the resulting mixture (1000° C., 2 h), dry-milling the calcined mixture, and sintering the resulting mixture (1550° C., 2 h).

The ultimate vacuum inside the deposition chamber was 2×10^{-6} (Pa), and the oxygen partial pressure during the deposition was 1 (Pa). The substrate temperature during the deposition was room temperature. The distance between the target and the substrate for deposition was 30 (mm). The power of the KrF excimer laser was 1.5 (mJ/cm²/pulse), the pulse width was 20 (nsec), the repetition frequency was 10 (Hz), and the beam spot diameter was 1×1 (mm square). The deposition rate was 6 (nm/min).

The resulting film was subjected to grazing incidence x-ray diffraction (thin film method, incident angle: 0.5°) for the film surface, but no clear diffraction peak was observed. Thus, the In—Ga—O thin film obtained was proved to be amorphous. The film thickness was 120 nm. The electron carrier concentration and the electron mobility of the In—Ga—O amorphous oxide film obtained were $8 \times 10^{16}/\text{cm}^3$ and about 1 cm²/(V·sec), respectively.

Example 8: Preparation of TFT Element (Glass Substrate) Using In—Zn—Ga—O Amorphous Oxide Film

A top-gate TFT element shown in FIG. 5 was prepared. First, an In—Zn—Ga—O amorphous film 120 nm in thickness for use as a channel layer (2) was formed on a glass substrate (1) by a method of preparing the In—Ga—Zn—O amorphous oxide film according to EXAMPLE 2 at an oxygen partial pressure of 5 Pa while using a polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_4$ as the target.

An In—Ga—Zn—O amorphous film having high electrical conductivity and a gold film each 30 nm in thickness were deposited on the In—Ga—Zn—O amorphous film by a PLD method while controlling the oxygen partial pressure inside the chamber to less than 1 Pa, and a drain terminal (5)

and a source terminal (6) were formed by a photolithographic method and a lift-off method.

Lastly, an Y_2O_3 film (thickness: 90 nm, relative dielectric constant: about 15, leak current density: 10^{-3} A/cm² upon application of 0.5 MV/cm) for use as a gate insulating film (3) was formed by an electron beam deposition method, and gold was deposited on the Y_2O_3 film. A gate terminal (4) was formed by a photolithographic method and a lift-off method. The channel length was 50 μ m and the channel width was 200 μ m.

(Evaluation of Characteristics of TFT Element)

FIG. 6 shows the current-voltage characteristic of the TFT element measured at room temperature. Since the drain current I_{DS} increased with the drain voltage V_{DS} , the channel was found to be of an n-conductivity type. This is consistent with the fact that the amorphous In—Ga—Zn—O oxide film is an n-type conductor. I_{DS} was saturated (pinch-off) at about $V_{DS}=6$ V, which was a typical behavior for semiconductor transistors. The gain characteristic was determined, and the threshold value of the gate voltage V_{GS} when $V_{DS}=4$ V was applied was about -0.5 V. Upon application of $V_G=10$ V, current of $I_{ds}=1.0 \times 10^{-5}$ A flowed. This is because carriers were induced in the In—Ga—Zn—O amorphous semiconductor thin film, i.e., an insulator, due to the gate bias. The on/off ratio of the transistor exceeded 10^3 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $7 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The same measurements were carried out on the element while irradiating the element with visible light, but no change in transistor characteristics was observed. Note that the film can be used as a channel layer of a TFT by controlling the electron carrier concentration of the amorphous oxide to less than $10^{18}/\text{cm}^3$. An electron carrier concentration of $10^{17}/\text{cm}^3$ or less was more preferable, and an electron carrier density of $10^{16}/\text{cm}^3$ or less was yet more preferable.

Example 9: Preparation of TFT Element Using In—Zn—Ga—O Amorphous Oxide Film

A top-gate TFT element shown in FIG. 5 was prepared. In particular, an In—Zn—Ga—O amorphous oxide film 120 nm in thickness for use as a channel layer (2) was formed on a polyethylene terephthalate (PET) film (1) by a deposition method of EXAMPLE 2 in an atmosphere at an oxygen partial pressure of 5 Pa using a polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})$ as the target.

An In—Zn—Ga—O amorphous oxide film having high electrical conductivity and a gold film each 30 nm in thickness were deposited on the In—Zn—Ga—O amorphous oxide film by the PLD method at an oxygen partial pressure inside the chamber of less than 1 Pa, and a drain terminal (5) and a source terminal (6) were formed by a photolithographic method and a lift-off method.

Lastly, a gate insulating film (3) was formed by an electron beam deposition method and gold is deposited thereon. A gate terminal (4) was then formed by a photolithographic method and a lift-off method. The channel length was 50 μ m and the channel width was 200 μ m. Three types of TFTs with the above-described structure were prepared using Y_2O_3 (thickness: 140 nm), Al_2O_3 (thickness: 130 nm) and HfO_2 (thickness: 140 nm), respectively. (Evaluation of Characteristics of TFT Element)

The current-voltage characteristic of the TFT element measured at room temperature was similar to one shown in FIG. 6. Namely, since the drain current I_{DS} increased with

the drain voltage V_{DS} , the channel was found to be of an n-conductivity type. This is consistent with the fact that the amorphous In—Ga—Zn—O amorphous oxide film is an n-type conductor. I_{DS} was saturated (pinch-off) at V_{DS} =about 6 V, which was a typical behavior for semiconductor transistors. When $V_g=0$ V, current of $I_{ds}=10^{-8}$ A flowed, and when $V_g=10$ V, current of $I_{ds}=2.0 \times 10^{-5}$ A flowed. This is because carriers were induced in the In—Ga—Zn—O amorphous oxide thin film, i.e., an insulator, due to the gate bias. The on/off ratio of the transistor exceeded 10^3 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $7 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The element formed on the PET film was inflected at a radius of curvature of 30 mm, and the same transistor characteristic was measured. No change in transistor characteristic was observed.

The TFT including the gate insulating film made from the Al_2O_3 film also showed similar transistor characteristics to those shown in FIG. 6. When $V_g=0$ V, current of $I_{ds}=10^{-8}$ A flowed, and when $V_g=10$ V, current of $I_{ds}=10^{-8}$ A flowed, and when $V_g=10$ V, current of $I_{ds}=5.0 \times 10^{-6}$ A flowed. The on/off ratio of the transistor exceeded 10^2 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $2 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The TFT including the gate insulating film made from the HfO_2 film also showed similar transistor characteristics to those shown in FIG. 6. When $V_g=0$ V, current of $I_{ds}=10^{-8}$ A flowed, and when $V_g=10$ V, current of $I_{ds}=1.0 \times 10^{-6}$ A flowed. The on/off ratio of the transistor exceeded 10^2 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $10 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

Example 10: Preparation of TFT Element Using In_2O_3 Amorphous Oxide Film by PLD Method

A top-gate TFT element shown in FIG. 5 was prepared. First, an In_2O_3 amorphous oxide film 80 nm in thickness for use as a channel layer (2) was formed on a polyethylene terephthalate (PET) film (1) by the deposition method of EXAMPLE 5.

An In_2O_3 amorphous oxide film having high electrical conductivity and a gold layer each 30 nm in thickness were formed on this In_2O_3 amorphous oxide film by the PLD method at an oxygen partial pressure inside the chamber of less than 1 Pa while applying zero voltage to the oxygen radical generator. A drain terminal (5) and a source terminal (6) were then formed by a photolithographic method and a lift-off method.

Lastly, an Y_2O_3 film for use as a gate insulating film (3) was formed by an electron beam deposition method, and gold was deposited on the Y_2O_3 film. A gate terminal (4) was formed by a photolithographic method and a lift-off method. (Evaluation of Characteristics of TFT Element)

The current-voltage characteristics of the TFT element formed on the PET film were measured at room temperature. Since the drain current I_{DS} increased with the drain voltage V_{DS} , the channel was found to be of an n-conductivity type. This is consistent with the fact that the amorphous In—O amorphous oxide film is an n-type conductor. I_{DS} was saturated (pinch-off) at V_{DS} about 5 V, which was a typical behavior for semiconductor transistors. When $V_g=0$ V, current of 2×10^{-8} A flowed, and when $V_g=10$ V, current $I_{ds}=2.0 \times 10^{-6}$ A flowed. This is because carriers were induced in the In—O amorphous oxide thin film, i.e., an

insulator, due to the gate bias. The on/off ratio of the transistor was about 10^2 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $10 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The TFT element formed on a glass substrate showed similar characteristics. The element formed on the PET film was inflected at a radius of curvature of 30 mm, and the same transistor characteristics were measured. No change in transistor characteristics was observed.

Example 11: Preparation of TFT Element Using
In—Sn—O Amorphous Oxide Film by PLD
Method

A top gate TFT element shown in FIG. 5 was prepared. In particular, an In—Sn—O amorphous oxide film 100 nm in thickness for use as a channel layer (2) was formed on a polyethylene terephthalate (PET) film (1) by a deposition method of EXAMPLE 6.

An In—Sn—O amorphous oxide film having high electrical conductivity and a gold film each 30 nm in thickness were deposited on this In—Sn—O amorphous oxide film by the PLD method at an oxygen partial pressure inside the chamber of less than 1 Pa while applying zero voltage to the oxygen radical generator. A drain terminal (5) and a source terminal (6) were formed by a photolithographic method and a lift-off method.

Lastly, an Y_2O_3 film for use as a gate insulating film (3) was formed by an electron beam deposition method and gold was deposited thereon. A gate terminal (4) was then formed by a photolithographic method and a lift-off method. (Evaluation of Characteristics of TFT Element)

The current-voltage characteristic of the TFT element formed on the PET film was measured at room temperature. Since the drain current I_{DS} increased with the drain voltage V_{DS} , the channel was found to be of an n-conductivity type. This is consistent with the fact that the amorphous In—Sn—O amorphous oxide film is an n-type conductor. I_{DS} was saturated (pinch-off) at V_{DS} =about 6 V, which was a typical behavior for semiconductor transistors. When $V_g=0$ V, current of 5×10^{-8} A flowed, and when $V_g=10$ V, current of $I_{ds}=5.0 \times 10^{-5}$ A flowed. This is because carriers were induced in the In—Sn—O amorphous oxide thin film, i.e., an insulator, due to the gate bias. The on/off ratio of the transistor was about 10^3 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $5 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The TFT element formed on a glass substrate showed similar characteristics. The element formed on the PET film was inflected at a radius of curvature of 30 mm, and the same transistor characteristics were measured. No change in transistor characteristics was observed.

Example 12: Preparation of TFT Element Using
In—Ga—O Amorphous Oxide Film by PLD
Method

A top gate TFT element shown in FIG. 5 was prepared. In particular, an In—Ga—O amorphous oxide film 120 nm in thickness for use as a channel layer (2) was formed on a polyethylene terephthalate (PET) film (1) by the deposition method of EXAMPLE 7.

An In—Ga—O amorphous oxide film having high electrical conductivity and a gold film each 30 nm in thickness were formed on this In—Ga—O amorphous oxide film by

the PLD method at an oxygen partial pressure inside the chamber of less than 1 Pa while applying zero voltage to the oxygen radical generator. A drain terminal (5) and a source terminal (6) were formed by a photolithographic method and a lift-off method.

Lastly, an Y_2O_3 film for use as a gate insulating film (3) was formed by an electron beam deposition method and gold was deposited thereon. A gate terminal (4) was then formed by a photolithographic method and a lift-off method.

(Evaluation of Characteristics of TFT Element)

The current-voltage characteristic of the TFT element formed on the PET film was measured at room temperature. Since the drain current I_{DS} increased with the drain voltage V_{DS} , the channel was found to be of an n-conductivity type. This is consistent with the fact that the amorphous In—Ga—O amorphous oxide film is an n-type conductor. I_{DS} was saturated (pinch-off) at V_{DS} =about 6 V, which was a typical behavior for semiconductor transistors. When $V_g=0$ V, current of 1×10^{-8} A flowed, and when $V_g=10$ V, current of $I_{ds}=1.0 \times 10^{-6}$ A flowed. This corresponds to the induction of electron carriers inside the insulator, In—Ga—O amorphous oxide film by the gate bias. The on/off ratio of the transistor was about 10^2 . The field effect mobility was determined from the output characteristics. As a result, a field effect mobility of about $0.8 \text{ cm}^2(\text{Vs})^{-1}$ was obtained in the saturation region.

The TFT element formed on a glass substrate showed similar characteristics. The element formed on the PET film was inflected at a radius of curvature of 30 mm, and the same transistor characteristics were measured. No change in transistor characteristics was observed.

It should be noted that, as described in EXAMPLES above, the film can be used as a channel layer of a TFT by controlling the electron carrier concentration to less than $10^{18}/\text{cm}^3$. The electron carrier concentration is more preferably $10^{17}/\text{cm}^3$ or less and yet more preferably $10^{16}/\text{cm}^3$ or less.

INDUSTRIAL APPLICABILITY

The amorphous oxide of the present invention can be used in semiconductor devices such as thin film transistors. The thin film transistors can be used as switching elements of LCDs and organic EL displays and are also widely applicable to see-through-type displays, IC cards, ID tags, etc.

What is claimed is:

1. A method of forming a field effect thin film transistor device which is used as a normally-OFF type, comprising:
 - providing a drain electrode;
 - providing a source electrode;
 - sputter depositing a channel layer which is contacting with the drain electrode and the source electrode, the channel layer being comprised of a transparent and amorphous indium-gallium-zinc oxide film,
 - wherein the sputtering deposition is performed in an oxygen-partial-pressure-controlled atmosphere at room temperature without adding impurity ions to the channel layer to increase electrical resistance, and using a polycrystalline sinter represented by $\text{InGaO}_3(\text{ZnO})_m$ (wherein m is a natural number less than 6) as a target material,
 - whereby forming the channel layer in which an atomic ratio In:Ga:Zn is 1:1:m (wherein m is a natural number less than 6) having an electron carrier concentration less than $10^{16}/\text{cm}^3$ determined by Hall-effect measurement and an electron mobility of $1 \text{ cm}^2/(\text{V}\cdot\text{sec})$ or more at room temperature;

providing a gate electrode; and
providing a gate insulating film positioned between the
gate electrode and the channel.

2. The method of forming a field effect thin film transistor
according to claim 1, wherein the substrate is one of a glass 5
plate, a plastic plate or a plastic film.

3. The method of forming a field effect thin film transistor
according to claim 1, further comprising a step of heating the
indium-gallium-zinc oxide film in a reducing atmosphere to
increase the electron carrier concentration after the film 10
formation.

4. The method of forming a field effect thin film transistor
according to claim 1, the transistor is a switching element of
LCDs or organic EL displays.

* * * * *