



(12) EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
20.09.2006 Bulletin 2006/38

(51) Int Cl.:
B01J 27/24^(2006.01) C25B 11/06^(2006.01)
H01M 4/90^(2006.01)

(21) Application number: 04819836.0

(86) International application number:
PCT/JP2004/017801

(22) Date of filing: 30.11.2004

(87) International publication number:
WO 2005/053840 (16.06.2005 Gazette 2005/24)

(84) Designated Contracting States:
DE

(30) Priority: 02.12.2003 JP 2003403653

(71) Applicant: Japan Science and Technology Agency
Kawaguchi-shi
Saitama 332-0012 (JP)

(72) Inventors:
• OTA, Kenichiro
Koganei-shi, Tokyo, 1840015 (JP)
• KAMIYA, Nobuyuki
Yokohama-shi, Kanagawa, 2440814 (JP)


• ISHIHARA, Akimitsu
Kanagawa, 2540821 (JP)
• DOUMEN, Kazunari
Kanagawa, 2280803 (JP)
• HARA, Michikazu
Kanagawa, 2310838 (JP)

(74) Representative: Röthinger, Rainer
c/o Wuesthoff & Wuesthoff
Patent- und Rechtsanwälte
Schweigerstrasse 2
81541 München (DE)

(54) METAL OXYNITRIDE ELECTRODE CATALYST

(57) [Problems] Carbides and many other non-platinum-based compounds are activated and dissolved and cannot be stably present in an acidic electrolyte under conditions of an electrode potential as high as 0.4 V or above, and thus, the application range of these compounds as an electrode catalyst is limited to low electrode potentials. There has been need for development of an electrode catalyst that maintains catalytic activity under these conditions and exhibits improved stability.

[Means for Solving Problems] To provide a metal oxynitride electrode catalyst composed of an oxynitride containing at least one transition metal element selected from the group consisting of La, Ta, Nb, Ti, and Zr, the metal oxynitride electrode catalyst being used at a potential of 0.4 V or higher relative to the reversible hydrogen electrode potential in an acidic electrolyte. The metal oxynitride electrode catalyst is useful as an electrode catalyst for electrochemical systems used in acidic electrolytes in the fields of water electrolysis, organic electrolysis, fuel cells, etc.

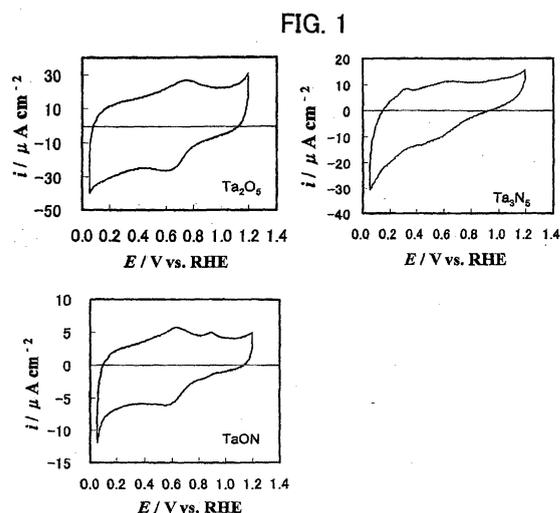

Description

Technical Field

[0001] The present invention relates to electrode catalysts for electrochemical systems used in acidic electrolytes in the fields of water electrolysis, organic electrolysis, fuel cells, etc.

Background Art

[0002] Noble metals, in particular, platinum, are stable at high electrical potentials and have high catalytic activity for various reactions, and thus are used as electrode catalysts for various electrochemical systems. However, because of the high cost and limited reserves of platinum and since electrode catalysts having higher activity are required for fuel cells, alternative materials to platinum catalysts have been desired.

[0003] Metal oxynitrides have been developed as photocatalysts that decompose water under visible light (e.g., Non-Patent Document 1 and Patent Document 1). However, there have been no attempts to use metal oxynitrides as electrode catalysts.

[0004] Non-Patent Document 1: M. Hara et al., Catal. Today., 78,555 (2003)

Patent Document 1: Japanese Unexamined Patent Application Publication No. 2001-205104

Patent Document 2: Japanese Unexamined Patent Application Publication No. 2002-66333

Patent Document 3: Japanese Unexamined Patent Application Publication No. 2002-154823

Patent Document 4: Japanese Unexamined Patent Application Publication No. 2002-321907

Disclosure of Invention

Problems to be Solved by the Invention

[0005] It has been reported that, in general, carbides and many other non-platinum-based compounds are activated and dissolved and cannot be stably present in an acidic electrolyte under conditions of an electrode potential as high as 0.4 V or above (Hiroshi Yoneyama et al., *Denkikagaku*, 41,719 (1973)). Thus, the application range of these compounds as an electrode catalyst is limited to low electrode potentials. There has been need for development of an electrode catalyst that maintains catalytic activity under these conditions and exhibits improved stability.

Means for Solving the Problems

[0006] The present invention provides an electrode catalyst composed of an oxynitride containing at least one transition metal selected from the group consisting of La, Ta, Nb, Ti, and Zr. The present inventors have found that the metal oxynitrides can exhibit corrosion re-

sistance such that they are not dissolved even if used at a potential of 0.4 V or higher relative to the reversible hydrogen electrode potential in an acidic electrolyte.

[0007] That is, according to the present invention, (1) a metal oxynitride electrode catalyst includes an oxynitride containing at least one transition metal element selected from the group consisting of La, Ta, Nb, Ti, and Zr and is used at a potential of 0.4 V or higher relative to the reversible hydrogen electrode potential in an acidic electrolyte.

[0008] Furthermore, according to the present invention, (2) the metal oxynitride electrode catalyst is dispersed as fine particles on a catalyst carrier which is an electronically conductive powder.

[0009] Furthermore, according to the present invention, (3) the metal oxynitride electrode catalyst is used as an electrode catalyst for fuel cells using an acidic electrolyte.

Advantages

[0010] A metal oxynitride electrode catalyst of the present invention exhibits high corrosion resistance in an acidic electrolyte at a high electrode potential and also has oxygen reduction catalytic activity.

Best Mode for Carrying Out the Invention

[0011] An electrode catalyst of the present invention is composed of an oxynitride containing at least one transition metal element selected from the group consisting of La, Ta, Nb, Ti, and Zr and can be used at a potential of 0.4 V or higher relative to the reversible hydrogen electrode potential in an acidic electrolyte, and thus the electrode catalyst is useful as an oxygen reduction catalyst. The upper limit of the potential depends on the stability of the electrode, and the electrode catalyst can be used at a potential of up to about 1.6 V relative to the potential at which oxygen is generated. If the potential exceeds 1.6 V, simultaneously with the generation of oxygen from the surface of the oxynitride, the oxynitride is gradually oxidized to an oxide. If the potential is less than 0.4 V, although there is no problem from the standpoint of stability of the oxynitride, usefulness of the oxynitride is low from the standpoint of it being used as an oxygen reduction catalyst.

[0012] Each of the transition metals La, Ta, Nb, Ti, and Zr is not eroded and is stable in an acidic electrolyte at high potentials, and since an oxide thereof constitutes the surface of the catalyst, the catalyst itself can be stably present. However, such an oxide does not have oxygen reduction catalytic activity. By partially nitriding the oxide to form an oxynitride, the electronic state continuously changes, and at a certain degree of nitriding, catalytic activity is believed to be exhibited. In general, catalytic activity at a transition metal:oxygen:nitrogen atomic ratio of about $1 \pm 0.1 : 1 \pm 0.1 : 1 \pm 0.1$ is desirable.

[0013] The metal oxynitride electrode catalyst of the

present invention may be used by being dispersed as fine particles on a catalyst carrier which is an electronically conductive powder of carbon, a conductive oxide such as tungsten oxide or iridium oxide, or the like.

[0014] In order to produce the metal oxynitride electrode catalyst of the present invention, at least one metal oxide is used as a starting metal compound and a single metal compound or a mixture of metal compounds is allowed to react with ammonia, an ammonium salt, hydrazine, nitrogen, a metal nitride, a metal amide, a metal amine complex, or the like to perform synthesis. The reaction may be carried out using an appropriate method, for example, a method in which a powdered mixture of a starting metal compound and a nitrogen-containing compound is heated, or a method in which the surface of a starting metal plate is oxidized to form a starting metal oxide, and only the surface thereof is partially nitrated with nitrogen or a nitrogen-containing compound.

[0015] When a metal salt or a metal complex is used as a starting material, preferably, prior to nitriding, a metal oxide is formed as a precursor, for example, by a method in which the starting material is dissolved in an organic solvent, such as an alcohol, and subjected to heat treatment at a temperature of 923 K in air for 2 hours.

[0016] When a powdery metal compound is used as a starting material, since the size of the resulting metal oxynitride fine particles substantially depends on the size of the starting material powder, by adjusting the size of the starting material powder, fine particles with a desired size can be obtained.

[0017] The reaction temperature is in a range of 673 K to 1,473 K. If the temperature is lower than 673 K, the reaction rate is low and the reaction does not proceed. Although the reaction proceeds if a long time is taken, nitriding of the inner portion does not easily proceed compared with the degree of nitriding of the peripheral portion that is easily brought into contact with the nitrogen-containing compound of the starting metal oxide. Thus, the degree of nitriding differs depending on the location and it is difficult to obtain a uniformly nitrated product. If the temperature is higher than 1,473 K, decomposition occurs and an oxynitride is not formed.

[0018] During the reaction, if nitriding is allowed to proceed completely, a complete nitride is formed. The complete nitride is stable, but has low oxygen reduction catalytic activity. An oxynitride containing both oxygen and nitrogen in the middle of nitriding using a metal compound as a starting material only exhibits oxygen reduction catalytic activity. For example, in the case of Ta (tantalum), the nitrogen content of starting tantalum oxide is 0 percent by weight, the nitrogen content of completely nitrated tantalum nitride is 11 percent by weight, and the nitrogen content of tantalum oxynitride having oxygen reduction catalytic activity is about 6 to 9 percent by weight.

[0019] In particular, reaction between a metal oxide and ammonia is advantageous as the synthesis method of the electrode catalyst of the present invention. In the reaction, as nitriding proceeds, oxygen is liberated. Thus,

ammonia serves as both a reducing agent and a nitriding agent. By changing the feed rate of ammonia and the reaction temperature, the degree of nitriding can be controlled.

5 **[0020]** During the reaction, by using a mixed gas of water vapor and nitrogen in addition to ammonia to change the partial pressure of ammonia and decrease the nitriding rate, it is possible to easily obtain a uniformly nitrated oxynitride in which the difference in the degree of nitriding depending on the location is small.

EXAMPLES

Example 1

15 **[0021]** A tantalum oxide Ta_2O_5 powder (manufactured by KOJUNDO CHEMICAL LABORATORY CO., LTD., purity 99.9%, average particle size 0.5 μm) was used as a starting material, enveloped in quartz wool so as to readily pass ammonia gas, and retained in a reaction tube. A mixed gas of ammonia (purity 99.999%), water vapor, and nitrogen was introduced into the reaction tube and left to stand until the gas flow became substantially steady (for about 60 minutes). Subsequently, nitriding was performed at 850°C (heating rate: 10°C/min), and the introduction of the mixed gas was stopped before nitriding completely proceeded. A tantalum oxynitride powder with a size of several hundred nanometers was obtained.

Comparative Example 1

[0022] A Ta_2O_5 powder which was not nitrated was used as a sample.

35 Comparative Example 2

A Ta_2O_5 powder was used as a starting material as in Example 1, and a Ta_3N_5 powder in which nitriding was allowed to completely proceed was prepared.

[0023] The tantalum oxynitride powder prepared in Example 1, the Ta_2O_5 powder of Comparative Example 1, and the Ta_3N_5 powder prepared in Comparative Example 2 were each applied to a glassy carbon electrode (diameter: 5.2 mm), and Nafion (Registered Trademark) coating was performed. When the catalyst was applied, 0.1 g of the catalyst was mixed in 5 ml of water so as to enable equivalent coating. Then, stirring and suspending were performed by ultrasonic waves to prepare a solution, and 30 μl of the solution was applied so that the catalyst was uniformly dispersed. The glassy carbon electrode applied with the catalyst was immersed in 0.1 mol/dm³ of a sulfuric acid solution, and an experiment was conducted at 30°C at atmospheric pressure. The experiment was conducted both in a nitrogen gas atmosphere and in an oxygen gas atmosphere. As a reference electrode, a reversible hydrogen electrode was used in a sulfuric acid solution with the same concentration. The current density was measured in terms of geometric area.

[0024] Fig. 1 shows a current-potential curve of the

resulting tantalum oxynitride at a reaction temperature of 30°C in a nitrogen atmosphere when scanning was performed at 50 mV/s at a potential in a range of 0.05 to 1.2 V. The results in Comparative Examples 1 and 2 are also shown. As is evident from Fig. 1, in each case, even if scanning of potential is repeated, the shape of the curve is not changed and the stable presence in the sulfuric acid solution is confirmed.

[0025] Fig. 2 shows current-potential curves in an oxygen atmosphere under similar conditions. In each of Comparative Examples 1 and 2, an oxygen reduction current is observed at 0.2 V or less. Thus, the oxygen reduction catalytic activity thereof is considered to be significantly low. In contrast, in Example 1, reduction current is observed in the vicinity of 0.8 V or less, which means the presence of oxygen reduction catalytic activity.

[0026] Fig. 3 shows current-potential curves when the potential was scanned from 1.2 V in the negative direction at a scanning rate of 5 mV/s at a reaction temperature of 30°C in an oxygen atmosphere. In Comparative Examples 1 and 2, the oxygen reduction current is observed in the vicinity of 0.3 V or less. In contrast, in Example 1, the oxygen reduction current is observed at 0.8 V or less, indicating the presence of excellent oxygen reduction catalytic activity.

[0027] Fig. 4 shows the relationship between the logarithm of the oxygen reduction current density of TaON obtained by the method of Example 1 and the electrode potential. It is possible to obtain the number of reaction electrons in the rate-determining step of the reaction from the slope of the inclined line in Fig. 4. Fig. 4 shows that the slope of the inclined line is -130 mV/decade, on the basis of which the number of reaction electrons is estimated to be one. That is, the rate-determining step involves one electron reaction. Industrial Applicability

[0028] The metal oxynitride electrode catalysts of the present invention are useful as electrode catalysts for electrochemical systems used in acidic electrolytes in the fields of water electrolysis, organic electrolysis, fuel cells, etc.

Brief Description of the Drawings

[0029]

[Fig. 1] Fig. 1 includes graphs showing current-potential curves in a nitrogen atmosphere with respect to the electrode catalysts of Comparative Examples 1 and 2 and Example 1.

[Fig. 2] Fig. 2 includes graphs evaluating the catalytic activity of oxygen reduction reaction of the electrode catalysts of Comparative Examples 1 and 2 and Example 1.

[Fig. 3] Fig. 3 is a graph evaluating the catalytic activity of oxygen reduction reaction of the electrode catalyst of Example 1.

[Fig. 4] Fig. 4 is a graph estimating the number of reaction electrons in the rate-determining step in the

oxygen reduction reaction of Example 1.

Claims

1. A metal oxynitride electrode catalyst comprising an oxynitride containing at least one transition metal element selected from the group consisting of La, Ta, Nb, Ti, and Zr, the metal oxynitride electrode catalyst being used at a potential of 0.4 V or higher relative to the reversible hydrogen electrode potential in an acidic electrolyte.
2. The metal oxynitride electrode catalyst according to Claim 1, wherein the metal oxynitride electrode catalyst is dispersed as fine particles on a catalyst carrier which is an electronically conductive powder.
3. The metal oxynitride electrode catalyst according to Claim 1, wherein the metal oxynitride electrode catalyst is used as an electrode catalyst for fuel cells using an acidic electrolyte.

FIG. 1

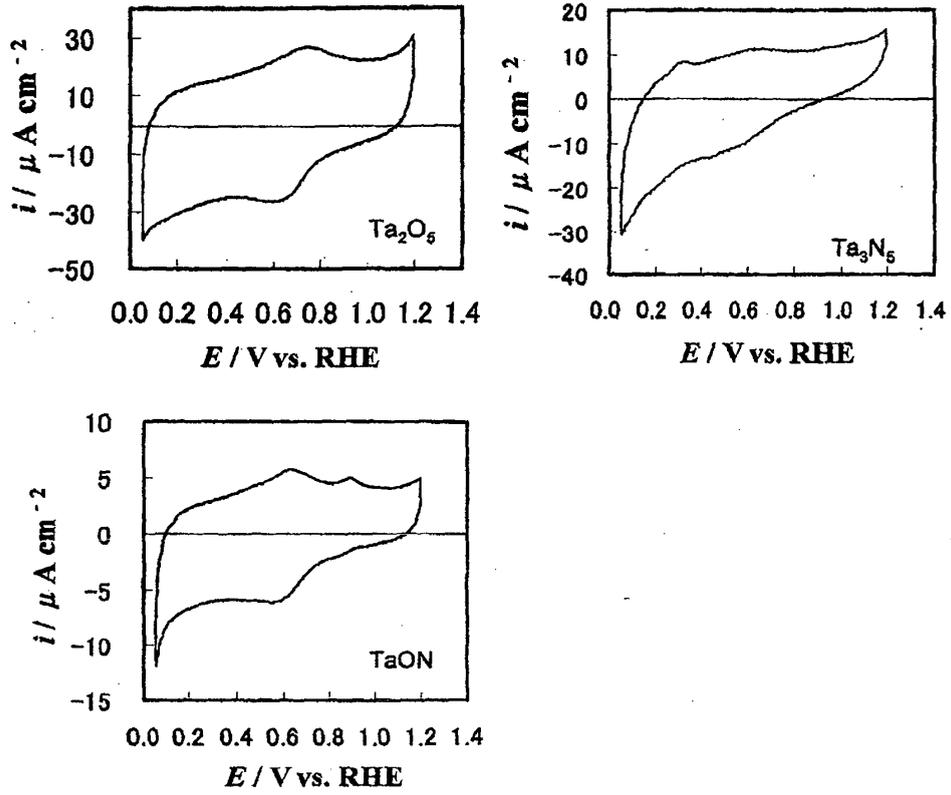


FIG. 2

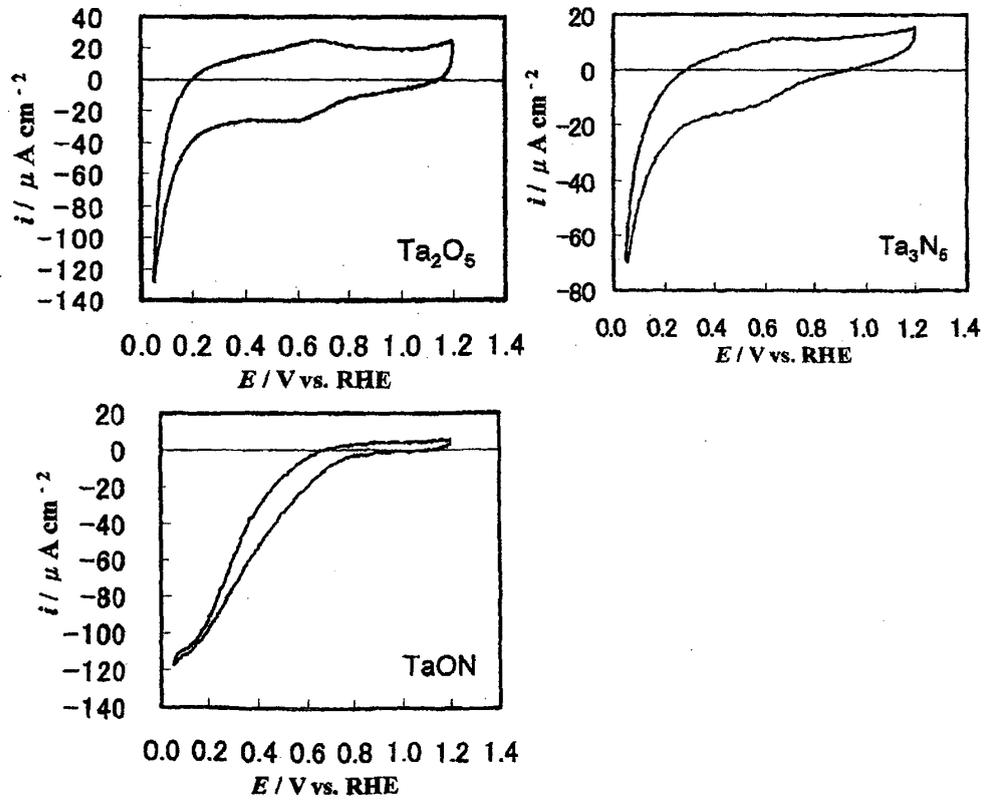


FIG. 3


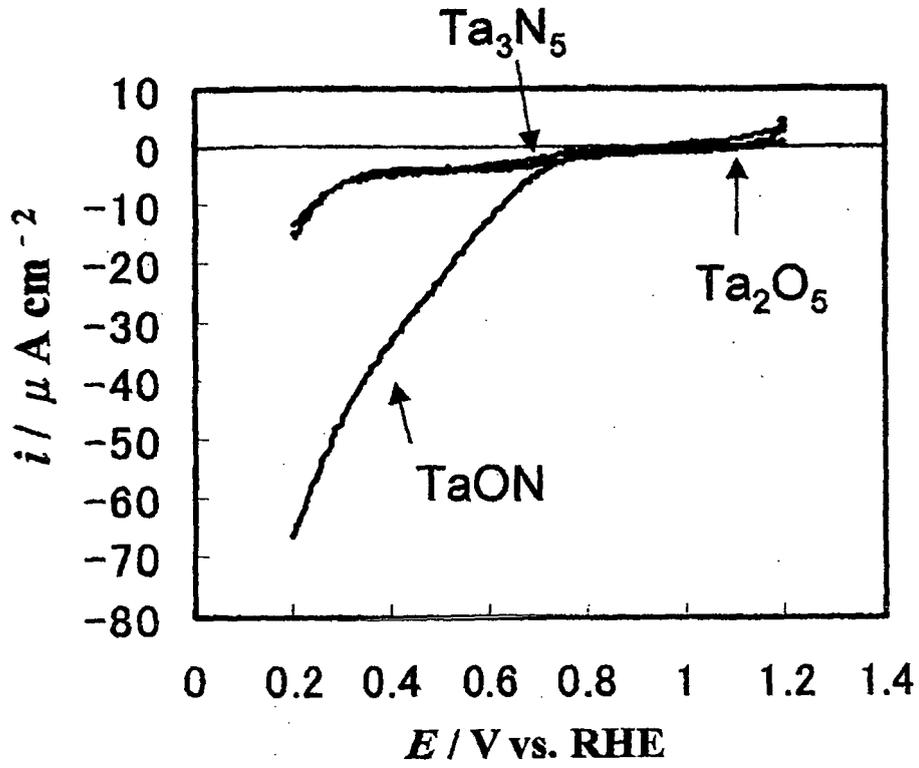


FIG. 4

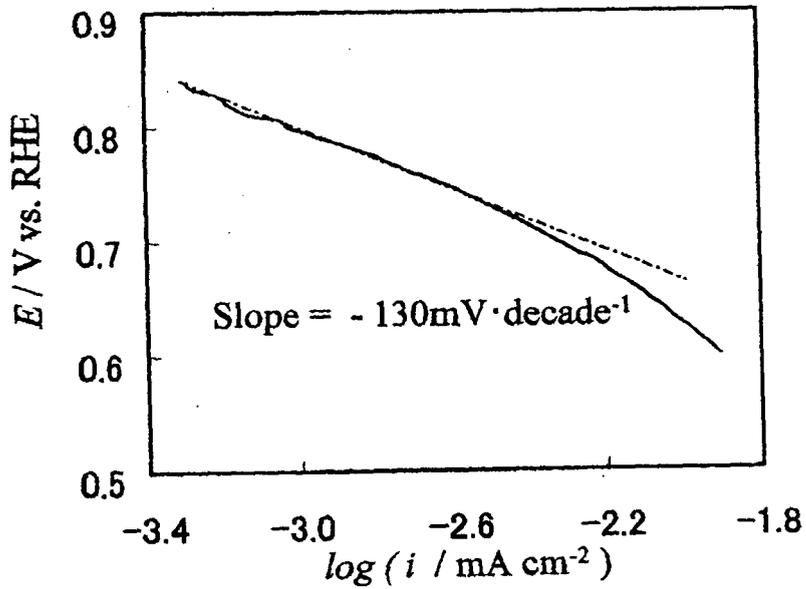

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/017801

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ B01J27/24, C25B11/06, H01M4/90		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ B01J21/00-38/74, C25B11/06, H01M4/90		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2005 Kokai Jitsuyo Shinan Koho 1971-2005 Jitsuyo Shinan Toroku Koho 1996-2005		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CA (STN)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	W.J.CHUN et al., Conduction and Valence Band Positions of Ta ₂ O ₅ , TaON, and Ta ₃ N ₅ by UPS and Electrochemical Methods, Journal of Physical Chemistry B, 27 February, 2003 (27.02.03), Vol.107, No.8, pages 1798 to 1803	1-3
A	JP 2000-048833 A (Toyota Motor Corp.), 18 February, 2000 (18.02.00), (Family: none)	1-3
P, A	JP 2004-303664 A (Japan Science and Technology Agency), 28 October, 2004 (28.10.04), (Family: none)	1-3
<input type="checkbox"/> Further documents are listed in the continuation of Box C.		<input type="checkbox"/> See patent family annex.
* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 04 March, 2005 (04.03.05)	Date of mailing of the international search report 22 March, 2005 (22.03.05)	
Name and mailing address of the ISA/ Japanese Patent Office	Authorized officer	
Facsimile No.	Telephone No.	

Form PCT/ISA/210 (second sheet) (January 2004)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2001205104 A [0004]
- JP 2002154823 A [0004]
- JP 2002066333 A [0004]
- JP 2002321907 A [0004]

Non-patent literature cited in the description

- **M. HARA et al.** *Catal. Today.*, 2003, vol. 78, 555 [0004]