



(11) **EP 1 806 798 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
11.07.2007 Bulletin 2007/28

(51) Int Cl.:
H01M 4/90^(2006.01) H01M 8/10^(2006.01)

(21) Application number: **05772649.9**

(86) International application number:
PCT/JP2005/015052

(22) Date of filing: **18.08.2005**

(87) International publication number:
WO 2006/019128 (23.02.2006 Gazette 2006/08)

(84) Designated Contracting States:
DE

(30) Priority: **19.08.2004 JP 2004239589**
29.03.2005 JP 2005093651

(71) Applicant: **Japan Science and Technology Agency**
Kawaguchi-shi,
Saitama 332-0012 (JP)

(72) Inventors:
• **OTA, Kenichiro**
Koganei-shi,
Tokyo 184-0015 (JP)
• **KAMIYA, Nobuyuki**
Yokohama-shi,
Kanagawa 244-0814 (JP)


• **ITSUSHIMA, Shigenori**
Kamakura-shi,
Kanagawa 247-0072 (JP)
• **ISHIHARA, Akimitsu**
Hiratsuka-shi,
Kanagawa 254-0821 (JP)
• **YAN, Liu**
YuQuanXiLi-2Qu,Beijing,100040 (CN)

(74) Representative: **Röthinger, Rainer**
Wuesthoff & Wuesthoff
Patent- und Rechtsanwälte
Schweigerstrasse 2
81541 München (DE)

(54) **METAL OXIDE ELECTRODE CATALYST**

(57) A corrosion-resistant electrode catalyst for oxygen reduction is **characterized by** including a main catalyst composed of at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 and a co-catalyst composed of gold, the electrode catalyst being used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential. The catalyst may be used, for example, in such a form that the transition metal oxide in the form of fine particles and gold in the form of fine particles, or fine particles including fine gold particles coated with the transition metal oxide are dispersed on a catalyst carrier which is an electron conductive powder. This electrode catalyst is suitable as an electrode catalyst for an electrochemical system using an acidic electrolyte in the fields of water electrolysis, inorganic/organic electrolysis, fuel cells, etc.

FIG. 4

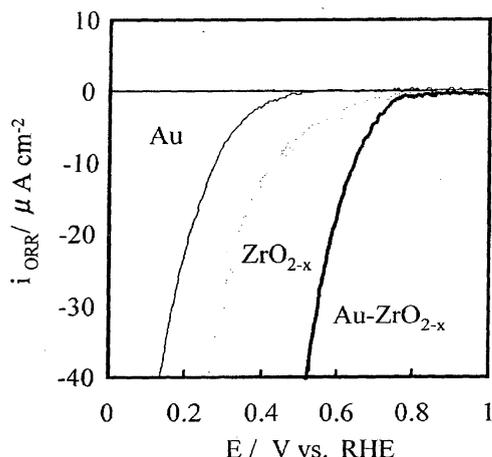

Description

Technical Field

5 **[0001]** The present invention relates to electrode catalysts for oxygen reduction for electrochemical systems which use acidic electrolytes in the fields of water electrolysis, inorganic/organic electrolysis, fuel cells, etc. More particularly, the invention relates to an electrode catalyst for oxygen gas diffusion electrodes of fuel cells which use solid polymer electrolyte membranes.

10 Background Art

[0002] Noble metals, in particular, platinum, are stable over a wide potential range and have high catalytic activity for various reactions, and thus are used as electrode catalysts for various electrochemical systems.

15 **[0003]** Some metal oxides are stable in acidic electrolytes over a wide potential range. Therefore, research has been conducted on enhancing the catalytic activity of platinum by allowing metal oxides to coexist with platinum (for example, Non-patent Documents 1 and 2, and Patent Document 1). However, the catalytic activity of metal oxides themselves has not been evaluated in detail.

20 **[0004]** With respect to catalysts having high oxygen reduction activity, other than noble metals, use of spinel-type and perovskite-type oxides (Patent Document 2) and double oxides, such as oxides having a columbite structure, an ilmenite structure, an olivine structure, a NASICON structure, and the like as catalysts for fuel cells, air cells, oxygen sensors, etc. (Patent Document 2) has been known. Furthermore, an electrode catalyst in which rare-earth oxide fine particles are mixed as a co-catalyst with noble metal catalyst fine particles and which is suitable for use in gas diffusion electrodes for brine electrolysis and the like (Patent Document 4) has also been known.

25 **[0005]** Furthermore, in an apparatus in which an ozone generator for supplying an ozone-containing gas is installed upstream of a fuel cell that uses a solid polymer electrolyte membrane, a method has been known in which as a catalyst suitable for reduction reaction of ozone, a metal oxide selected from WO_3 , TiO_2 , ZrO_2 , PtO , Sb_2O_4 , and Sb_2O_3 is used as an electrode catalyst (Patent Document 5). In addition, as oxide-based electrode catalysts, use of TiO_2 , Ta_2O_5 , and the like has been known (Patent Documents 6 to 10).

30 Patent Document 1: Japanese Unexamined Patent Application Publication No. 9-167620
 Patent Document 2: Japanese Unexamined Patent Application Publication No. 7-289903
 Patent Document 3: Japanese Unexamined Patent Application Publication No. 2003-200051
 Patent Document 4: Japanese Unexamined Patent Application Publication No. 2004-197130
 Patent Document 5: Japanese Unexamined Patent Application Publication No. 2004-95263
 35 Patent Document 6: Japanese Unexamined Patent Application Publication No. 3-252057
 Patent Document 7: Japanese Patent No. 3149629
 Patent Document 8: United States Patent Application No. 2004/0058808
 Patent Document 9: PCT Japanese Translation Patent Publication No. 2001-522122
 Patent Document 10: Japanese Unexamined Patent Application Publication No. 2005-63677
 40 Non-patent Document 1: J. Shim et al., J. Power Sources, 102, 172 (2001)
 Non-patent Document 2: A. Katayama., J. Phys. Chem., 84, 376 (1980)

Disclosure of Invention

45 Problems to be Solved by the Invention

[0006] Alternative materials to platinum catalysts have been desired because of the high cost and limited reserves of platinum and because electrode catalysts having higher activity are required for fuel cells and the like. In general, many oxides dissolve in acidic electrolytes. Furthermore, it has been reported that carbides and many other non-platinum-based compounds are activated and dissolved and cannot be stably present under conditions of an electrode potential as high as 0.4 V or above (Hiroshi Yoneyama et al., Denki Kagaku, 41, 719 (1973)).

50 **[0007]** Although double oxides, such as perovskite, are known as electrode catalysts, double oxides are not suitable for use as electrode catalysts for oxygen reduction for electrochemical systems which use acidic electrolytes. Furthermore, as described in Patent Document 5, an oxide, such as WO_3 , is used for reduction of ozone. However, a Pt catalyst is combined with the oxide for reduction of oxygen.

55 **[0008]** There is hardly any alternative to noble metals as catalysts in electrochemical systems, such as solid polymer fuel cells, phosphoric-acid fuel cells, sulfuric-acid fuel cells, and water electrolysis cells, which use acidic electrolytes, such as phosphoric acid, sulfuric acid, and proton-conduction polymer membranes. Consequently, it has been difficult

to search for electrode catalysts that maintain catalytic activity and are stable over a wide potential range in an acidic electrolyte.

Means for Solving the Problems

[0009] The present invention provides an electrode catalyst for oxygen reduction including at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , SnO_2 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 . The present inventors have found that, depending on the mode of use, these metal oxides can exhibit corrosion resistance such that they are not dissolved even if used at a potential higher than 0 V relative to the reversible hydrogen electrode potential in an acidic electrolyte, and that, in particular, if gold is used as a co-catalyst, the oxygen reduction activity of the electrode further improves and the metal oxides can be used as electrode catalysts that are used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential.

[0010] That is, according to the present invention, (1) a corrosion-resistant electrode catalyst for oxygen reduction is characterized by including a main catalyst composed of at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 and a co-catalyst composed of gold, the electrode catalyst being used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential.

[0011] Furthermore, (2) in the corrosion-resistant electrode catalyst for oxygen reduction of the present invention according to item (1), the transition metal oxide in the form of fine particles and gold in the form of fine particles are dispersed on a catalyst carrier which is an electron conductive powder.

[0012] Furthermore, (3) in the corrosion-resistant electrode catalyst for oxygen reduction of the present invention according to item (1), fine particles including fine gold particles coated with the transition metal oxide are dispersed on a catalyst carrier which is an electron conductive powder.

[0013] Furthermore, (4) in the corrosion-resistant electrode catalyst for oxygen reduction of the present invention according to any one of items (1) to (3), the electrode catalyst is used as an oxygen electrode catalyst of a fuel cell which uses an acidic electrolyte, such as a solid polymer membrane, phosphoric acid, or sulfuric acid.

[0014] The present inventors have found that since adsorption bond energy between transition metal atoms and oxygen atoms is high in at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , SnO_2 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 , depending on the mode of use, these metal oxides are not eroded in an acidic electrolyte over a wide potential range and are stable, that by forming the catalyst such that the surface thereof is covered with the metal oxides, the catalyst itself can be present stably, and that the metal oxides have catalytic activity for oxygen reduction in which oxygen in oxygen (O_2) gas used as an oxidizing agent is received due to oxygen deficiency and oxygen is allowed to react with protons in the electrolyte.

[0015] However, use of the transition metal oxide alone does not make it possible to obtain a sufficiently high potential relative to the reversible hydrogen electrode potential in contact with an acidic electrolyte. The present inventors have found that by allowing gold, as a co-catalyst, to coexist with the main catalyst composed of such a transition metal oxide, the electrode catalyst can be used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential, and the oxygen reduction activity of the electrode can be further improved.

Advantages

[0016] A corrosion-resistant electrode catalyst for oxygen reduction according to the present invention has high corrosion resistance in contact with an acidic electrolyte over a wide potential range and also has catalytic activity for oxygen reduction.

Best Mode for Carrying Out the Invention

[0017] An electrode catalyst of the present invention includes a main catalyst composed of at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , SnO_2 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 . In these metal oxides, adsorption bond energy between metal atoms and oxygen atoms is high. An adsorption bond energy of 550 kJ/mol or higher is required in order that a catalyst for oxygen reduction for a solid polymer fuel cell is stable in an acidic electrolyte. Each of Fe, Co, and Ni is on the order of 400 to 500 kJ/mol, which is lower than those of Zr and V, and actually, is actively dissolved in an acidic electrolyte, thus being unstable. Furthermore, noble metal oxides have low adsorption bond energy and are unstable.

[0018] Depending on the mode of use, at least one transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , SnO_2 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 can be used in an acidic electrolyte at a potential higher than 0 V relative to the reversible hydrogen electrode potential. At 0 V or lower, hydrogen generation proceeds and the oxide may be reduced, which makes it impossible to use the oxide as an electrode catalyst.

[0019] Fig. 1 shows current-potential curves measured at a potential-scanning rate of 1 mV/s in an oxygen reduction

reaction when ZrO_{2-x} layers, as a transition metal oxide, with various thicknesses were formed by sputtering on the surface of glassy carbon. Fig. 2 shows the dependency of the electrode potential at $-1 \mu\text{Acm}^{-2}$ on the thickness of ZrO_{2-x} layers measured at a potential-scanning rate of 1 mV/s.

[0020] As is evident from Figs. 1 and 2, in view of the level of electrode potential, the thickness of the ZrO_{2-x} layer is preferably in a range of about 20 (indicated by II in Fig. 1) to 30 nm (indicated by III in Fig. 1). The reason for this is believed to be that as the thickness changes, the compositional ratio between the transition metal and oxygen at the surface changes, and at a thickness of 20 to 30 nm, the catalytic activity becomes high. If the thickness is excessively large, such as 50 nm (indicated by IV in Fig. 1), the resistance increases and the current decreases.

[0021] Consequently, in order that the electrode catalyst can be used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential, it is important to adjust the thickness, which is the mode of use of the transition metal oxide. Furthermore, in order that catalytic activity can be obtained without impairing stability in an acidic electrolyte, preferably, the oxygen deficiency is in the following ranges: ZrO_{x1} ($0.25 < x1 < 2.0$), TaO_{x2} ($0.15 < x2 < 2.5$), NbO_{x3} ($0.15 < x3 < 2.5$), TiO_{x4} ($0.25 < x4 < 2.0$), VO_{x5} ($0.15 < x5 < 2.5$), MoO_{x6} ($0.75 < x6 < 3.0$), and WO_{x7} ($0.75 < x7 < 3.0$).

[0022] When gold, as a co-catalyst, is allowed to coexist with the main catalyst composed of the transition metal oxide, the oxygen reduction activity of the electrode is further improved. By allowing gold to coexist with the transition metal oxide, transfer of electrons occurs between the transition metal oxide and gold. As a result, the electronic state of the transition metal oxide changes and the catalytic activity improves.

[0023] The transition metal oxide and gold are allowed to coexist in any manner such that transfer of electrons therebetween is possible. For example, the transition metal oxide and gold may be in the form of an alloy or a solid solution. Alternatively, a structure may be used in which an electrode base is coated with a gold layer and the gold layer is further coated with a transition metal oxide layer. A mixture of fine particles may be used as long as electrical contact is sufficiently ensured.

[0024] Furthermore, since gold itself does not participate in reaction, a powder catalyst may be used in which fine gold particles with a diameter in the range of about 2 nm to about 30 nm are used as nuclei, and the fine gold particles are coated with the transition metal oxide. In such a case, fine gold particles are prepared in advance by a colloid method or the like. The previously prepared fine gold particles are dispersed in a solution containing metal ions constituting the oxide, and by adjusting pH, the metal is precipitated as a hydroxide around the fine gold particles. The hydroxide is subjected to dehydration/condensation using moderate heat treatment or the like, and thereby, a powder catalyst in which the fine gold particles are coated with the oxide is obtained.

[0025] The metal oxide and gold for the electrode catalyst for oxygen reduction of the present invention can be used by dispersing fine particles of each of the metal oxide and gold, or fine particles including fine gold particles coated with the transition metal oxide, in an amount of about 60% to 95% by weight, on a catalyst carrier which is an electron conductive powder composed of carbon or a conductive oxide, such as tungsten oxide or iridium oxide.

[0026] In order to produce the metal oxide used for the electrode catalyst for oxygen reduction, a method may be employed in which a metal salt or a metal complex is used as a starting material compound, and such a compound alone or in combination is dissolved in an organic solvent, such as an alcohol, and heat treatment is performed at about 923 K in air for about 2 hours. Thereby, fine particles with a primary particle size of about several nanometers to several hundred nanometers are produced, and secondary particles with a size of several micrometers in which the primary particles are aggregated are formed.

[0027] When a powder is used as the starting metal compound, the size of the resulting metal oxide fine particles is substantially determined according to the size of the starting material powder. Consequently, by adjusting the size of the starting material powder, it is possible to obtain fine particles with a desired size, for example, a primary particle size of 20 to 30 nm.

[0028] In order to form an electrode catalyst, dispersion on an electron conductive powder is preferred. Thus, preferably, fine particles with a particle size of 20 to 30 nm are dispersed on carbon, such as carbon black. For that purpose, a method in which the oxide catalyst is mechanically mixed with carbon, a method in which carbon powder is mixed in advance with a solution for forming the oxide catalyst, or the like may be employed.

[0029] In order to form the metal oxide layer on the gold layer, a method may be used in which a gold layer is formed by sputtering on a base, such as glassy carbon, in advance, and then sputtering is performed in an inert atmosphere, such as an argon atmosphere, using a transition metal oxide as a target, or reactive sputtering is performed in an oxygen atmosphere with an oxygen partial pressure of about 0.01 to 0.5 Pa, using a transition metal as a target.

[0030] Fig. 3 shows current-potential curves measured at a potential-scanning rate of 5 mV/s in an oxygen reduction reaction when a ZrO_2 layer, as a transition metal oxide layer, was formed by sputtering with a thickness of 30 nm. In this case, an increase in the catalytic activity is observed when the thickness of the gold layer formed on the surface of glassy carbon is about 3 nm (indicated by I in Fig. 3), and as the thickness of the gold layer increases, the catalytic activity increases. A thickness of the gold layer of about 10 nm (indicated by III in Fig. 3) is sufficient.

[0031] When the metal oxide is used for a fuel cell using carbon powder, such as carbon black, as a catalyst carrier

which is an electron conductive powder that is chemically and electrochemically stable in the operating environment, by dispersing metal oxide fine particles and fine gold particles with a diameter of about 20 to 30 nm in the carbon, the amount of catalyst can be decreased.

[0032] Electrode catalysts for oxygen reduction according to the present invention can be used as electrode catalysts for oxygen reduction for electrochemical systems which use acidic electrolytes in the fields of water electrolysis, inorganic/organic electrolysis, fuel cells, etc., and in particular, can be used for acidic electrolyte-type fuel cells, such as phosphoric-acid fuel cells and polymer electrolyte fuel cells, which use electrode catalysts for oxidizing agent electrodes.

EXAMPLE 1

[0033] Using a glassy carbon cylinder with a diameter of 5.2 mm, a gold layer of 10 nm was first formed on a bottom face thereof by a double sputtering technique. Then, a metal oxide electrode catalyst layer was formed by sputtering, the metal oxide including zirconium as the transition metal. An Au-ZrO_{2-x} electrode catalyst was thereby produced. The helium pressure during sputtering was set at 1×10^{-3} Pa or less. Au and stoichiometric zirconium oxide were used as sputtering targets.

[0034] Using a quartz oscillation-type film thickness meter, the amount of sputtering was measured. A zirconia oxide electrode with a zirconia oxide film thickness of about 30 nm was formed. The atomic compositional ratios between zirconium and oxygen at the surface and in the interior were identified by XPS. The results thereof are shown in Table 1 below.

[TABLE 1]

Element	Surface		Interior	
	O	Zr	O	Zr
Compositional ratio (%)	67.9	32.1	62.1	37.9

[0035] The atomic compositional ratios between Zr and O calculated from Table 1 were ZrO_{1.6} in the interior and ZrO_{2.1} at the surface. The interior composition corresponds to the composition during film formation by sputtering. The surface composition corresponds to the composition after electrochemical measurement, in which oxidation proceeds compared with the interior composition. Zr in the composition during film formation is in a less oxidized state, i.e., in a more oxygen-deficient state, than ZrO₂.

[0036] The catalytic activity of the resulting Au-ZrO_{2-x} electrode was evaluated in relation to an oxygen reduction reaction. The resulting electrode was polarized in a 0.1 mol/dm³ sulfuric acid solution at a reaction temperature of 30°C, at a potential under a nitrogen atmosphere and an oxygen atmosphere in the range of 0.05 to 1.2 V, at a potential-scanning rate of 1 mV/s, and evaluation was performed on the basis of current-potential curves. As a reference electrode, a reversible hydrogen electrode was used in a sulfuric acid solution with the same concentration. The current density was expressed in terms of geometric area. Fig. 4 shows the current-potential curve of the resulting Au-ZrO_{2-x} electrode in comparison with an Au only electrode and a ZrO_{2-x} electrode.

[0037] Under the oxygen atmosphere, the Au only electrode had low oxygen reduction activity and a reduction current was observed at about 0.5 V in the 0.1 mol/dm³ sulfuric acid solution. In the ZrO_{2-x} electrode, a reduction current flowed at about 0.9 V or higher. In comparison with the ZrO_{2-x} electrode, in the Au-ZrO_{2-x} electrode, a large reduction current was observed at 0.75 V or higher. It is evident that the oxygen reduction activity of the ZrO_{2-x} electrode was improved by the Au layer.

EXAMPLE 2

[0038] An Au-NbO_{5-x} electrode catalyst was produced under the same conditions as in Example 1 except that niobium was used as the transition metal. The catalytic activity of the resulting Au-NbO_{5-x} electrode was evaluated in relation to an oxygen reduction reaction under the same conditions as in Example 3. Fig. 5 shows the current-potential curve of the resulting Au-NbO_{5-x} electrode in comparison with an Au only electrode and a NbO_{5-x} electrode. It is evident that the oxygen reduction activity of the NbO_{5-x} electrode was improved by the Au layer.

EXAMPLE 3

[0039] An Au-SnO_{2-x} electrode catalyst was produced under the same conditions as in Example 1 except that tin was used as the transition metal. The catalytic activity of the resulting Au-SnO_{2-x} electrode was evaluated in relation to an oxygen reduction reaction under the same conditions as in Example 3. Fig. 6 shows the current-potential curve of the

resulting Au-SnO_{2-x} electrode in comparison with an Au only electrode and a SnO_{2-x} electrode. It is evident that the oxygen reduction activity of the SnO_{2-x} electrode was improved by the Au layer.

EXAMPLE 4

[0040] An Au-TiO_{2-x} electrode catalyst was produced under the same conditions as in Example 1 except that titanium was used as the transition metal. The catalytic activity of the resulting Au-TiO_{2-x} electrode was evaluated in relation to an oxygen reduction reaction under the same conditions as in Example 3. Fig. 7 shows the current-potential curve of the resulting Au-TiO_{2-x} electrode in comparison with an Au only electrode and a TiO_{2-x} electrode. It is evident that the oxygen reduction activity of the TiO_{2-x} electrode was improved by the Au layer.

EXAMPLE 5

[0041] An Au-VO_{5-x} electrode catalyst was produced under the same conditions as in Example 1 except that vanadium was used as the transition metal. The catalytic activity of the resulting Au-VO_{5-x} electrode was evaluated in relation to an oxygen reduction reaction under the same conditions as in Example 3. Fig. 8 shows the current-potential curve of the resulting Au-VO_{5-x} electrode in comparison with an Au only electrode and a VO_{5-x} electrode. It is evident that the oxygen reduction activity of the VO_{5-x} electrode was improved by the Au layer.

EXAMPLE 6

[0042] An Au-WO_{3-x} electrode catalyst was produced under the same conditions as in Example 1 except that tungsten was used as the transition metal. The catalytic activity of the resulting Au-WO_{3-x} electrode was evaluated in relation to an oxygen reduction reaction under the same conditions as in Example 3. Fig. 9 shows the current-potential curve of the resulting Au-WO_{3-x} electrode in comparison with an Au only electrode and a WO_{3-x} electrode. It is evident that the oxygen reduction activity of the WO_{3-x} electrode was improved by the Au layer. Industrial Applicability

[0043] Electrode catalysts for oxygen reduction according to the present invention are useful as electrode catalysts for electrochemical systems used in contact with acidic electrolytes in the fields of water electrolysis, inorganic/organic electrolysis, fuel cells, etc.

Brief Description of the Drawings

[0044]

Fig. 1 is a graph showing current-potential curves measured at a potential-scanning rate of 1 mV/s in an oxygen reduction reaction when ZrO_{2-x} layers, as a transition metal oxide, with various thicknesses were formed by sputtering on the surface of glassy carbon.

Fig. 2 is a graph showing the dependency of the electrode potential at -1 μACm⁻² on the thickness of ZrO_{2-x} layers measured at a potential-scanning rate of 1 mV/s.

Fig. 3 is a graph showing current-potential curves measured at a potential-scanning rate of 5 mV/s in an oxygen reduction reaction when a ZrO₂ layer was formed by sputtering with a thickness of 30 nm.

Fig. 4 is a graph evaluating the catalytic activity of an Au-ZrO_{2-x} electrode catalyst in an oxygen reduction reaction in Example 1.

Fig. 5 is a graph evaluating the catalytic activity of an Au-NbO_{5-x} electrode catalyst in an oxygen reduction reaction in Example 2.

Fig. 6 is a graph evaluating the catalytic activity of an Au-SnO_{2-x} electrode catalyst in an oxygen reduction reaction in Example 3.

Fig. 7 is a graph evaluating the catalytic activity of an Au-TiO_{2-x} electrode catalyst in an oxygen reduction reaction in Example 4.

Fig. 8 is a graph evaluating the catalytic activity of an Au-VO_{5-x} electrode catalyst in an oxygen reduction reaction in Example 5.

Fig. 9 is a graph evaluating the catalytic activity of an Au-WO_{3-x} electrode catalyst in an oxygen reduction reaction in Example 6.

Claims

1. A corrosion-resistant electrode catalyst for oxygen reduction comprising a main catalyst composed of at least one

EP 1 806 798 A1

transition metal oxide selected from oxygen-deficient ZrO_2 , Ta_2O_5 , Nb_2O_5 , SnO_2 , TiO_2 , V_2O_5 , MoO_3 , and WO_3 and a co-catalyst composed of gold, the electrode catalyst being used in contact with an acidic electrolyte at a potential at least 0.4 V higher than the reversible hydrogen electrode potential.

- 5
2. The corrosion-resistant electrode catalyst for oxygen reduction according to Claim 1, wherein the transition metal oxide in the form of fine particles and gold in the form of fine particles are dispersed on a catalyst carrier which is an electron conductive powder.
- 10
3. The corrosion-resistant electrode catalyst for oxygen reduction according to Claim 1, wherein fine particles including fine gold particles coated with the transition metal oxide are dispersed on a catalyst carrier which is an electron conductive powder.
- 15
4. The corrosion-resistant electrode catalyst for oxygen reduction according to any one of Claims 1 to 3, wherein the electrode catalyst is used as an oxygen electrode catalyst of a fuel cell which uses an acidic electrolyte.

20

25

30

35

40

45

50

55

FIG.1

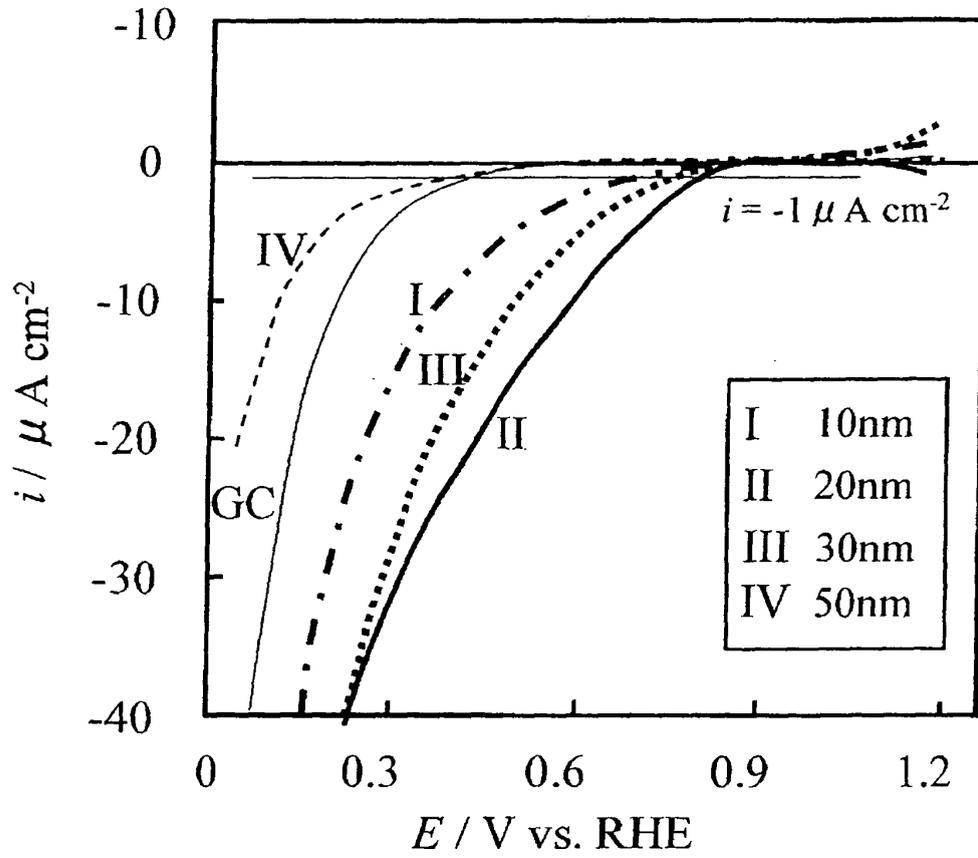


FIG.2

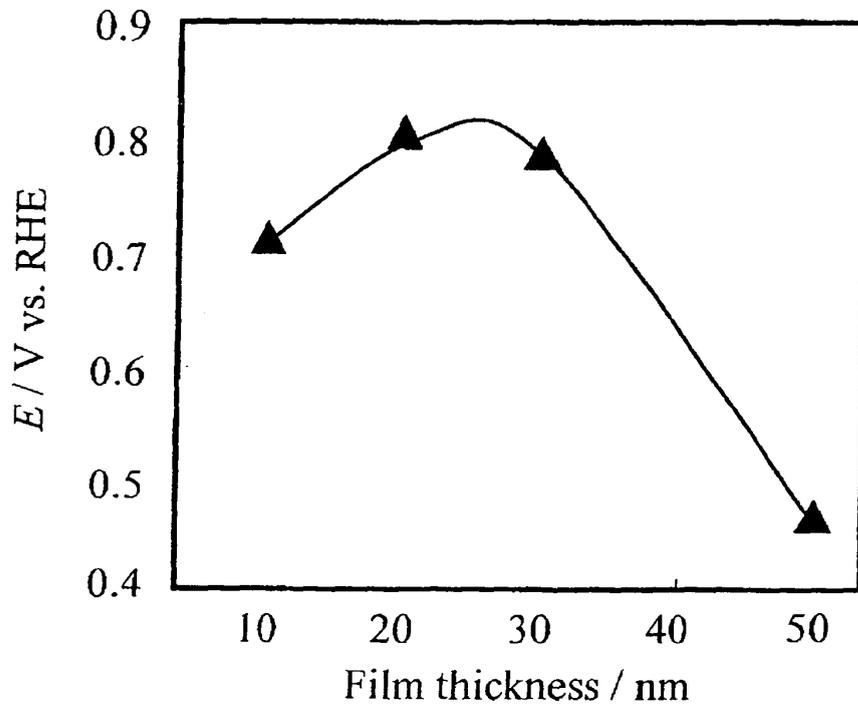


FIG. 3

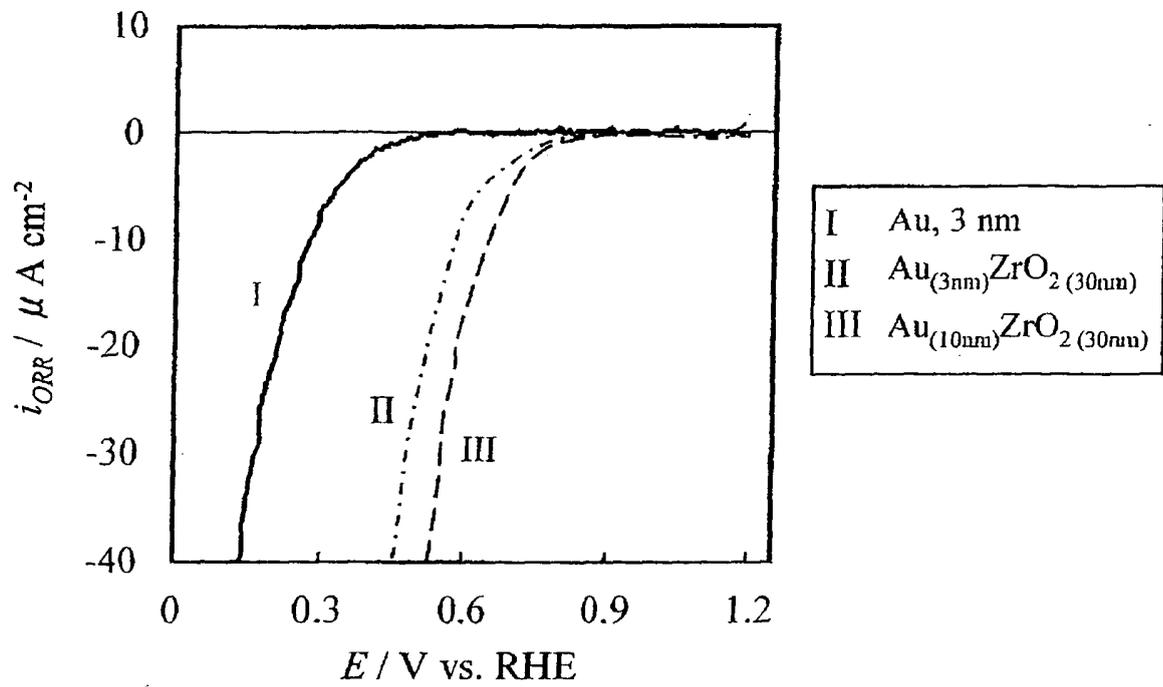


FIG. 4

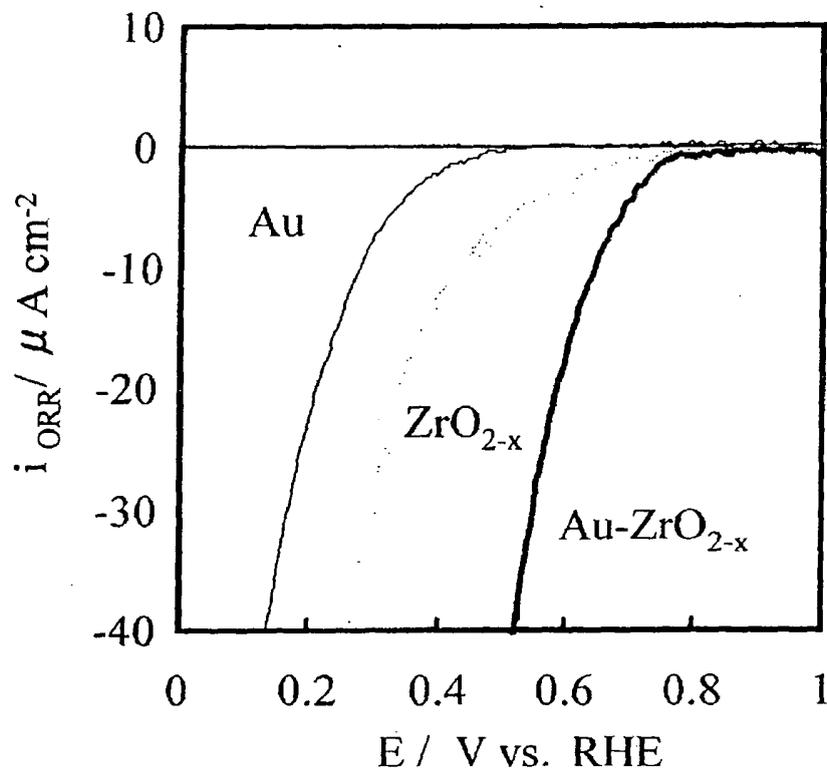


FIG. 5

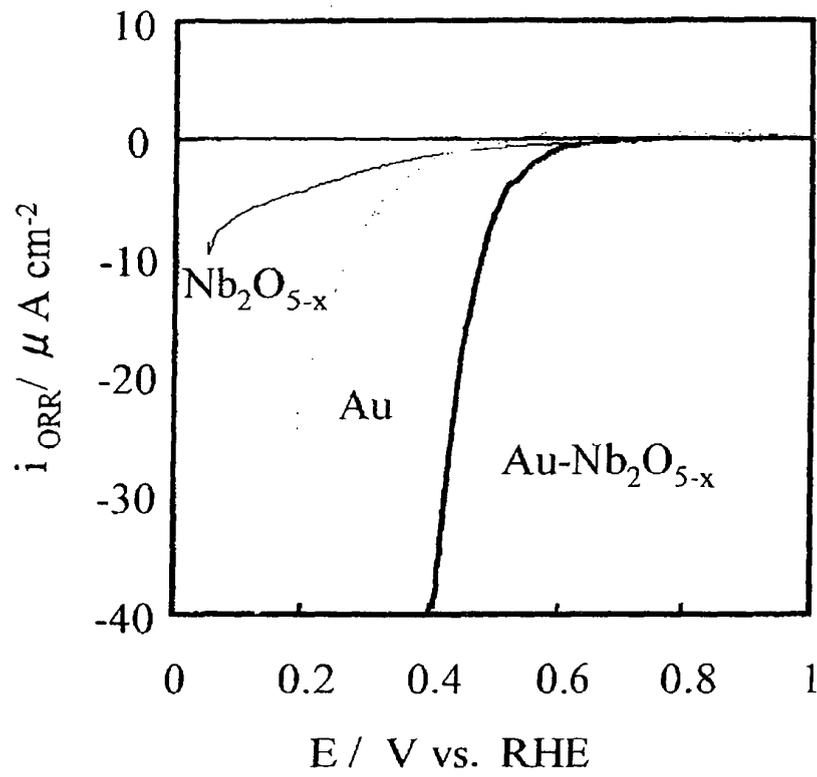


FIG. 6

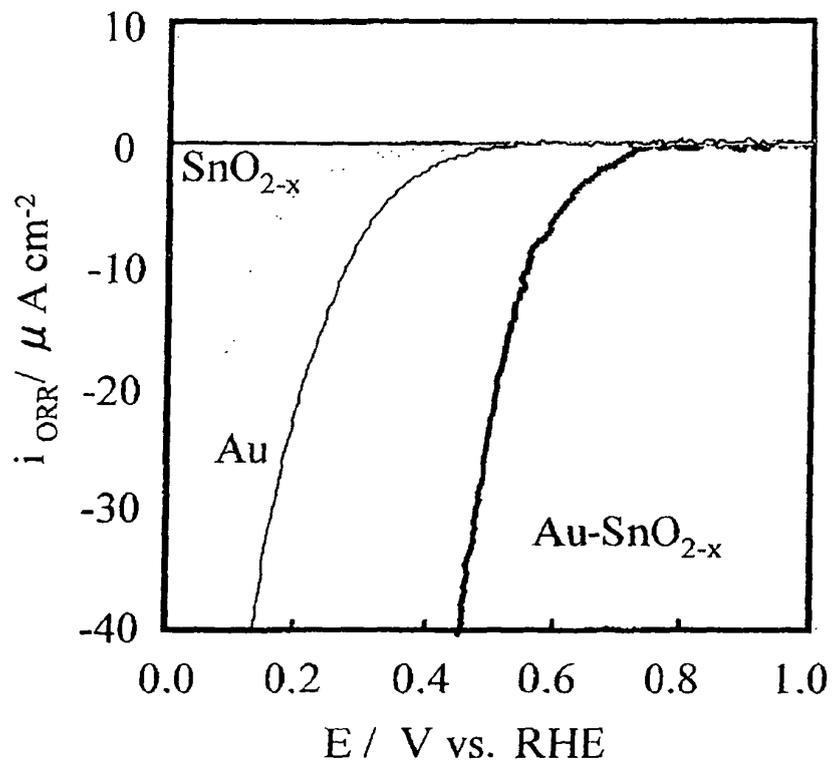


FIG. 7

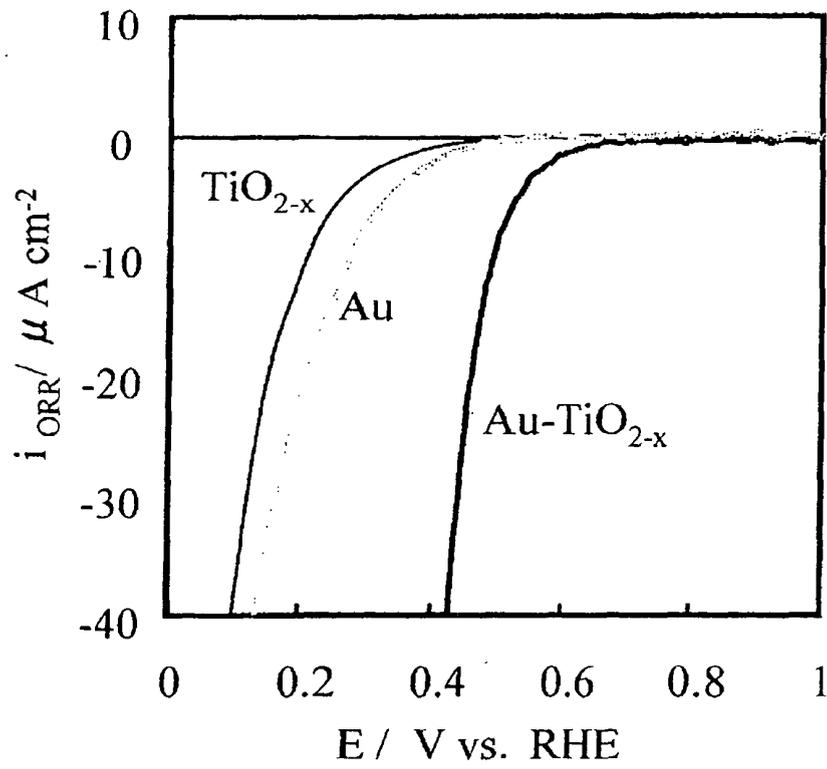


FIG. 8


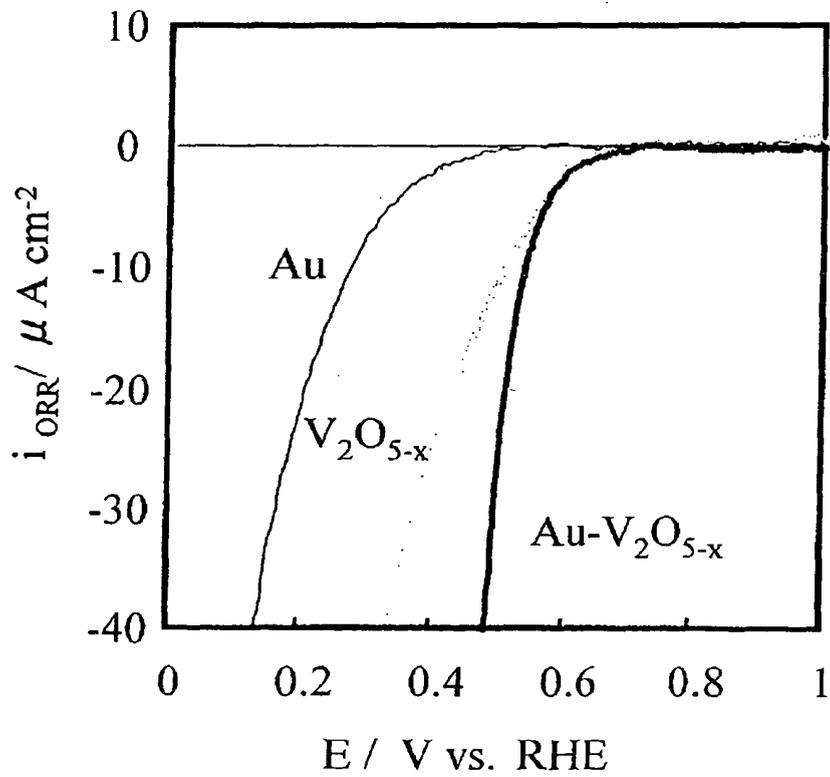


FIG. 9

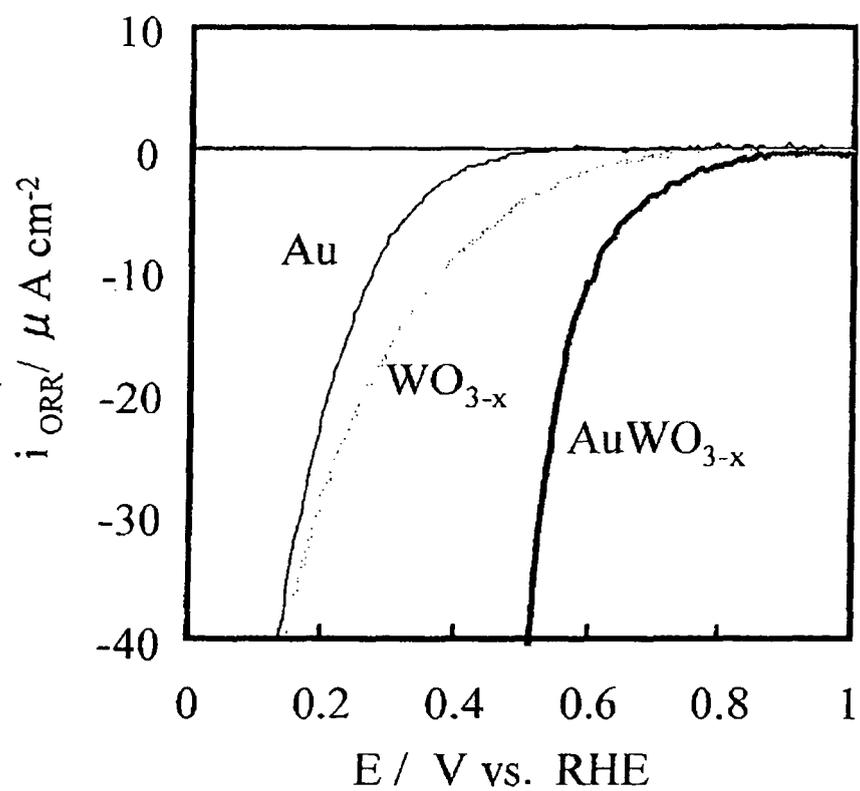

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2005/015052

A. CLASSIFICATION OF SUBJECT MATTER H01M4/90 (2006.01), H01M8/10 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H01M4/90 (2006.01), H01M8/10 (2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2005 Kokai Jitsuyo Shinan Koho 1971-2005 Toroku Jitsuyo Shinan Koho 1994-2005		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) JSTPlus (JOIS)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	Tetsufumi HORIBE, Akimitsu ISHIHARA, Shigetoku MITSUSHIMA, Ken'ichiro OTA, Nobuyuki KAMIYA, "Hakkin Issanka Tungsten Denkyoku ni okeru Sanso Kangen", The Electrochemical Society of Japan, Dai 69 Kai Taikai Koen Yoshishu, 25 March, 2002 (25.03.02), published by The Electrochemical Society of Japan, page 90, 3C11	1, 3-4 2
Y A	H.Kohler, W.Gopel, "Catalysis of the Oxygen Reduction on $W_{18}O_{49}$ Electrodes by OH^- Induced Surface State", J.Electrochem.Soc., Vol.139, No.11, November 1992, pages 3035 to 3042	1, 3-4 2
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		<input type="checkbox"/> See patent family annex.
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 11 November, 2005 (11.11.05)		Date of mailing of the international search report 22 November, 2005 (22.11.05)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2005/015052

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 47-8341 B1 (Matsushita Electric Industrial Co., Ltd.), 10 March, 1972 (10.03.72), (Family: none)	1-4
A	JP 6-235083 A (Permelec Electrode Ltd.; DE NORA PERMELEC SOCIETA PER AZIONI), 23 August, 1994 (23.08.94), & EP 0606051 A1	1-4
A	JP 2004-95263 A (Mitsubishi Heavy Industries, Ltd.), 25 March, 2004 (25.03.04), (Family: none)	1-4
P,A	JP 2004-303664 A (Japan Science and Technology Agency), 28 October, 2004 (28.10.04), (Family: none)	1-4
P,A	JP 2005-63677 A (Nitto Denko Corp.), 10 March, 2005 (10.03.05), (Family: none)	1-4
P,A	JP 2005-161203 A (Japan Science and Technology Agency), 23 June, 2005 (23.06.05), (Family: none)	1-4

Form PCT/ISA/210 (continuation of second sheet) (April 2005)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 9167620 A [0005]
- JP 7289903 A [0005]
- JP 2003200051 A [0005]
- JP 2004197130 A [0005]
- JP 2004095263 A [0005]
- JP 3252057 A [0005]
- JP 3149629 B [0005]
- US 20040058808 A [0005]
- JP 2001522122 W [0005]
- JP 2005063677 A [0005]

Non-patent literature cited in the description

- **J. SHIM et al.** *J. Power Sources*, 2001, vol. 102, 172 [0005]
- **A. KATAYAMA.** *J. Phys. Chem.*, 1980, vol. 84, 376 [0005]
- **HIROSHI YONEYAMA et al.** *Denkikagaku*, 1973, vol. 41, 719 [0006]