



(11) **EP 1 296 173 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
13.06.2012 Bulletin 2012/24

(21) Application number: **01945723.3**

(22) Date of filing: **29.06.2001**

(51) Int Cl.:
G06F 3/01 (2006.01) H04N 13/04 (2006.01)

(86) International application number:
PCT/JP2001/005656

(87) International publication number:
WO 2002/003124 (10.01.2002 Gazette 2002/02)

(54) **MULTIPLE SHARING TYPE DISPLAY DEVICE**

ANZEIGEVORRICHTUNG MIT VIELFACHER BENUTZUNG

DISPOSITIF D’AFFICHAGE DU TYPE A PARTAGE MULTIPLE

(84) Designated Contracting States:
BE DE FR GB

(30) Priority: **30.06.2000 JP 2000199240**

(43) Date of publication of application:
26.03.2003 Bulletin 2003/13

(73) Proprietor: **Japan Science and Technology Corporation**
Kawaguchi-shi,
Saitama 332-0012 (JP)

(72) Inventors:
• **KITAMURA, Yoshifumi**
Suita-shi, Osaka 565-0821 (JP)
• **KISHINO, Fumio**
Toyonaka-shi, Osaka 560-0002 (JP)
• **MASAKI, Toshihiro**
Takarazuka-shi, Hyogo 665-0063 (JP)
• **KONISHI, Takashige**
Kobe-shi, Hyogo 652-0807 (JP)

(74) Representative: **Hofer, Dorothea et al**
Prüfer & Partner GbR
Patentanwälte
Sohnckestrasse 12
81479 München (DE)

(56) References cited:
EP-A- 0 899 969 EP-A2- 0 899 969
JP-A- 8 340 556 JP-A- 10 260 377
US-A- 5 521 724 US-A- 5 855 425
US-A- 5 855 425

- **TSUTOMU MIYASATO ET AL.: 'Fukusuunin-you dokuritsu rittai eizou hyouji no kentou' 1997NEN DENSHI JOUHO TSUUSHIN GAKKAI SOUGOU TAIKAI KOEN RONBUNSHUU no. PART 1, 06 March 1997, page 393, XP002946698**
- **YOSHIFUMI KITAMURA: '3 Jigen display ni yoru interaction' 3D EIZOU vol. 15, no. 1, 24 March 2001, pages 33 - 41, XP002946699**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 296 173 B1

Description**TECHNOLOGICAL FIELD**

5 [0001] The present invention relates to a display device. In particular, it is related to display device allowing a plurality of users to share a common display device.

BACKGROUND TECHNOLOGY

10 [0002] In recent years, computers and the environment surrounding computers has been rapidly expanding. Together with such expansion, technology using computers is widely used and has become commonplace so that these days computers can be seen in every aspect of our daily lives.

15 [0003] Within this expansion of the environment surrounding computers, technology related to virtual reality is also expanding. The increasing speed of computers has made it possible to bring the construction of complicated virtual environments to even greater heights. Currently, this virtual reality technology has come to be used in various fields, and objects realized in virtual worlds are wide-ranging from large' scale to small scale and high definition, such as outer space, metropolitan areas, environments in nature, manufactured products, internal organs, small animals, cells, and atoms. Moreover, not only is it being used for that which actually exists and can be actually seen, but also it is being used to visualize temperature distribution, airflow, and electromagnetic fields, which cannot actually be seen.

20 [0004] Amazing expansion has been attained in three-dimensional image display technology used to achieve such virtual reality, and utilization thereof ranging from installations at expositions or use for amusement purposes, to applications in the fields of education and medicine and applications in the various design, CAD/CAM, and measurement fields deserves our attention.

25 [0005] Techniques of displaying three-dimensional images are generally classified into a technique where a stereoscopic image is formed using an appropriate method and having the viewer of such image view it without assistance, and a binocular disparity technique devised so that, instead of a stereoscopic image, a right-eye view and a left-eye view of a flat image is formed and the right-eye view is viewed by the right eye and the left-eye view is viewed by the left eye. Typical examples of the former include holography and integral photography, and the latter includes three-dimensional movies where polarized glasses or liquid crystal shutters are used, and three-dimensional television using lenticular film.

30 [0006] These techniques of forming three-dimensional images, as typified by holography, still have unresolved technical issues preventing full color, high resolution, and real time viewing.

35 [0007] The binocular disparity technique is based on ergonomics, and provides three-dimensional images giving an enhanced 'real' feeling, and superior immersion and sensory feelings. However, it is not possible to freely change the viewpoint from which the three-dimensional object shown is viewed to coordinate with the user's movements using this technique by itself.

40 [0008] A method which modifies the three-dimensional image in accordance with the viewpoint and position of the viewer, a device (e.g., magnetic sensors or the like) worn for measuring the position of the head (viewpoint) of the viewer plus the binocular disparity technique allows the three-dimensional image to be viewed relative to the viewpoint position. However, with this technique, the number of users for which viewpoint movement within real-space can be reflected in the virtual world is limited to one person for each display. There is no display method appropriate for a plurality of viewpoints when a plurality of users shares a common display.

45 [0009] There are methods of performing time divided display for the number of users (for example, refer to MIYASATO, Tsutomu, et al., General Conference of the Institute of Electronics Information and Communication Engineers, A 16-21, 1997, or Japanese Patent Application Laid-open Hei 10-260377) and methods of driving display devices corresponding to the number of users in response to viewpoint position (for example, refer to KIMURA, Katsuyuki, et al., Conference on Three-Dimensional Imaging, 5-7, 1994). However, with the former, as the number of viewers increases, the allowable lower frequency limit of the composition of the three-dimensional view is not reached (the number of frames decreases), the display frequency is in inverse proportion to the number of users, which cause problems such as flickers to occur. With the latter, the number of display devices matching the number of users or a large-scale device is required, which is problematic in terms of price.

50 [0010] Thus, conventional devices for three-dimensional display of images and video have primarily come to use methods which display video for the right eye and video for the left eye using time division, and viewing is performed by putting on special glasses which open/close windows for the right and left eyes synchronous with the timing of this switching. In this case, the viewer is able to view the video via a screen from any position without distortion caused by that viewpoint positioning.

55 [0011] However, if a plurality of people try to view the same three-dimensional video without distortion, since the display switches back and forth between the right eye and left eye video of a plurality of positions, the time interval

between displaying an image for each person that has increased the number of time divisions becomes longer, causing a flicker to be sensed.

[0012] EP 0 899 969 A2 describes a three-dimensional image reconstructing apparatus for reconstructing a three-dimensional image and permitting the three-dimensional image to be observed at an observation position by use of an image display for displaying image information, a space optical modulator for forming a fine aperture, an optical system disposed near the space optical modulator, and a controller for controlling the image display and the space optical modulator so that some rays outgoing through the fine aperture of the space optical modulator and the optical system out of rays from the image information displayed on the image display pass a predetermined point in a three-dimensional space within a fixed period, wherein a distance between two closest rays passing the predetermined point and reaching the observation position is determined based on a diameter of a pupil of an observer. In one embodiment, a pinhole panel serves for forming a fine aperture. The pinhole panel is composed of a space optical modulator (spatial light modulating means) of a transmission type, which is, for example, a liquid crystal display capable of electronically changing the transmittance at an arbitrary position to form an optical pinhole. The pinhole moves at high speed and in constant period over the entire area of the pinhole panel 3.

[0013] US 5,855,425 describes a stereoscopic display in which a left eye image is projected from a first projector, and a right eye image is projected from a second projector. The images projected from the projectors pass through a plurality of light transmitting portions in a light shading means. Consequently, pairs of right and left eye images are formed in a vertical stripe shape on a dispersion panel. Each of the pairs of right and left eye images formed on the dispersion panel is introduced into the right and left eyes of a viewer upon being separated by a parallax barrier used as a separating means. A sensor detects the position of the viewer. A driving and control unit changes the positions of the light transmitting portions in the light shading means on the basis of an output of the sensor.

DISCLOSURE OF INVENTION

[0014] An object of the present invention is to provide a multi-person shared display device capable of displaying in response to viewpoint movement in real space. Another object of the present invention is to provide a multi-person shared display device capable of displaying a three dimensional image.

[0015] The object is attained by a multi-person shared display device according to claim 1. Further developments of the invention are specified in the dependent claims, respectively.

[0016] The proposed multi-person shared display device uses a display mask in which a hole is formed and covers the display device so as to hide portions besides the hole, allowing different display regions upon the display device to be set in accordance with the viewpoint position within real space of each user. This makes it possible to perform display in response to viewpoint movements of a plurality of users.

BRIEF DESCRIPTION OF DRAWINGS

[0017]

FIG 1 is a diagram showing a configuration of an embodiment of the present invention.

FIG 2 is a diagram showing an example of a display according to an embodiment of the present invention.

FIG 3 is a diagram showing an example of an image produced by this embodiment.

FIG 4 is a diagram showing an example of coordinates in the case where viewpoint is calculated.

FIG 5 is a diagram showing the relationship between the display surface and a virtual object.

FIG 6 is a diagram showing how a coordinate axis is determined.

FIG 7 is a diagram showing display area for the viewpoint of a user.

FIG 8 is a diagram showing an embodiment of a theatre display device.

FIG 9 is a diagram showing a configuration applied to entertainment purposes.

FIG 10 is a diagram showing an example where information is displayed.

BEST MODE FOR CARRYING OUT THE INVENTION

[0018] Embodiments of the present invention are described forthwith while referencing the drawings.

[0019] To begin with, an example where a three-dimensional image is shown with a multi-person shared three-dimensional display device is described.

[0020] FIG 1(a) is a diagram showing a configuration of a multi-person shared three-dimensional display device according to an embodiment of the present invention. In FIG 1(a), two users 140 and 150 of a multi-person shared three-dimensional display device each have on liquid crystal shutter glasses 142, 152, respectively, and also have a respective position sensor 144, 154 attached. The users view an image displayed upon a display screen 110 via the liquid crystal

shutters. The liquid crystal shutter glasses 142, 152, position sensors 144, 154, and display device 110 are connected to a processing device 130. In conformity with the input from the position sensors, the processing apparatus 130 displays an image upon the display at a region corresponding to each respective user.

5 [0021] The display device 110, as shown in FIG 1(b), is configured from a display 112 and a display mask 114, which covers and hides a portion thereof. The display mask 114 is set at a position separated only an appropriate distance away from a display surface 116. A hole 118 is formed in the display mask 114, and through only that portion can the surface 116 of the display 112 be seen.

10 [0022] By introducing such a display mask 114, as shown in FIG 2, the viewable region upon the display surface varies depending on the viewpoint position of the user. As a result, it becomes possible to vary the contents exhibited to each user. In addition, with this configuration, it becomes possible to coordinate with the interactive viewpoint movement of a user. In the case where the viewpoint position of a user moves, the region viewable by the user also changes depending on that movement. Accordingly, by detecting viewpoint position using the position sensor and displaying at a region befitting that viewpoint position, it is possible to adapt to the movement of the viewpoint position of the user.

15 [0023] Moreover, with a system using this technique, by presenting an image having disparity between the respective right and left viewpoint for every display region and for every viewpoint position, it becomes possible to perform three-dimensional display for all viewers. As a result, a multi-person shared three-dimensional virtual space can be realized as three-dimensional display is being performed for all viewers in the same virtual space.

20 [0024] For example, a magnetic sensor having 6 degrees of freedom can be used as the viewpoint position detection sensor. The magnetic sensor can detect the current position by detecting magnetic flux cutoff in every respective direction x, y, and z. Assuming that the direction of the line of sight faces the center of the hole upon the mask and that a line connecting both eyes parallels the horizontal surface, that direction of the line of sight can be calculated in real time from the viewpoint position detected.

25 [0025] Besides the magnetic sensor utilizing a magnetic field as described above, it is also possible to use any well known sensor utilizing an electric field, an electromagnetic field, ultrasonic waves, or the like, as the position detection sensor. In addition, the position detection sensor may be constructed integrated in the liquid crystal shutter glasses.

30 [0026] The processing device 130 is provided comprising projecting an image for the respective right and left viewpoint derived and time-divided, alternating displaying upon a display 112 synchronous to the liquid crystal shutters. Actually, as shown in FIGs 3(a) and (b), outputting images corresponding to the respective right and left viewpoints to the respective upper and lower half of the entire screen and switching between the respective top and bottom half thereof, this system displays enlargement thereof. This allows, for example, a display frequency of 120 Hz to be divided into 60 Hz to show the right and left images. The liquid crystal shutters switch between both right and left, viewable and non-viewable, by synchronizing with the image refresh rate. The fact that the display 112 is viewed through the liquid crystal shutter glasses makes it possible to obtain images that correspond to the respective right and left viewpoints, thereby allowing three-dimensional viewing.

35 [0027] In the above description, the top and lower halves are output one at a time; however, in what manner division and display are carried out, or whether display is carried out without division, or if display is accomplished through interlacing or so forth, can be freely set. Further, besides a display device that provides a normal light-emitting surface to be directly viewed, a projector type display device may also be used.

40 <Viewpoint Position>

45 [0028] Next, using FIG 4, how the position of both the left and right eye is calculated so as to perform three-dimensional display is described; where that position is derived, assuming the viewpoint position obtained using the positional sensor to be equal to the center of the eyes, based on the direction of the line of sight and the attitude angle derived from calculations. As shown in FIG 4, the center position of the user's eyes and the distance from the center to both of the respective eyes, the rotational angle of the light of sight from the straight forward direction, along with the position of both respective eyes are defined as the following:

50

55

- $(x_{eye}, y_{eye}, z_{eye})$: center position between both eyes
 5 d_{eye} : distance to both respective right and left eyes
 \square : rotational angle of the line of sight from the
 10 straight forward direction
 $(x_{l-eye}, y_{l-eye}, z_{l-eye})$: position of left eye
 $(x_{r-eye}, y_{r-eye}, z_{r-eye})$: position of right eye (1)

[0029] When defined as in (1) above, the right and left viewpoint positions can be derived as the following equations (2):

$$x_{l-eye} = x_{eye} - d_{eye} \cos \square$$

$$y_{l-eye} = y_{eye} - d_{eye} \sin \square$$

$$z_{l-eye} = z_{eye}$$

$$x_{r-eye} = x_{eye} + d_{eye} \cos \square$$

$$y_{r-eye} = y_{eye} + d_{eye} \sin \square$$

$$z_{r-eye} = z_{eye} \quad (2)$$

[0030] In this case, if the positional sensor is constructed integrated with glasses incorporating liquid crystal shutters, error is especially small, and it is possible to calculate the viewpoint position from the positional information obtained by the positional sensor, as described above.

<Setting of Projection Surface>

[0031] When movement of the viewpoint position is considered, it becomes necessary to set the position of the projection surface so that it is capable of handling the positional relationship of the viewpoint and the display surface. The method where the projection surface and the display surface are made to match can be used as a most basic method of appropriately setting the projection surface. With this method, in the case where the absolute position of the display surface within the real world is invariant, the absolute position of the projection surface within the virtual world is also invariant, there is no need to consider correction of the absolute position of the projection surface, and it becomes acceptable to consider only the relative position from the viewpoint.

[0032] In addition, when the position of a virtual object assumed to exist lies on the other side of the viewpoint relative to the display surface in real space, in other words, in the case where the display surface is thought of as a window and one is peering into the virtual world through the window, the projection surface should be set to match the display surface in the simplistic manner described next.

[0033] However, generally, in the system for rendering the virtual world, since the virtual world in front of the projection surface relative to the viewpoint is impossible to render, in cases where a virtual object exists on the side in front of the display surface relative to the user, it is not appropriate to set the projection surface to match the display surface.

[0034] Therefore, with the system of this embodiment, as shown in FIG 5(a), assuming the rectangular area, which has four apexes that match each respective intersection of the four straight lines connecting each respective four nodes

of a display surface 116 to the viewpoint and a plane at the rear of which the virtual object 520 exists parallel to the display surface 116 to be a projection surface 510, the projected image is enlarged and displayed upon the display surface 116 providing appropriate presentation of an image. It is noted that in the case where such a method is used, since the absolute position itself of the projection surface 510 changes, it is necessary to derive the absolute position of the projection surface 510 for every change in viewpoint position.

[0035] FIG 5(b) shows an example of a display screen in the case where a relationship among the projection surface, the display surface, and the virtual object such as that shown in FIG 5(a) is assumed. If a relationship such as that shown in FIG 5(a) is assumed, that which is to be shown upon the display surface 116 in the real world is an enlarged image.

[0036] In this manner, with the system of this embodiment, it is possible to freely set the relationship between the display surface and the projection surface. This makes it possible to display a virtual object by setting the projection surface without being limited to the actual display surface.

<Derivation of Display Region and Display>

[0037] A display region corresponding to the viewpoint position of the user is derived and image rendering is performed in that region. On this occasion, when the hole 118 upon display mask 114 is circular, the display region corresponding to the position of the user viewpoint is also circular, and the position of the center thereof is determined in conformity with the following two parameters.

- Position of the viewpoint upon the display coordinate system
- Distance between the mask and the display surface

[0038] It is noted that with the system of this embodiment, the distance between the mask 114 and the display surface 116 is fixed.

[0039] The center of the display surface 116 is made the origin, the coordinate system having the center of display surface 116 as the origin is set as shown in FIG 6, with the viewpoint upon that coordinate system, the distance between the mask and the display surface, and the position of the center of the display region being defined as the following:

(x_{eye} , y_{eye} , z_{eye}) : viewpoint position
 $d_{mask-display}$ distance between mask and display surface
 (x_{center} , y_{center} , z_{center}) : center position of display region

[0040] Based on the above-mentioned definitions, as shown in FIG 7(a), the center position of a display region 242 is derived from the following relational expression:

$$x_{center} = -x_{eye} \times \frac{d_{mask-display}}{z_{eye} - d_{mask-display}}$$

$$y_{center} = -y_{eye} \times \frac{d_{mask-display}}{z_{eye} - d_{mask-display}}$$

$$z_{center} = 0$$

(3)

[0041] In addition, as shown in FIG 7(b) the radius defining the magnitude of the circular display region 242, is derived from the following three parameters:

- distance of the viewpoint from the display surface
- distance between the mask and the display surface
- radius of the hole upon the mask

[0042] Here the radius of the hole 118 upon the mask 114 and the radius of the display region 242 are respectively defined as the following:

r_{hole} : radius of the hole on the mask

r_{draw} : radius of the display region

[0043] In this case, the radius r_{draw} of the display region is represented by the following:

$$r_{\text{draw}} = r_{\text{hole}} \times \frac{z_{\text{eye}}}{z_{\text{eye}} - d_{\text{mask-display}}}$$

[0044] By performing processing of the display region in the above manner, it is possible to perform display of an image for every user in the display region 242 that is dynamically derived in accordance with the position of the respective user.

<Detection of Overlapping Display Regions>

[0045] Since there is a plurality of users, it is necessary to perform an overlapping search among regions derived in conformity with the processing described above. In the case where the display region is circular, detection of an overlapping region can be performed through the relationship of the distance between centers and the sum of the radiuses. With a system of this embodiment, when overlapping is detected, the users can be alerted to an overlapping display region through, for example, the rendering of a demarcation line for the display region.

[0046] With the system of this embodiment, for example, the display has a rectangular shape with a width of 1360 mm and height of 1020 mm, and from the surface of the floor the height of the display surface is 1000 mm. The distance between the display mask and the display surface is 150 mm and the radius of the mask hole is 200 mm.

<Other Embodiments>

[0047] The system of the embodiment described above is an example where the display surface is placed horizontally; alternatively, the display surface may naturally be placed vertically or at a slant. If the display is made to be the projection type, it is possible to achieve a large screen display. In addition, in order to configure a large display, a plurality of displays may be combined.

[0048] FIG 8 shows a theatre-style multi-person shared three-dimensional display device capable of being used by multiple persons. With the theatre style multi-person shared three-dimensional display device, for example, given a width of 25 m, height of 18 m, distance of 6 m between the display mask and the display surface, radius of 0.5 m for the mask hole of the display mask, a maximum of forty-eight persons can simultaneously view the respective videos.

[0049] It is not necessary to make the hole upon the display mask circular; for example, a rectangular shape is also allowable.

[0050] If the display mask is configured with liquid crystal, it is possible to control the radius, shape, and location of the hole of the display mask through the permeability and non-permeability of the liquid crystal.

[0051] In addition, in order to control the radius, etc. of the hole of the display mask, for example, a mechanical mechanism such as an aperture mechanism or the like can be used.

[0052] With the multi-person shared three-dimensional display apparatus described above, glasses with attached shutters are utilized wherein the opening and closing of the shutters is synchronized and images corresponding to the left/right line of sight are displayed to obtain a three-dimensional image; however, the present invention is not limited to this method for obtaining a three-dimensional view. For example, a filter based on polarization or color may be used as the glasses to be worn to segregate images corresponding to the left and right lines of sight.

[0053] In addition, as an example of three-dimensional display not using glasses, there is the display device mentioned in, for example, Japanese Patent Application Laid-open No. 2001-13457.

[0054] It is possible to use these multi-person shared three-dimensional display devices, for example, for entertainment purposes. A configuration example corresponding to such entertainment purposes is shown in FIG 9. In FIG 9(a), audience members traveling aboard carts 421, 422, and 423, respectively, view a display 416 via a hole 418 in display mask 414. FIG 9(b) shows a configuration where a three-dimensional image displayed on a display 516 is viewed through a hole 518 in a display mask 514 while a plurality of audience members are moving about a central stage.

[0055] When the fact that display on a display surface is possible by separating images for every person with a display hole is utilized, not only images for three-dimensional viewing, but also display of different information for each person is possible. An example of this configuration is shown in FIG 10. This configuration, as shown in FIG 10, is a fundamentally similar configuration as the multi-person shared three-dimensional display device shown in FIG 1. With this configuration,

sensors 162, 164, 166 are attached to each audience member and the respective position of each audience member is detected through a processing device 130. The processing device 130, in conformity with the detected positions, performs display corresponding to each person on the display regions 224, 226, 228 respectively associated with each audience member.

5 **[0056]** With the multi-person shared display device of the present invention, it is possible to perform appropriate display corresponding to viewpoint movement for a plurality of persons.

[0057] With this multi-person shared display device, the relative positions between the viewpoint and projection surface in the virtual world are appropriately corrected corresponding to changes in the relative positions between the viewpoint and projection surface in the real world. Moreover, with the present invention, for example with a single fixed display, a three-dimensional image can be displayed for a plurality of moving users having neither flickering nor spatial distortion. In addition, regions of viewpoint movement allowing a user to obtain an appropriate image have also been described in detail.

[0058] The present invention is applicable to not only a stand-alone computer system, but may also be made applicable to, for example, a client server system or the like configured from a plurality of systems.

15 **[0059]** It is possible to provide a configuration of the present invention by having a system read out a program relating to the present invention from storage media stored with the program and execute it. Such storage media includes floppy disks, CD-ROMS, magnetic tape, and ROM cassettes.

INDUSTRIAL APPLICABILITY

20 **[0060]** With the display device of the present invention, an image rendered upon a screen in compliance with the individual audience member positions is viewed via a hole of an appropriate size an appropriate distance from the screen. As a result, it is possible to view video in compliance with the individual viewpoint positions of a plurality of persons.

25 **[0061]** Technology relating to such a multi-person shared display device is capable of wide range industrial applicability, for example as a device for viewing three-dimensional objects.

Claims

30 1. A multi-person shared display device (110), which is a display device suitable to be shared by a plurality of users, comprising:

a display device (112), which displays a plurality of images for a plurality of users (140, 150) on a common display surface (116);

35 a display mask (114), which is disposed so as to cover said display surface (116) and which is separated from said display surface (116) by a fixed distance and has a hole (118) so that the display mask (114) hides portions beside the hole (118);

a viewpoint position detecting sensor (144, 154) which detects a viewpoint position of a user (140, 150) in real space relative to said display device (112); and

40 a processing device (130) which is dynamically combined with said one display device (112) and said viewpoint position detecting sensor (144, 154) and which renders an image corresponding to each user's (140, 150) viewpoint position and displays the image on the user's (140, 150) corresponding display region (242) of said display surface (116) in accordance with said viewpoint position of the user (140, 150) that has been detected by said viewpoint position detecting sensor (144, 154),

45 **characterized in that**

the hole (118) provided in the display mask (114) is the only portion through which the display surface (116) of the display device (112) can be seen, whereby the viewable display region (242) on the display surface (116) varies depending on the viewpoint position of the user (140, 150),

50 the processing device (130) derives the display region (242) corresponding to the viewpoint of the user (140, 150) and performs image rendering for that region, and

the hole (118) is sufficiently large to enable each user (140, 150) to entirely see that user's (140, 150) corresponding display region (242) on the display surface (116).

55 2. The multi-person shared display device (110) according to Claim 1, wherein said image to be displayed upon the display surface (116) includes video for three-dimensional viewing.

3. The multi-person shared display device (110) according to Claim 2, wherein

each user (140, 150) wears glasses (142, 152) for separating said video for three-dimensional viewing displayed upon the display surface (116) into that for the right eye and that for the left eye; and the plurality of video for three dimensional viewing shown on said display surface (116) are images allowing separation between that for the right eye and that for the left eye through said glasses (142, 152).

- 5
4. The multi-person shared display device (110) according to Claim 3, wherein said glasses (142, 152) are glasses in which shutters for the right eye and for the left eye open and close; and said processing device (130) is dynamically combined with said glasses (142, 152).
- 10
5. The multi-person shared display device (110) according to either Claim 3 or Claim 4, wherein said glasses (142, 152) and said viewpoint position detecting sensor (144, 154) are formed as an integral unit.

15

Patentansprüche

- 20
1. Mehrpersonennutzungsanzeigevorrichtung (110), die eine Anzeigevorrichtung ist, die geeignet ist, von einer Mehrzahl von Benutzern gemeinsam genutzt zu werden, mit einer Anzeigevorrichtung (112), die eine Mehrzahl von Bildern für eine Mehrzahl von Benutzern (140, 150) auf einer gemeinsamen Anzeigefläche (116) anzeigt,
- 25
- einer Anzeigemaske (114), die so angeordnet ist, dass sie die Anzeigefläche (116) bedeckt, und die von der Anzeigefläche (116) durch einen festen Abstand getrennt ist und ein Loch (118) aufweist, so dass die Anzeigemaske (114) Abschnitte neben dem Loch (118) verdeckt,
- 30
- einem Sichtpunktserfassungssensor (144, 154), der eine Sichtpunktserfassung eines Benutzers (140, 150) in einem realen Raum relativ zu der Anzeigevorrichtung (112) erfasst, und
- 35
- einer Verarbeitungsvorrichtung (130), die dynamisch mit der einen Anzeigevorrichtung (112) und dem Sichtpunktserfassungssensor (144, 154) kombiniert ist und die ein Bild entsprechend der Sichtpunktserfassung jedes Benutzers (140, 150) rendert und das Bild auf einem dem Benutzer (140, 150) entsprechenden Anzeigebereich (242) der Anzeigefläche (116) entsprechend der Sichtpunktserfassung des Benutzers (140, 150), die durch den Sichtpunktserfassungssensor (144, 154) erfasst wurde, anzeigt,
- 40
- dadurch gekennzeichnet, dass**
- das Loch (118), das in der Anzeigemaske (114) angeordnet ist, der einzige Abschnitt ist, durch den die Anzeigefläche (116) der Anzeigevorrichtung (112) zu sehen ist, wodurch der sichtbare Anzeigebereich (242) auf der Anzeigefläche (116) sich in Abhängigkeit von der Sichtpunktserfassung des Benutzers (140, 150) ändert,
- 45
- die Verarbeitungsvorrichtung (130) den Anzeigebereich (242), der dem Sichtpunkt des Benutzers (140, 150) entspricht, ableitet und das Rendern des Bildes für diesen Bereich durchführt, und
- 50
- das Loch (118) hinreichend groß ist, um es jedem Benutzer (140, 150) zu ermöglichen, den diesem Benutzer (140, 150) entsprechenden Anzeigebereich (242) auf der Anzeigefläche (116) ganz zu sehen.
- 55
2. Mehrpersonennutzungsanzeigevorrichtung (110) gemäß Anspruch 1, bei der das auf der Anzeigefläche (116) anzuzeigende Bild ein Video für dreidimensionales Sehen aufweist.
3. Mehrpersonennutzungsanzeigevorrichtung (110) gemäß Anspruch 2, bei der jeder Benutzer (140, 150) eine Brille (142, 152) trägt zum Trennen des auf der Anzeigefläche (116) angezeigten Videos für dreidimensionales Sehen in das für das rechte Auge und das für das linke Auge und die Mehrzahl der auf der Anzeigefläche (116) angezeigten Videos für dreidimensionales Sehen Bilder sind, die eine Trennung zwischen dem für das rechte Auge und dem für das linke Auge durch die Brille (142, 152) ermöglichen.
4. Mehrpersonennutzungsanzeigevorrichtung (110) gemäß Anspruch 3, bei der die Brille (142, 152) eine Brille ist, bei der sich Verschlüsse für das rechte Auge und für das linke Auge öffnen und schließen, und die Verarbeitungsvorrichtung (130) dynamisch mit der Brille (142, 152) kombiniert ist.
5. Mehrpersonennutzungsanzeigevorrichtung (110) gemäß Anspruch 3 oder 4, bei der die Brille (142, 152) und der Sichtpunktserfassungssensor (144, 154) als integrale Einheit gebildet sind.

Revendications

1. Dispositif d'affichage à partage multiple (110), qui est un dispositif d'affichage convenant à un partage par une pluralité d'utilisateurs, comprenant :

5 un dispositif d'affichage (112) qui affiche une pluralité d'images pour une pluralité d'utilisateurs (140, 150) sur une surface d'affichage commune (116) ; un masque d'affichage (114) qui est disposé de manière à couvrir ladite surface d'affichage (116) et qui est séparé de ladite surface d'affichage (116) d'une distance fixe et présente un trou (118) de sorte que le masque d'affichage (114) dissimule des parties en dehors du trou (118) ; un capteur de détection de position de point de vue (144, 154) qui détecte une position de point de vue d'un utilisateur (140, 150) dans un espace réel par rapport audit dispositif d'affichage (112) ; et un dispositif de traitement (130) qui est en combinaison dynamique avec ledit un dispositif d'affichage (112) et ledit capteur de détection de position de point de vue (144, 154) et qui donne une image correspondant à la position de point de vue de chaque utilisateur (140, 150) et affiche l'image sur la région d'affichage (242) correspondant aux utilisateurs (140, 150) de ladite surface d'affichage (116) selon ladite position de point de vue de l'utilisateur (140, 150) qui a été détectée par ledit capteur de détection de position de point de vue (144, 154),

caractérisé en ce que

le trou (118) ménagé dans le masque d'affichage (114) est la seule partie à travers laquelle la surface d'affichage (116) du dispositif d'affichage (112) peut être vue, la région d'affichage (242) observable sur la surface d'affichage (116) variant de la sorte en fonction de la position de point de vue de l'utilisateur (140, 150),

le dispositif de traitement (130) déduit la région d'affichage (242) correspondant au point de vue de l'utilisateur (140, 150) et effectue un rendu d'image pour cette région, et

le trou (118) est suffisamment grand pour permettre à chaque utilisateur (140, 150) de voir entièrement la région d'affichage (242) correspondant à cet utilisateur (140, 150) sur la surface d'affichage (116).

2. Dispositif d'affichage à partage multiple (110) selon la revendication 1, dans lequel ladite image à afficher sur la surface d'affichage (116) comprend une vidéo pour visualisation en trois dimensions.

3. Dispositif d'affichage à partage multiple (110) selon la revendication 2, dans lequel chaque utilisateur (140, 150) porte des lunettes (142, 152) pour séparer ladite vidéo pour visualisation en trois dimensions affichée sur la surface d'affichage (116) en celle pour l'oeil droit et celle pour l'oeil gauche ; et la pluralité de vidéos pour une visualisation en trois dimensions présentées sur ladite surface d'affichage (116) sont des images permettant une séparation entre celle pour l'oeil droit et celle pour l'oeil gauche à travers lesdites lunettes (142, 152).

4. Dispositif d'affichage à partage multiple (110) selon la revendication 3, dans lequel lesdites lunettes (142, 152) sont des lunettes dans lesquelles des obturateurs pour l'oeil droit et pour l'oeil gauche s'ouvrent et se ferment ; et ledit dispositif de traitement (130) est en combinaison dynamique avec lesdites lunettes (142, 152).

5. Dispositif d'affichage à partage multiple (110) selon la revendication 3 ou 4, dans lequel lesdites lunettes (142, 152) et ledit capteur de détection de position de point de vue (144, 154) sont formés d'une seule pièce.

FIG.1

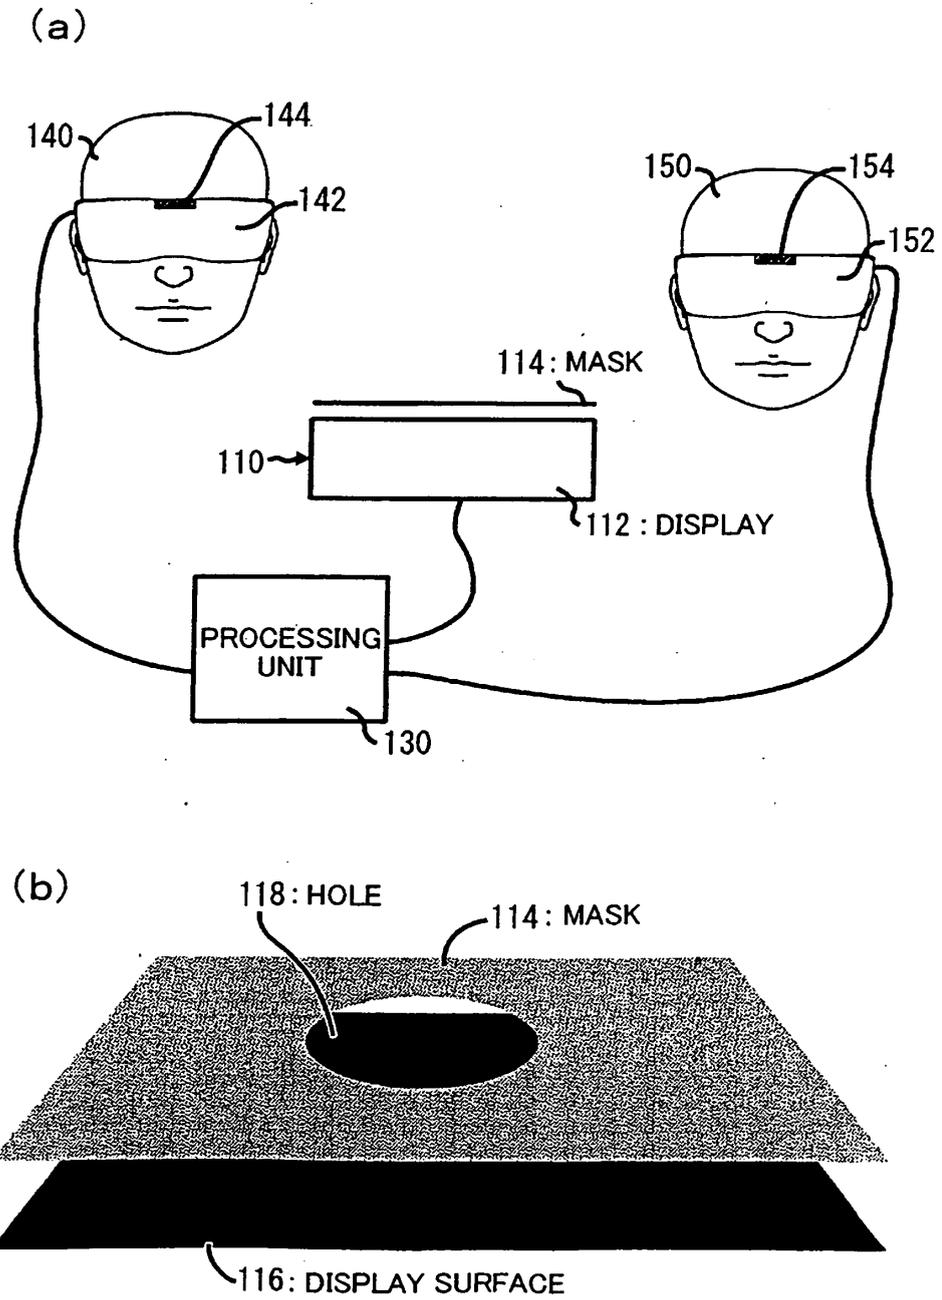


FIG.2


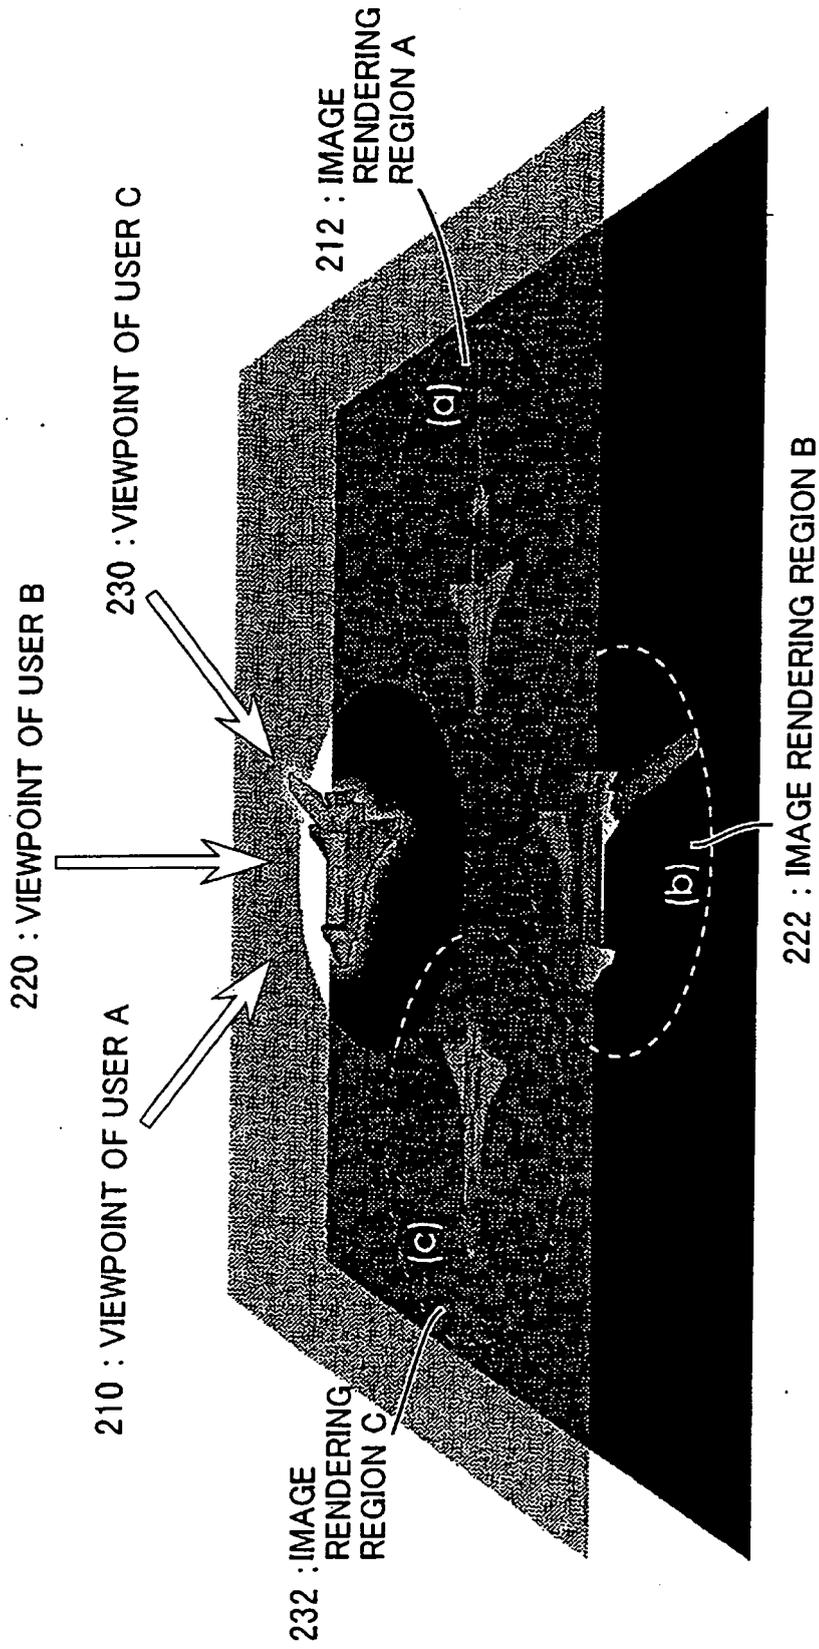


FIG.3

(a) IMAGE FOR RIGHT EYE

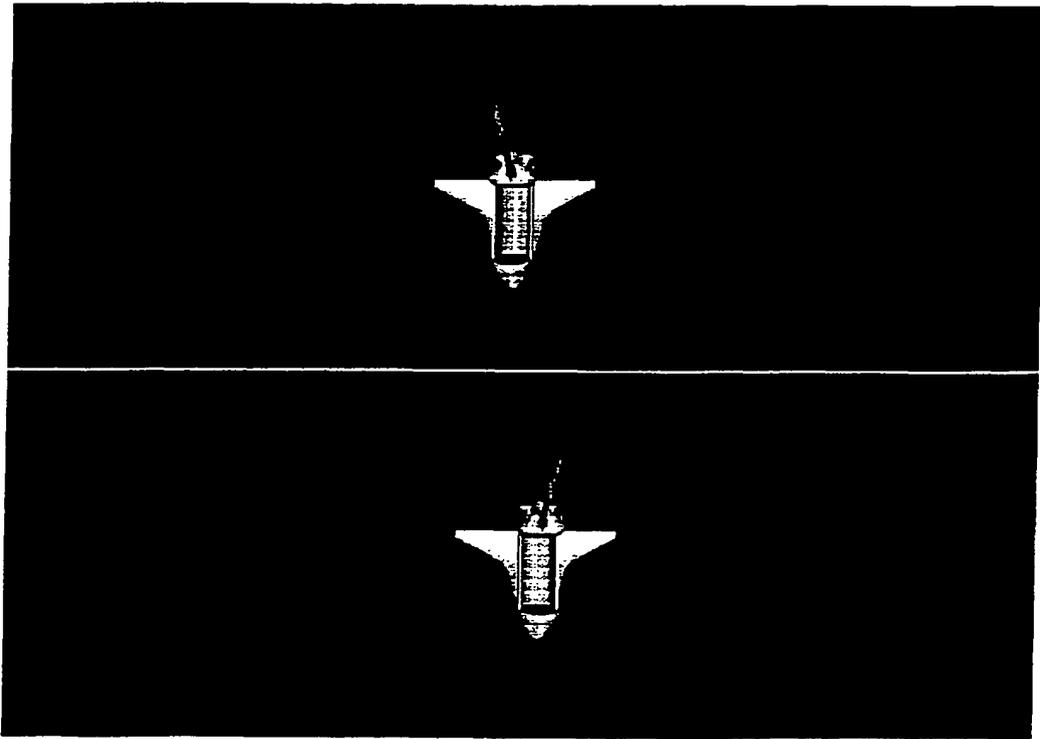

(b) IMAGE FOR LEFT EYE

FIG.4

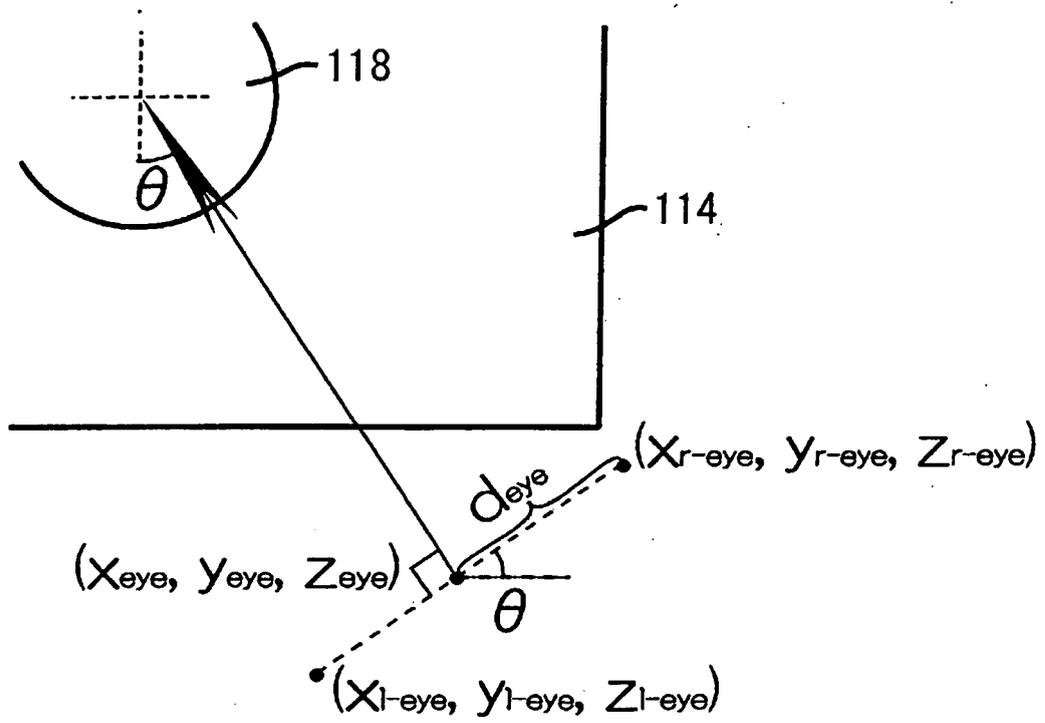


FIG.5

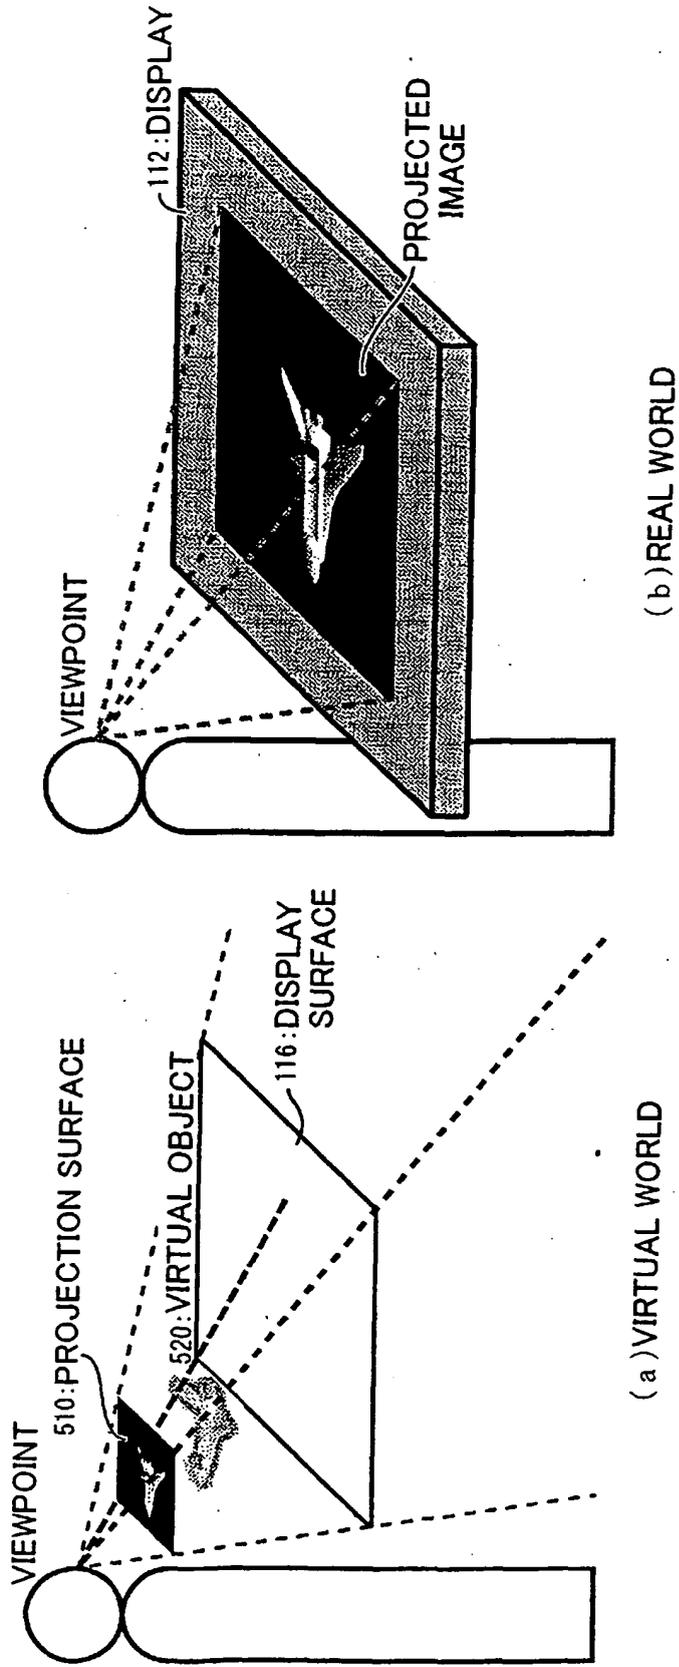


FIG.6

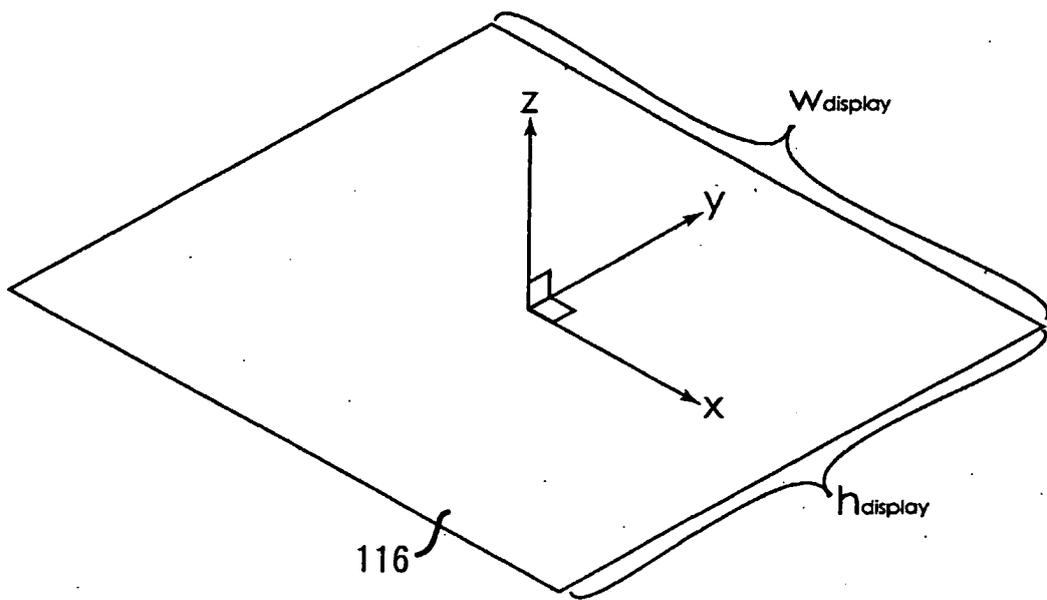


FIG.7

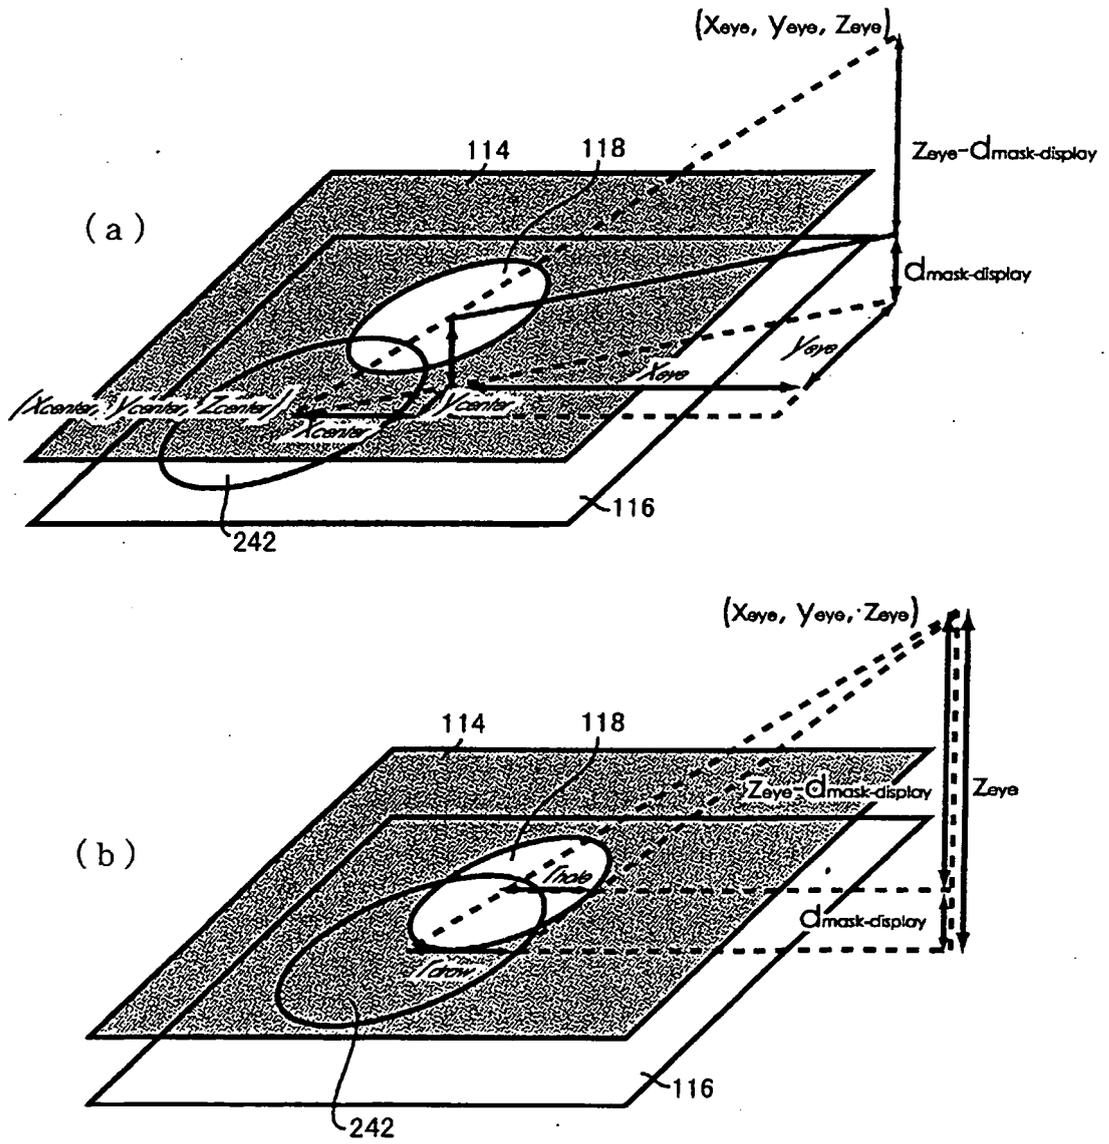


FIG.8

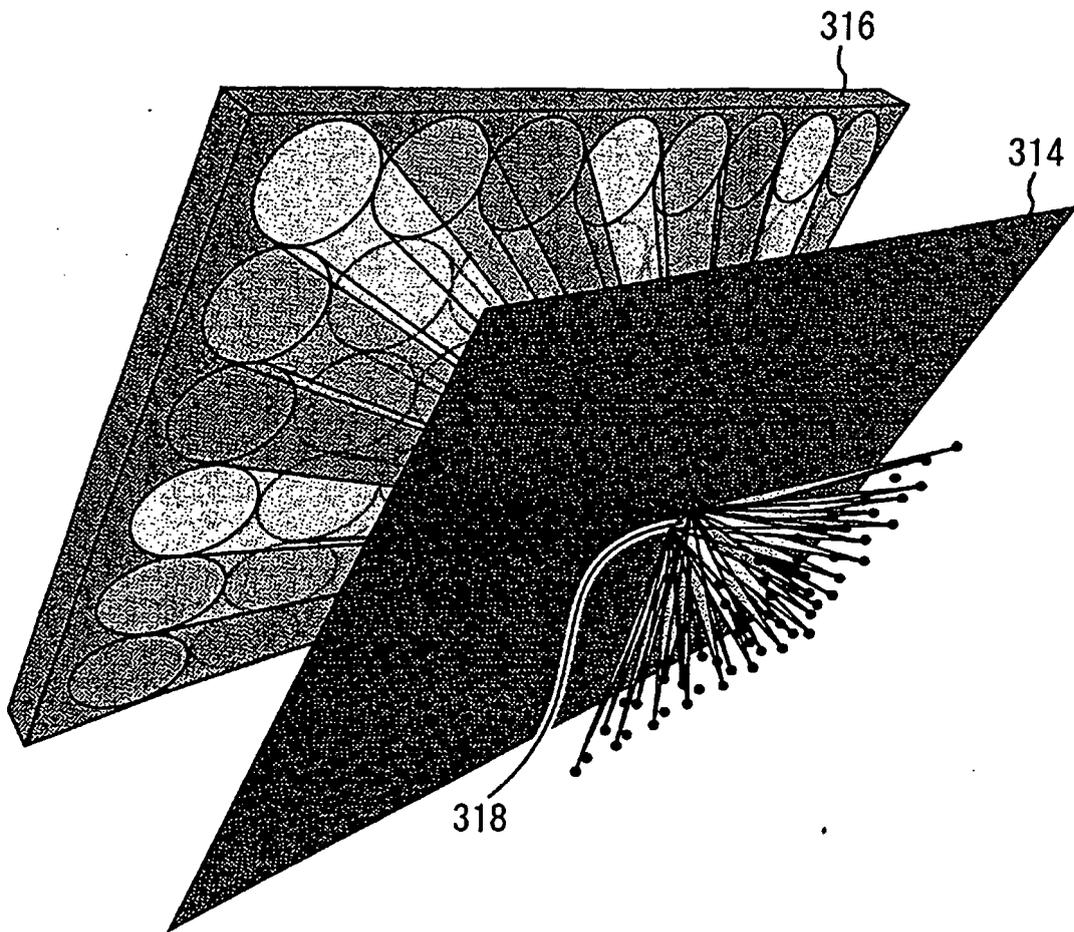


FIG.9


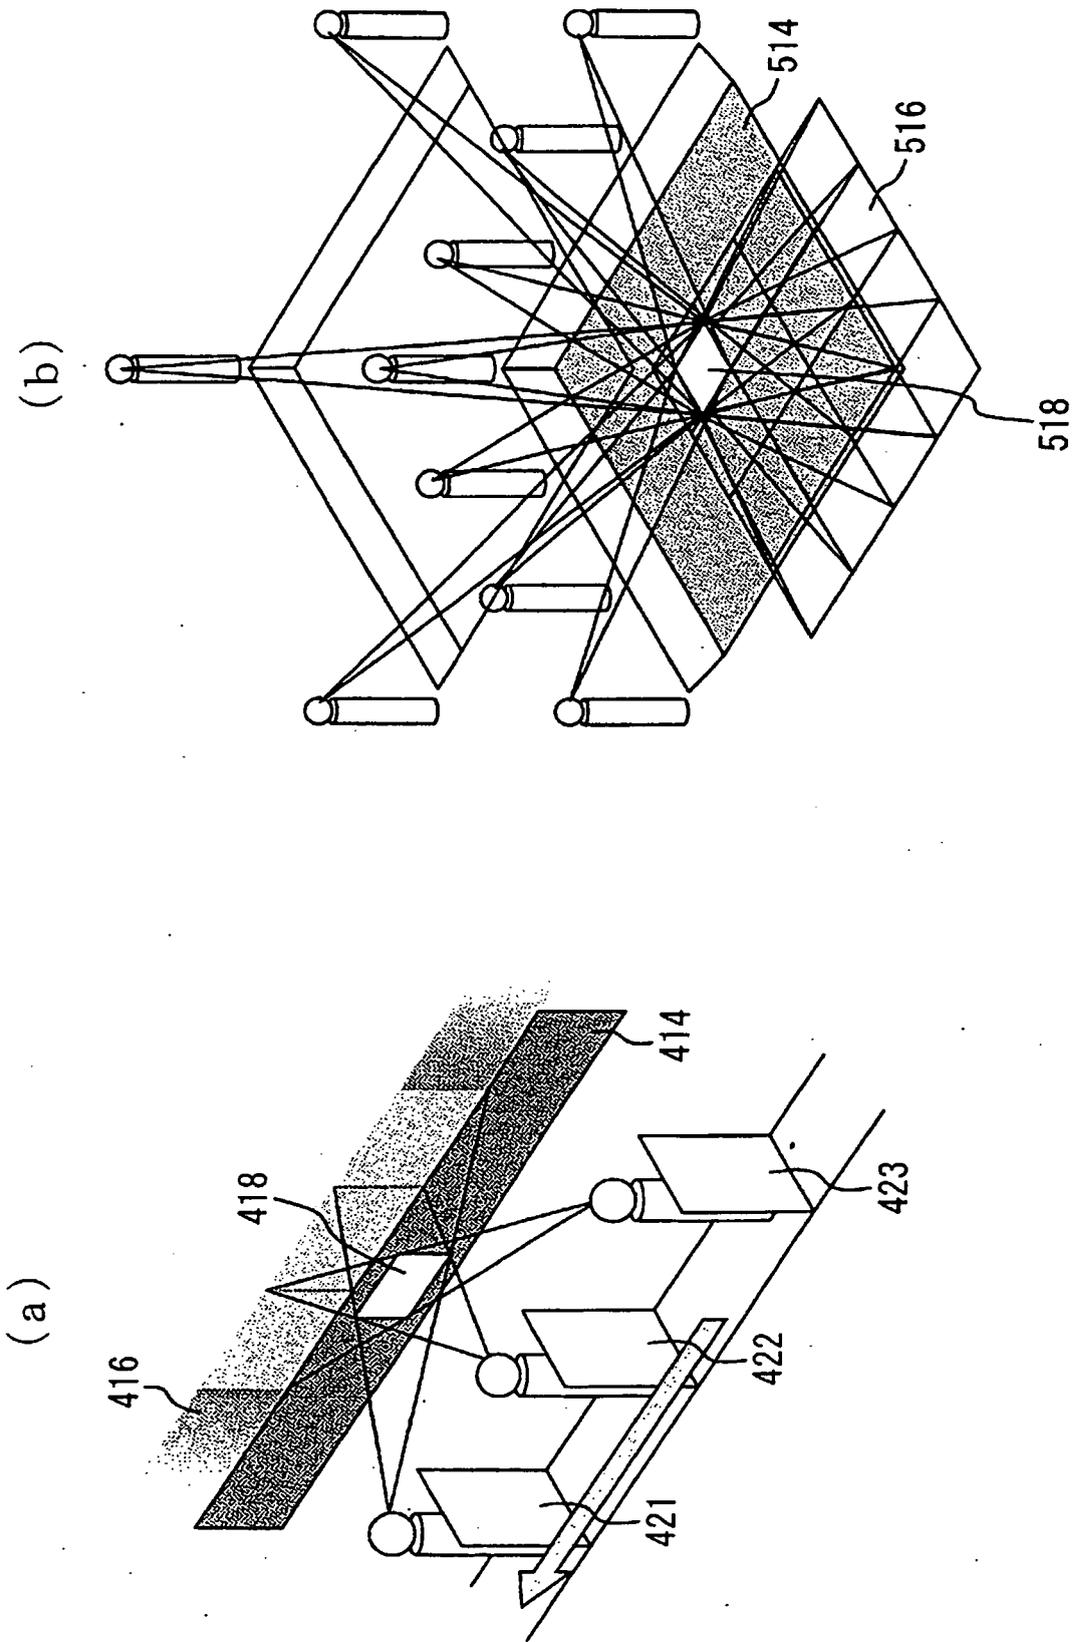


FIG.10

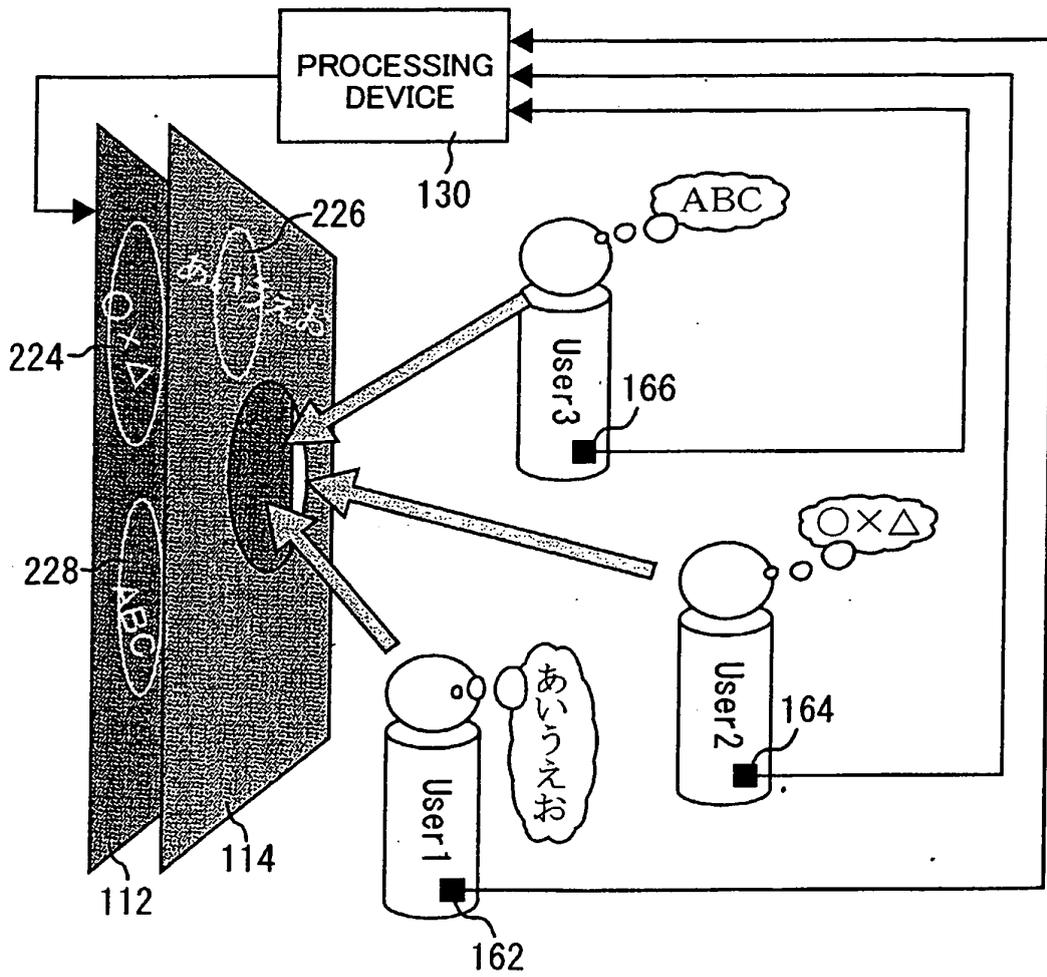

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP HEI10260377 B [0009]
- EP 0899969 A2 [0012]
- US 5855425 A [0013]
- JP 2001013457 A [0053]

Non-patent literature cited in the description

- **MIYASATO, Tsutomu et al.** *General Conference of the Institute of Electronics Information and Communication Engineers*, 1997, A 16-21 [0009]
- **KIMURA, Katsuyuki et al.** *Conference on Three-Dimensional Imaging*, 1994, 5-7 [0009]