



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
29.10.2003 Bulletin 2003/44

(51) Int Cl.7: **G01N 1/22, A61B 5/00,
A61B 10/00**

(21) Application number: **01995011.2**

(86) International application number:
PCT/JP01/11435

(22) Date of filing: **26.12.2001**

(87) International publication number:
WO 02/054041 (11.07.2002 Gazette 2002/28)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

- **NAITO, Ken**
Nagoya-shi, Aichi 468-0006 (JP)
- **NOSE, Kazutoshi**
Nagoya-shi, Aichi 466-0849 (JP)

(30) Priority: **27.12.2000 JP 2000396949**

(71) Applicant: **JAPAN SCIENCE AND TECHNOLOGY
CORPORATION**
Kawaguchi-shi, Saitama 332-0012 (JP)


(74) Representative: **Carstairs, J. C. et al**
Forrester & Boehmert,
Pettenkoferstrasse 20-22
80336 München (DE)

(72) Inventors:
• **TSUDA, Takao**
Nisshin-shi, Aichi 470-0134 (JP)

(54) **SKIN PERMEABLE GAS COLLECTOR AND SKIN PERMEABLE GAS MEASURING APPARATUS**

(57) An apparatus for measuring skin permeable gas is provided, wherein such an apparatus can be used to obtain clinical information by noninvasive and bloodless operations and are useful for in-home medical care and health management.

A device for collecting skin permeable gas includes a container (1) for storing skin permeable gas; a partition (2), disposed at a lower section inside the container (1), having an opening (2A) at the center thereof; and an operating member (3) for opening and closing the opening (2A) of the partition (2).

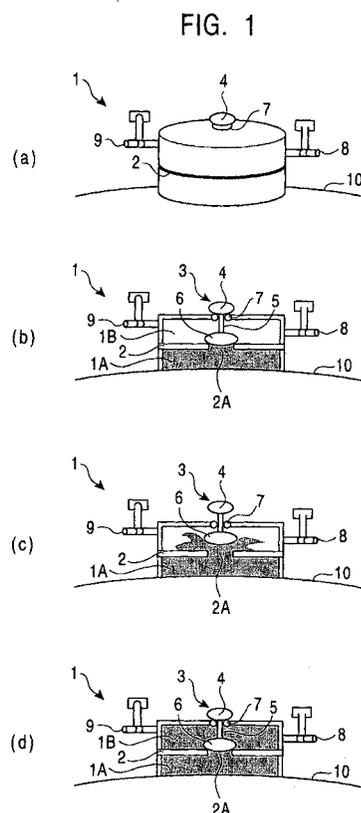

Description

Technical Field

5 **[0001]** The present invention relates to a device for collecting skin permeable gas and an apparatus for measuring such skin permeable gas, wherein the device and apparatus are used to determine the health condition of subjects.

Background Art

10 **[0002]** Conventionally, blood and human metabolites (urine and feces) have been major clinical items used for determining human health condition. Recently, saliva and expired gas have been becoming test objects, and sweat will be also included in such clinical items in future. Components of such expired gas, saliva, and sweat depend on components of blood and thus there is quantitative relationship between both the components. It is expected that these noninvasive metabolites be used in the field of in-home medical care and health management in future.

15 **[0003]** There have been no measuring equipment used for clinical measurement and no measuring equipment for determining human health condition using such skin permeable gas. This is because the existence of the skin permeable gas itself has not been assumed for such purposes.

Disclosure of Invention

20 **[0004]** As described above, the inventors have found that skin permeable gas depends on components of blood in peripheral blood vessels. The inventors have also found that the skin permeable gas is extremely important in determining new types of morbidity.

25 **[0005]** In view of the above situation, it is an object of the present invention to provide an apparatus for measuring the skin permeable gas, wherein such an apparatus can be used to obtain clinical information by noninvasive and bloodless operations and is useful for in-home medical care and health management.

[0006] In order to achieve the above object, the following devices and apparatus are provided.

30 (1) A skin permeable gas-collecting device including a container having an opening section and including a storing means for storing skin permeable gas emanating from skin, the skin permeable gas being obtained by bringing the opening section into intimate contact with the skin; and a delivery means for delivering the skin gas stored in the container.

35 (2) The skin permeable gas-collecting device further including a partition, disposed at a lower section inside the container, having an opening at the center thereof; and an operating member for opening and closing the opening of the partition.

(3) The skin permeable gas-collecting device, wherein the container includes a first sub-container, having a hole, for storing the skin permeable gas; a second sub-container that surrounds the first sub-container and is brought into intimate contact with the skin by decompression obtained by removing air; and a delivery unit for delivering the skin permeable gas stored in the first sub-container.

40 (4) A skin permeable gas-collecting device including a finger-stall including a coupler, and one or more connections that are connectable with the coupler and include a stopcock.

45 (5) A skin permeable gas-collecting device including a cylindrical member including a spiral groove, a cover disposed on the upper surface of the cylindrical member, a gas-introducing section connected to the cover, a gas delivery section connected to the cover, and a sealing member for sealing the groove of the cylindrical member and for maintaining air contained in the groove at a predetermined temperature, wherein, after components in the air maintained at a predetermined temperature are analyzed, the sealing member is detached from the cylindrical member and the cylindrical member from which the sealing member is detached is then brought into intimate contact with skin of a subject to collect the skin permeable gas.

50 (6) A skin permeable gas-measuring apparatus including a first container, having an opening, for storing skin permeable gas; a blower fan for circulating the stored skin permeable gas; and a measuring unit including a coloring agent placed in a path through which the gas is circulated with the blower fan.

Brief Description of the Drawings

55 **[0007]**

FIG. 1 is an illustration showing a configuration of a skin permeable gas-collecting device according to a first example of the present invention.

FIG. 2 is an illustration showing a configuration of a skin permeable gas-collecting device according to a second example of the present invention.

FIG. 3 is an illustration showing a configuration of a skin permeable gas-collecting device according to a third example of the present invention.

FIG. 4 is an illustration showing a comparison between the acetone content in expired gas and the acetone content in vapor emanating from a left index finger.

FIG. 5 is an illustration showing a configuration of a skin permeable gas-collecting device (sampling probe) according to a fourth example of the present invention.

FIG. 6 is an illustration showing the relationship between the quantity of emitted acetone and BMI, wherein the acetone quantity is obtained with a device of the present invention and BMI is an obesity index.

FIG. 7 is an illustration showing chromatograms of a probe blank of the present invention which is obtained by performing sampling inside a left forearm for ten minutes.

FIG. 8 is an illustration (first illustration) showing the relationship between the ingestion of milk and the quantity of emitted hydrogen gas collected with a skin permeable gas-collecting device of the present invention; between the ingestion of milk and the quantity of the hydrogen gas in expired gas after the ingestion of milk.

FIG. 9 is an illustration (second illustration) showing the relationship between the ingestion of milk and the quantity of emitted hydrogen gas collected with a skin permeable gas-collecting device of the present invention; between the ingestion of milk and the quantity of the hydrogen gas in expired gas after the injection of milk.

FIG. 10 is an illustration (third illustration) showing the relationship between the ingestion of milk and the quantity of emitted hydrogen gas collected with a skin permeable gas-collecting device of the present invention; between the ingestion of milk and the quantity of the hydrogen gas in expired gas after the ingestion of milk.

FIG. 11 is an illustration (fourth illustration) showing the relationship between the ingestion of milk and the quantity of emitted hydrogen gas collected with a skin permeable gas-collecting device of the present invention; between the ingestion of milk and the quantity of the hydrogen gas in expired gas after the ingestion of milk.

FIG. 12 is an illustration showing a configuration of a skin permeable gas-measuring apparatus according to a fifth example of the present invention.

Best Mode for Carrying out the Invention

[0008] Embodiments of the present invention will now be described in detail with reference to the accompanying drawings.

[0009] FIG. 1 is an illustration showing a configuration of a skin permeable gas-collecting device according to a first example of the present invention. FIG. 1(a) is a perspective view showing the outline thereof, FIG. 1(b) is an illustration showing such a state that a lower chamber of the skin permeable gas-collecting device is filled with skin permeable gas, FIG. 1(c) is an illustration showing such a state that the skin permeable gas is allowed to flow into an upper chamber from the lower chamber, and FIG. 1(d) is an illustration showing such a state that the upper chamber filled with the skin permeable gas is sealed.

[0010] In these figures, reference numeral 1 represents a container of the skin permeable gas-collecting device; reference numeral 1A represents a lower chamber disposed in the container 1; reference numeral 1B represents an upper chamber disposed in the container 1; reference numeral 2 represents a partition plate, disposed at a lower position inside the container 1, having an opening 2A at the center thereof; reference numeral 3 represents an operating member capable of opening and closing the opening 2A of the partition plate 2; reference numeral 4 represents a knob disposed at the upper end of the operating member 3; reference numeral 5 represents a rod of the operating member 3; reference numeral 6 represents a valve member disposed at the lower end of the rod 5; reference numeral 7 represents an O-ring for sealing a gap between the container 1 and the rod 5; reference numeral 8 represents a ventilation port, connected to the container 1, for removing the skin permeable gas; reference numeral 9 represents a delivery port, connected to the container 1, for removing the skin permeable gas; and reference numeral 10 represents skin of a subject.

[0011] The operation of this device is described below.

[0012] As shown in FIG. 1(b), the container 1 of the skin permeable gas-collecting device is pressed against the subject skin 10 and then fixed thereto in such a state that the operating member 3 is pressed downward and thereby the opening 2A of the partition plate 2 is stopped up with the valve member 6. In such a state, skin permeable gas emanating from the subject skin 10 is collected in the lower chamber 1A. The ventilation port and the delivery port 9 for removing the skin permeable gas are closed, wherein the ventilation port and the delivery port 9 are connected to the container 1.

[0013] After the collection of the skin permeable gas is finished, the operating member 3 is drawn up to open the opening 2A of the partition plate 2, as shown in FIG. 1(c). Thereby, the skin permeable gas collected in the lower chamber 1A is allowed to flow into the upper chamber 1B.

[0014] As shown in FIG. 1(d), the operating member 3 is pressed down again to close the opening 2A of the partition plate 2 and thereby the skin permeable gas is trapped and stored in the upper chamber 1B.

[0015] The delivery port 9 for the skin permeable gas is opened, the ventilation port 8 is also opened, and gas is fed from the ventilation port 8 to force the skin permeable gas out, thereby subjecting the skin permeable gas to measurement. This procedure, however, is not shown in the figure.

[0016] FIG. 2 is an illustration showing a configuration of a skin permeable gas-collecting device according to a second example of the present invention.

[0017] In this figure, reference numeral 11 represents a first container for storing the skin permeable gas; reference numeral 12 represents a second container, surrounding the first container 11 for removing air to provide decompression to bring the first container 11 into intimate contact with skin; reference numeral 13 represents an evacuation unit, connected to the second container 12, for removing gas; reference numeral 14 represents a cock; reference numeral 15 represents a gas-introducing unit connected to the first container 11; reference numeral 16 represents a delivery unit, connected to the first container 11, for removing the skin permeable gas; and reference numeral 17 represents skin of a subject.

[0018] According to the above configuration, after the delivery unit 16 is closed and the gas-introducing unit 15 is opened to introduce gas (dry air) into the first container 11, the gas-introducing unit 15 is closed to collect the skin permeable gas from the subject skin 17. After the skin permeable gas is collected, the delivery unit 16 is opened to deliver the skin permeable gas into a test container (not shown).

[0019] In this case, in order to bring the first container 11 into intimate contact with the subject skin 17, the container section has dual structure. In particular, the second container 12 arranged outside the first container 11 is decompressed with the evacuation unit 13, thereby bringing the first container 11 into intimate contact with the skin.

[0020] FIG. 3 is an illustration showing a configuration of a skin permeable gas-collecting device according to a third example of the present invention. FIG. 3(a) is an illustration showing a finger-stall and an injection syringe connected thereto, FIG. 3(b) is an illustration showing such a situation that a finger is fitted into the finger-stall, FIG. 3(c) is an illustration showing such a situation that the finger-stall is filled with air fed from the injection syringe, and FIG. 3(d) is an illustration showing such a situation that the air and skin permeable gas are inhaled.

[0021] In these figures, reference numeral 21 represents a finger-stall (a bag made from Teflon), reference numeral 22 represents a coupler (for example, a cock), reference numeral 23 represents an injection syringe (100 ml), reference numeral 24 represents a stopcock, reference numeral 25 represents rubber or a clip provided on the outside of the base of the finger-stall 22, reference numeral 26 represents a finger of a subject, reference numeral 27 represents a gas-introducing unit, and reference numeral 28 represents the inflated finger-stall filled with air.

[0022] According to this example, the skin permeable gas can be recovered by the following methods.

(1) First Method

[0023] As shown in FIG. 3(a), the following tools are prepared: the finger-stall 21 having the cock 22 at the tip thereof and the injection syringe 23, connectable to the cock 22, including the stopcock 24. As shown in FIG. 3(b), the finger 26 is fitted into the finger-stall 21. As shown in FIG. 3(c), the stopcock 24 is opened, the cock 22 is then opened to introduce gas (dry air) from the injection syringe 23, the finger-stall 21 is inflated and then sealed, and the stopcock 24 is then closed. Subsequently, the skin permeable gas is collected from the subject finger 26. After the collection of the skin permeable gas, the stopcock 24 is opened to deliver (recover) the collected skin permeable gas into injection syringe 23 through the cock 22.

(2) Second Method

[0024] As shown in FIG. 3(a), the following tools are prepared: the finger-stall 21 having the cock 22 at the tip thereof and the injection syringe 23, connectable to the cock 22, including the stopcock 24. As shown in FIG. 3(b), the finger 26 is fitted into the finger-stall 21. As shown in FIG. 3(c), the stopcock 24 is closed, the gas-introducing unit 27 is opened to introduce gas (dry air), the finger-stall 21 is inflated and then sealed, thereby collecting the skin permeable gas. After the collection of the skin permeable gas, the stopcock 24 is opened to recover the collected skin permeable gas into injection syringe 23 through the cock 22.

(3) Third Method

[0025] As shown in FIG. 3(a), the following tools are prepared: the finger-stall 21 having the cock 22 at the tip thereof and the injection syringe 23, connectable to the cock 22, including the stopcock 24. As shown in FIG. 3(b), the finger 26 is fitted into the finger-stall 21. As shown in FIG. 3(c), the stopcock 24 is opened, and the skin permeable gas is collected in the injection syringe 23 while the gas-introducing unit 27 is opened to introduce gas (dry air).

[0026] The collecting procedure is not limited to the above methods. Various modifications including the following procedures may be performed: a procedure in which gas is introduced from the cock 22 to collect the skin permeable gas and the skin permeable gas is then recovered (delivered) into the injection syringe 23 and a procedure in which gas is introduced from the gas-introducing unit 27 to collect the skin permeable gas and the skin permeable gas is then recovered through the cock 22.

[0027] According to the above configuration, emitted gas can be readily collected from the body skin surface, for example, the finger skin surface, which is herein used, and then recovered (delivered).

[0028] Examples according to the collecting procedure will now be described.

[0029] FIG. 4 is an illustration showing a comparison between the acetone content in expired gas and the acetone content in vapor emanating from a left index finger.

[0030] Acetone emanating from the left index finger was collected and the expired gas was also collected at the time when the acetone sampling is stated. The comparison result of the acetone content is shown in FIG. 4. As shown in this figure, there is a positive correlation between the acetone content in the expired gas and the acetone content in the vapor emanating from the left index finger.

[0031] When the acetone emanating from the left index finger was collected according to the above procedure and then determined, the outside air was used in this procedure. This is because the outside air inevitably leaks into the finger-stall when the finger is fitted into the finger-stall during the sampling.

[0032] This procedure was employed on the premise that the acetone content in the outside air does not change for a short period (within 30 minutes). Since the acetone content does not inevitably remain constant in actual, this procedure for determining the acetone content is not precise if a change in the acetone content exceeds allowable limits. In order to solve this problem, the following finger-stall and sampling procedure must be employed: a finger-stall into which the outside air does not leak when a finger is fitted into or drawn out of the finger-stall, and a sampling procedure using such a finger-stall.

[0033] FIG. 5 is an illustration showing a configuration of a skin permeable gas-collecting device (sampling probe) according to a fourth example of the present invention.

[0034] In this figure, reference numeral 31 represents a cylindrical member having a spiral groove 32; reference numeral 33 represents a cover placed on the upper face of the cylindrical member 31; reference numeral 34 represents a gas-introducing section connected to the cover 33; reference numeral 35 represents a gas delivery section connected to the cover 33; reference numeral 40 represents a sealing member, connected to the cylindrical member, for sealing the groove 32 of the cylindrical member 31 and for maintaining air contained in the groove 32 at a predetermined temperature; reference numeral 41 represents a heat sink; reference numeral 42 represents a Peltier element for adjusting the temperature of the contained air; reference numeral 43 represents a silicon coating; and reference numeral 44 represents a Teflon sheet for sealing the groove 32 containing the air.

[0035] Air in a laboratory room is introduced into the cylindrical member 31 from the gas-introducing section 34 and then stored therein, the temperature of the introduced air is adjusted to a predetermined value with the Peltier element 42, and the resulting air is delivered through the gas delivery section 35, thereby subjecting the air (probe blank) to measurement. Replacing the sealing member 40 connected to the cylindrical member in the situation, the bottom face of the cylindrical member 31 is pressed against skin of a subject 45 to collect skin permeable gas in the groove 32 of the cylindrical member 31 in a sealed manner while the above situation is maintained except that the sealing member 40 of the cylindrical member is not used. The collected skin permeable gas is delivered together with air through the gas delivery section 35 and is then subjected to measurement.

[0036] The measurement result is described below.

[0037] Table 1 shows the measurement result.

Human	Value Obtained from Measuring Tool (Air Only)	Value Obtained from Human Skin (Air + Skin Permeable Gas)	Actual Quantity Obtained from Human Skin
a	1.8	4.4	2.6
b	3.3	7.6	4.3
c**	3.1	11.7	8.6
d**	4.5	14.0	9.5
e**	3.9	9.1	5.2
f	4.9	7.7	2.8
g**	2.0	12.6	10.6

[0038] As shown in this table, for Subject a, the air quantity obtained from a measuring tool is 1.8 ng, and the total quantity of air and acetone is 4.4 ng, the acetone being skin permeable gas emanating from the subject. Thus, the quantity of acetone gas emanating from the skin surface of the subject is 2.6 ng. In any subject, sampling data obtained from skin has a higher value than that of the probe blank.

5 **[0039]** The acetone content in 50 ml, 25 ml, and 10 ml of room air is 5.8, 2.8, and 1.3 ng, respectively. Since the volume of the sampling probe is 3.8 ml, the quantity of contaminants leaking from the surroundings is 0.5 ng or less. The acetone content in air of the laboratory room is substantially equal to that in room air in a reinforced concrete building.

10 **[0040]** It can be inferred from the above result that the quantity of acetone emanating from a human skin surface can be measured with this experiment means.

[0041] FIG. 6 is an illustration showing the relationship between the quantity of emitted acetone and BMI (body mass index, defined as the formula: body weight (kg) / (body height (m))²), wherein the acetone quantity is obtained with a device of the present invention and BMI is an obesity index.

15 **[0042]** It is clear from this figure that there is a positive correlation between the obesity index (BMI) and the quantity of emitted acetone.

[0043] Gas collected from a human skin surface is analyzed by, for example, chromatography.

20 **[0044]** FIG. 7 is an illustration showing the result of chromatography analysis of a probe blank of the present invention which is obtained by performing sampling inside a left forearm for one minute. The upper section of FIG. 7 is an illustration showing the result of the chromatography analysis of gas obtained by performing sampling inside a left forearm for ten minutes using a skin permeable gas-collecting device of the present invention. The lower section of FIG. 7 is an illustration showing the result of the chromatography analysis of the probe blank. It is clear from this figure that the quantity of the skin permeable gas emanating from the human skin surface is larger than that of the gas remaining in the surroundings and the probe blank.

25 **[0045]** FIGS. 8 to 11 are illustrations showing the relationship between the ingestion of milk and the quantity of emitted hydrogen gas collected with a skin permeable gas-collecting device of the present invention; between the ingestion of milk and the quantity of the hydrogen gas in expired gas after the ingestion of milk. The illustrations show chromatograms obtained by measuring the hydrogen content in the following cases: an expired gas and a gas obtained from the left hand of Subject A (before the drinking of milk and after four hours following the drinking of the milk) and an expired gas and a gas obtained from the left hand of Subject B (before the drinking of milk and after four hours following the drinking of the milk).

30 **[0046]** FIG. 8 is an illustration showing chromatograms of hydrogen contained in expired gas. Chromatogram a is obtained by measuring the hydrogen content in expired gas of Subject A before the drinking of milk, and Chromatogram b is obtained by measuring the hydrogen content in expired gas of Subject A after the drinking of milk. In FIG. 8, Chromatograms (a) and (c) are obtained with a sensitivity of 5 mV and Chromatograms (b) and (d) are obtained with a sensitivity of 100 mV.

35 **[0047]** FIG. 9 is an illustration showing the analysis results of skin permeable gas obtained from left hands for ten minutes. The gas was obtained after about four hours since subjects had drunk milk. In FIG. 9, the sensitivity is 2 mV.

40 **[0048]** It is clear from these figures that human skin surface emanates hydrogen and the hydrogen can be detected using a device of the present invention. It is found that the correlation between the ingest of milk and the hydrogen emanation can be clarified.

[0049] When the hydrogen content in gas obtained before the drinking of milk is compared with the hydrogen content in gas obtained after about four hours following the drinking of milk, the following results are obtained: the hydrogen content in expired gas of Subject A increases from 2 to 7 ppm, the hydrogen content in expired gas of Subject B increases from 1 to 91 ppm, the hydrogen content in gas emanating from the left hand of Subject A increases from 0.003 to 0.08 ppm, and the hydrogen content in gas emanating from the left hand of Subject B increases from 0.07 to 0.41 ppm. Thus, it is clear that an increase in hydrogen in not only expired gas but also gas emanating from a left hand is caused by the drinking of milk. Furthermore, it is clear from this measurement that there is an extremely high correlation between the hydrogen content in expired gas and the hydrogen content in gas emanating from skin.

45 **[0050]** FIGS. 10 and 11 are illustrations showing a correlation between expired gas and skin permeable gas. There is a obvious correlation for hydrogen, which suggests that diagnosis using the skin permeable gas is possible.

[0051] FIG. 12 is an illustration showing a configuration of a skin permeable gas-measuring apparatus according to a fifth example of the present invention.

50 **[0052]** In this figure, reference numeral 50 represents a skin permeable gas-measuring apparatus, reference numeral 51 represents a skin permeable gas-collecting chamber, reference numeral 52 represents a circulating chamber, reference numeral 53 represents a blower fan, reference numeral 54 represents various coloring agents A, B, C, and reference numeral 55 represents skin of a subject.

55 **[0053]** As shown in this figure, skin permeable gas is collected on the skin 55, the collected skin permeable gas is then immediately circulated to allow the gas to pass through the various coloring agents 54, thereby detecting specific

gas. Thus, the subject can obtain the measurement result on the spot.

[0054] Information processing of a sampling detection system disposed on skin can be performed with a computer, which is not shown.

5 **[0055]** In order to prevent gas from being absorbed in H₂O in sweat, gas replacement is sufficiently performed. That is, it is critical that used gas is removed by ventilation and sample gas is collected while the sample gas is successively discharged.

[0056] The use of the present invention is described below.

10 **[0057]** A correlation between skin permeable gas and morbidity is as follows. The skin permeable gas has a correlation with diabetes, obesity, and autointoxication when the skin permeable gas is acetone, and the skin permeable gas has a quantitative correlation with the presence of enteric bacteria that decompose lactose when the skin permeable gas is hydrogen. Furthermore, the skin permeable gas has a correlation with uremia, liver failure, abdominal abscess, and the presence of helicobacter pylori when the skin permeable gas is ammonia. As described above, the measurement of the skin permeable gas according to the present invention can be contribute to the diagnosis of various types of morbidity.

15 **[0058]** It should be understood that the present invention is not limited to the above examples and various modifications may be performed within the scope of the present invention. The present invention is intended to cover such modifications.

[0059] As described above in detail, according to the present invention, the following advantages can be obtained.

20 (A) Clinical information that are useful for in-home medical care and health management can be obtained by noninvasive and bloodless operations.

(B) Skin permeable gas emanating from skin surface can be readily collected and the species and quantity of such gas can be analyzed.

(C) Collected gas can be readily stored in a sealed manner and then transported to a measuring apparatus.

25 (D) Secure attachment to skin is possible.

(E) Contaminants contained in the space of a cylindrical member and/or leaking from the surroundings can be measured in advance and therefore the skin permeable gas can be precisely analyzed.

(F) When a spiral groove is placed, the quantity of collected gas per unit area of skin can be increased and thus the skin permeable gas can be efficiently collected.

30 (G) The miniaturization of a device and apparatus is possible.

Industrial Applicability

35 **[0060]** As described above, a skin permeable gas-collecting device and skin permeable gas-measuring apparatus of the present invention are useful for clinical measurement using skin permeable gas and useful in determining human health condition. Such a device and apparatus can be miniaturized and are fit for the simple diagnosis of various types of morbidity.

40 Claims

1. A device for collecting skin permeable gas, comprising a container having an opening section and including a storing means for storing skin permeable gas emanating from skin, the skin permeable gas being obtained by bringing the opening section into intimate contact with the skin; and a delivery means for delivering the skin gas stored in the container.

2. The skin permeable gas-collecting device according to Claim 1 further comprising a partition, disposed at a lower section inside the container, having an opening at the center thereof; and an operating member for opening and closing the opening of the partition.

3. The skin permeable gas-collecting device according to Claim 1, wherein the container includes a first sub-container, having a hole, for storing the skin permeable gas; a second sub-container that surrounds the first sub-container and is brought into intimate contact with the skin by decompression obtained by removing air; and a delivery unit for delivering the skin permeable gas stored in the first sub-container.

4. A device for collecting skin permeable gas, comprising:

(a) a finger-stall including a coupler; and

EP 1 357 376 A1

(b) one or more connections that are connectable with the coupler and include a stopcock.

5. A device for collecting skin permeable gas, comprising:

- 5 (a) a cylindrical member including a spiral groove;
- (b) a cover disposed on the upper surface of the cylindrical member;
- (c) a gas-introducing section connected to the cover;
- (d) a gas delivery section connected to the cover; and
- 10 (e) a sealing member for sealing the groove of the cylindrical member and for maintaining air contained in the groove at a predetermined temperature,
- (f) wherein, after components in the air maintained at a predetermined temperature are analyzed, the sealing member is detached from the cylindrical member and the cylindrical member from which the sealing member is detached is then brought into intimate contact with skin of a subject to collect the skin permeable gas.

15 **6.** An apparatus for measuring skin permeable gas, comprising:

- (a) a first container, having an opening, for storing skin permeable gas;
- (b) a blower fan for circulating the stored skin permeable gas; and
- 20 (c) a measuring unit including a coloring agent placed in a path through which the gas is circulated with the blower fan.

25

30

35

40

45

50

55

FIG. 1

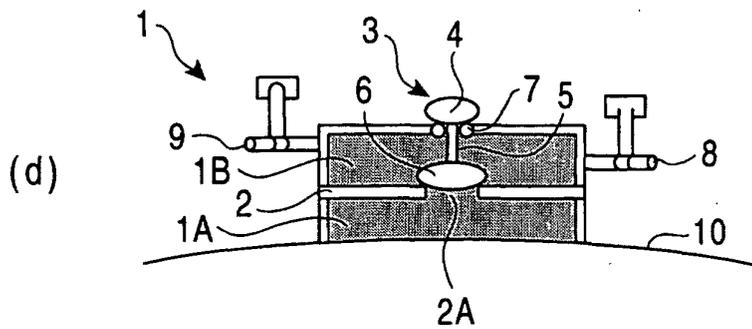
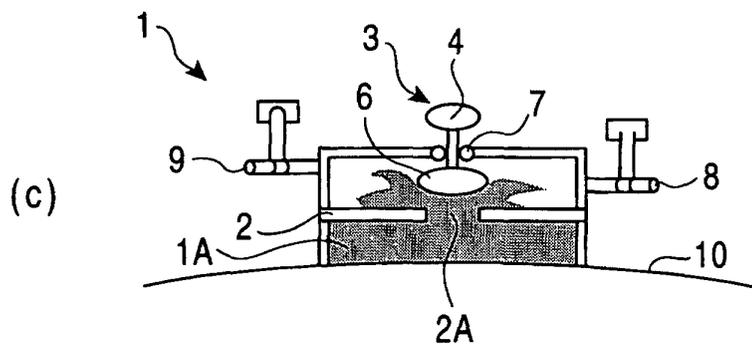
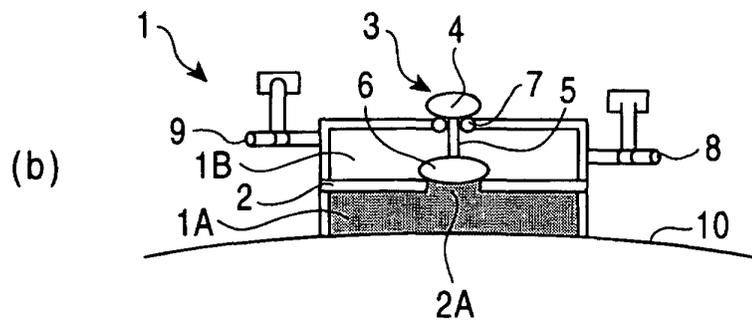
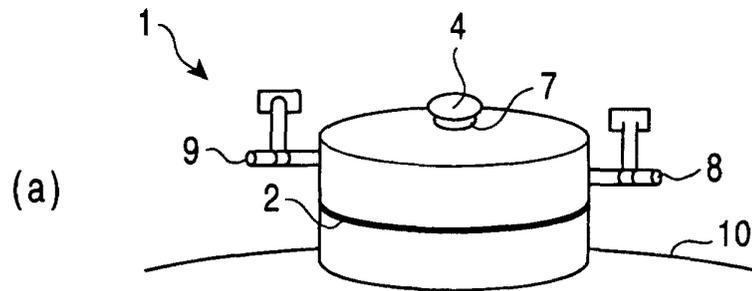


FIG. 2

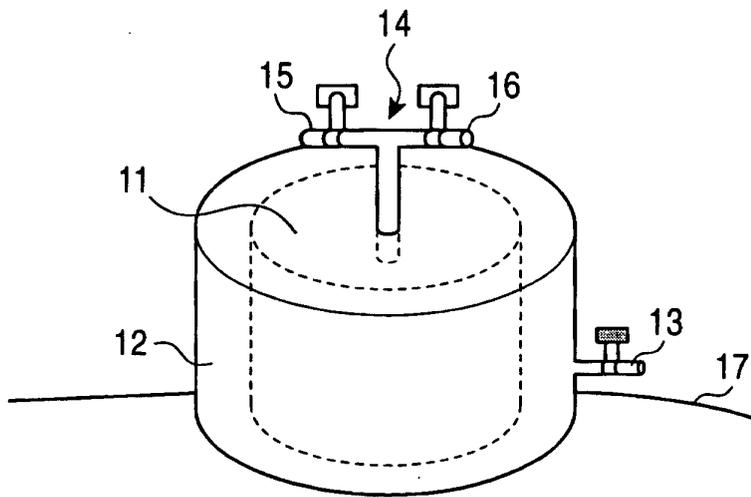


FIG. 3

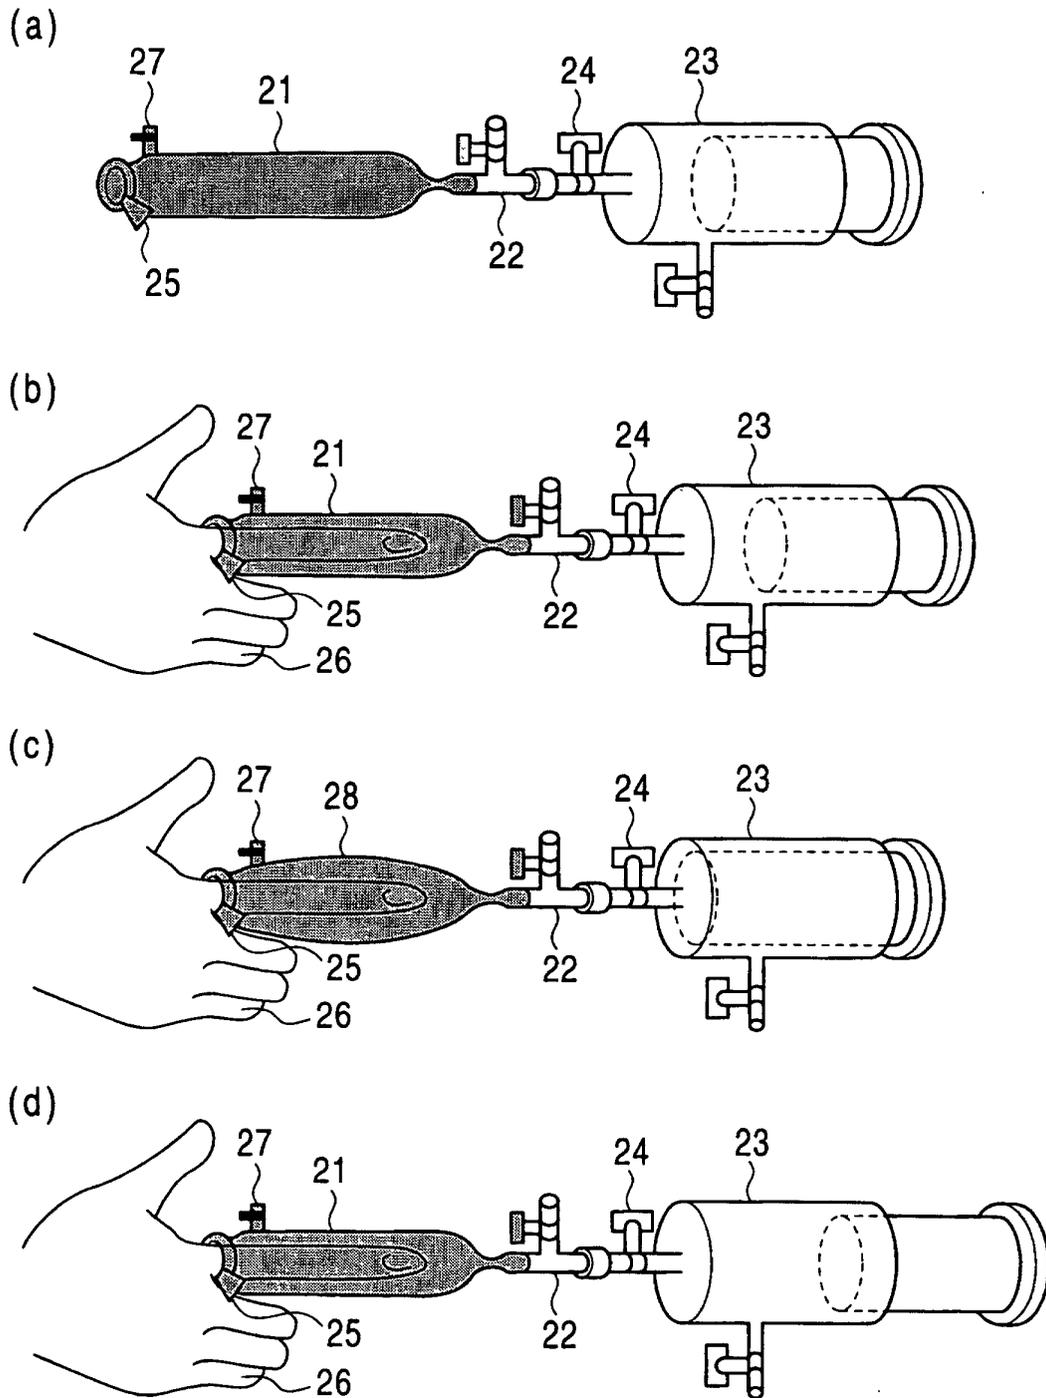


FIG. 4

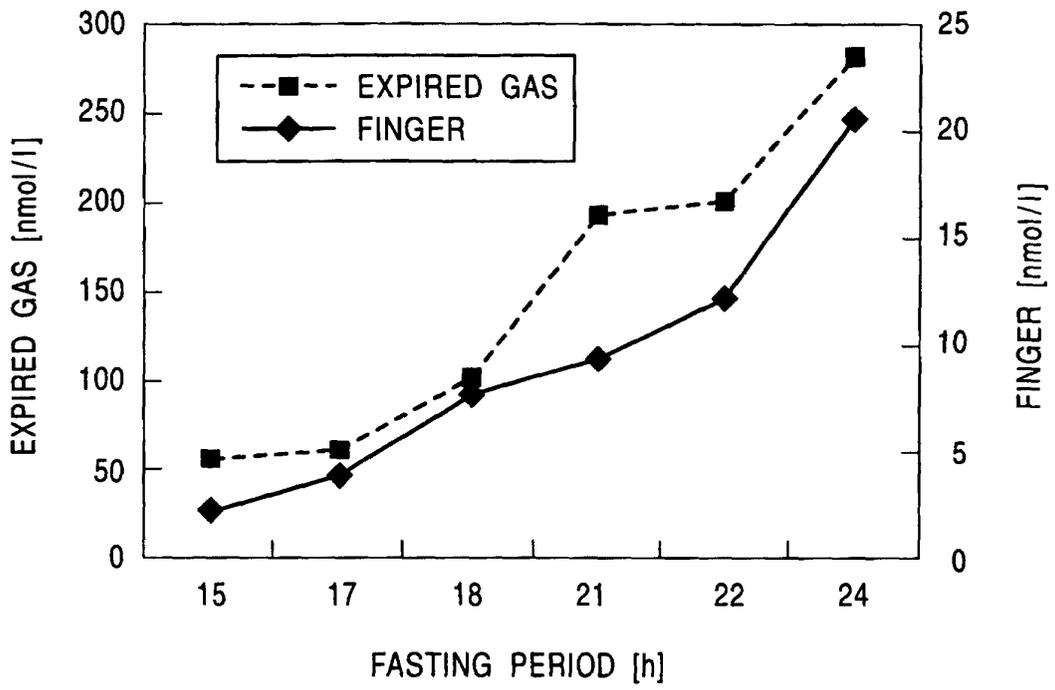


FIG. 5

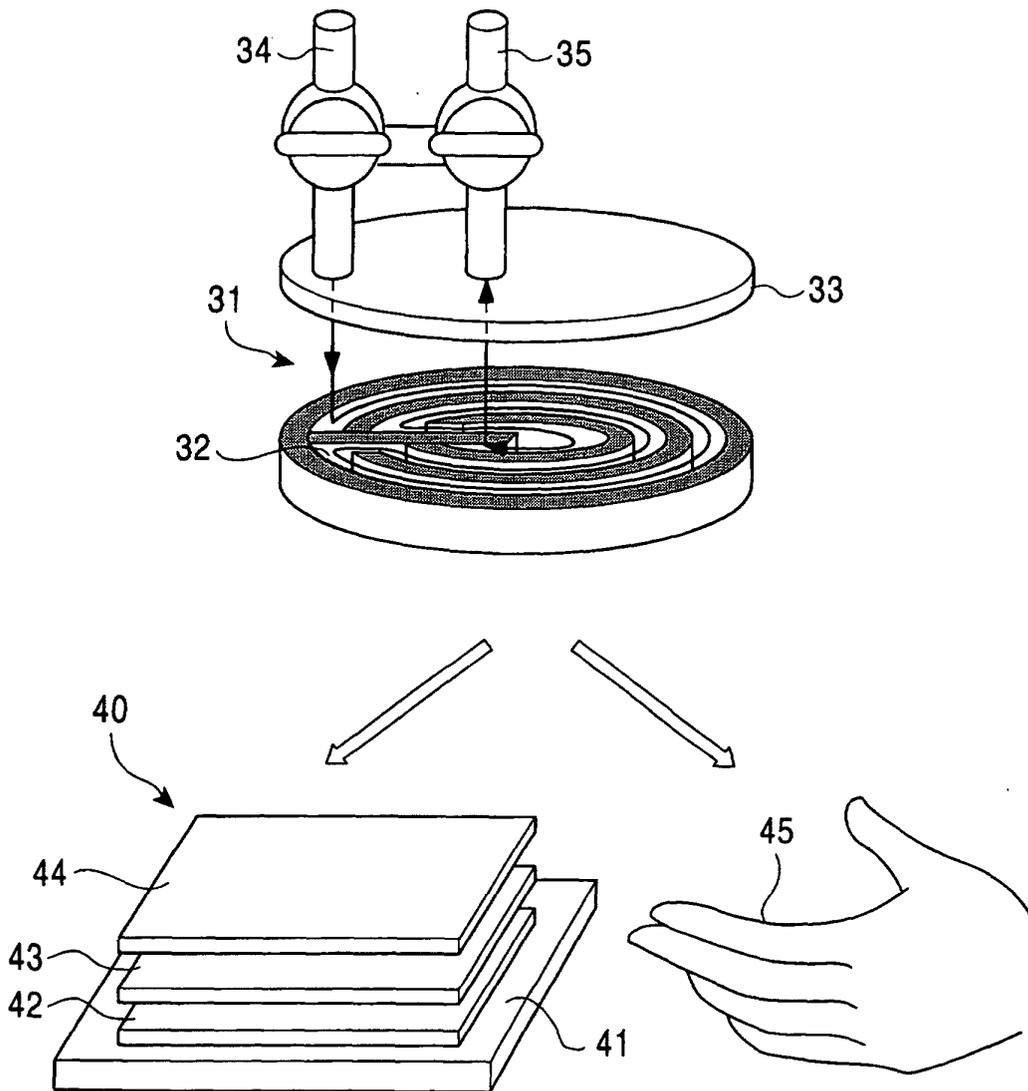


FIG. 6

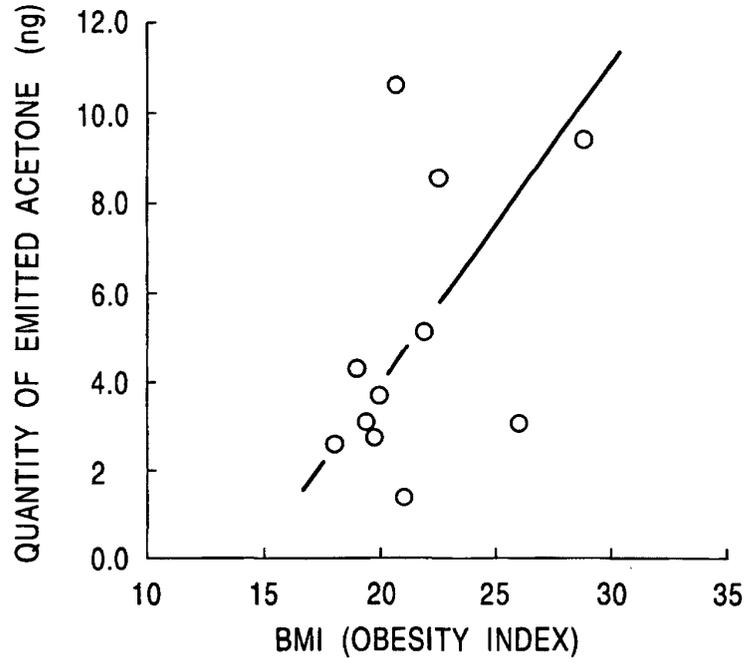


FIG. 7

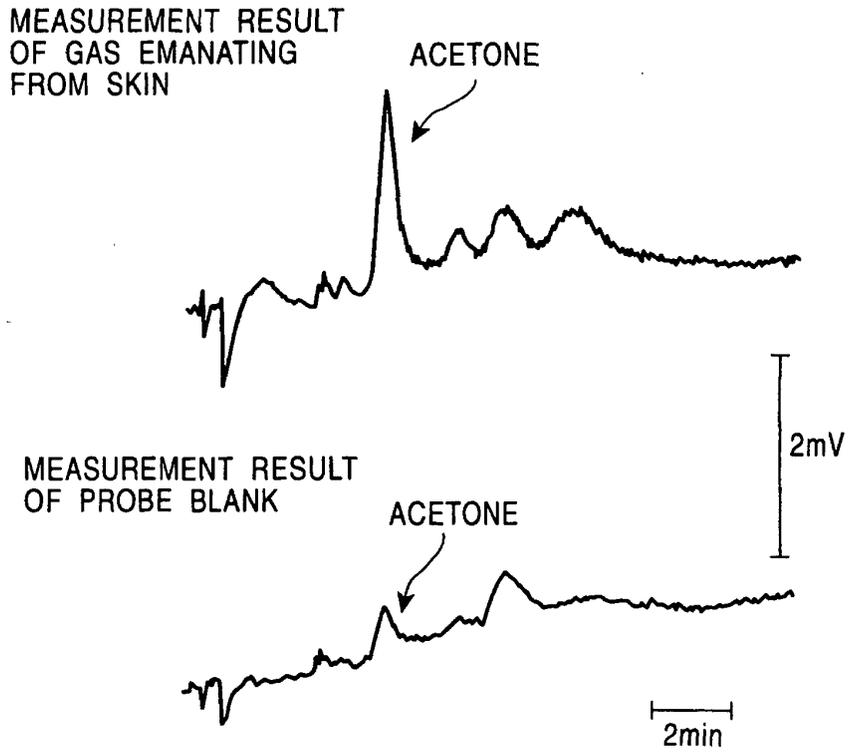


FIG. 8

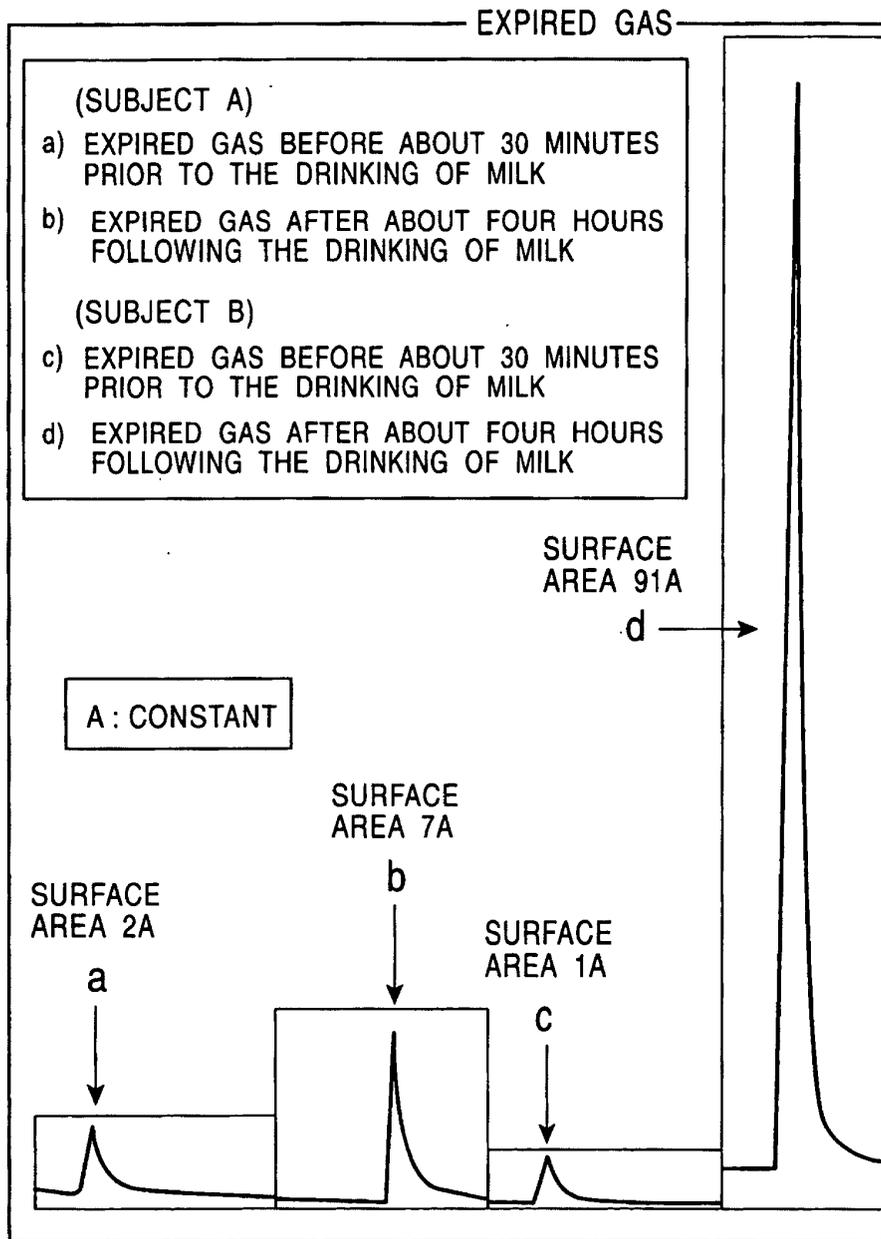


FIG. 9

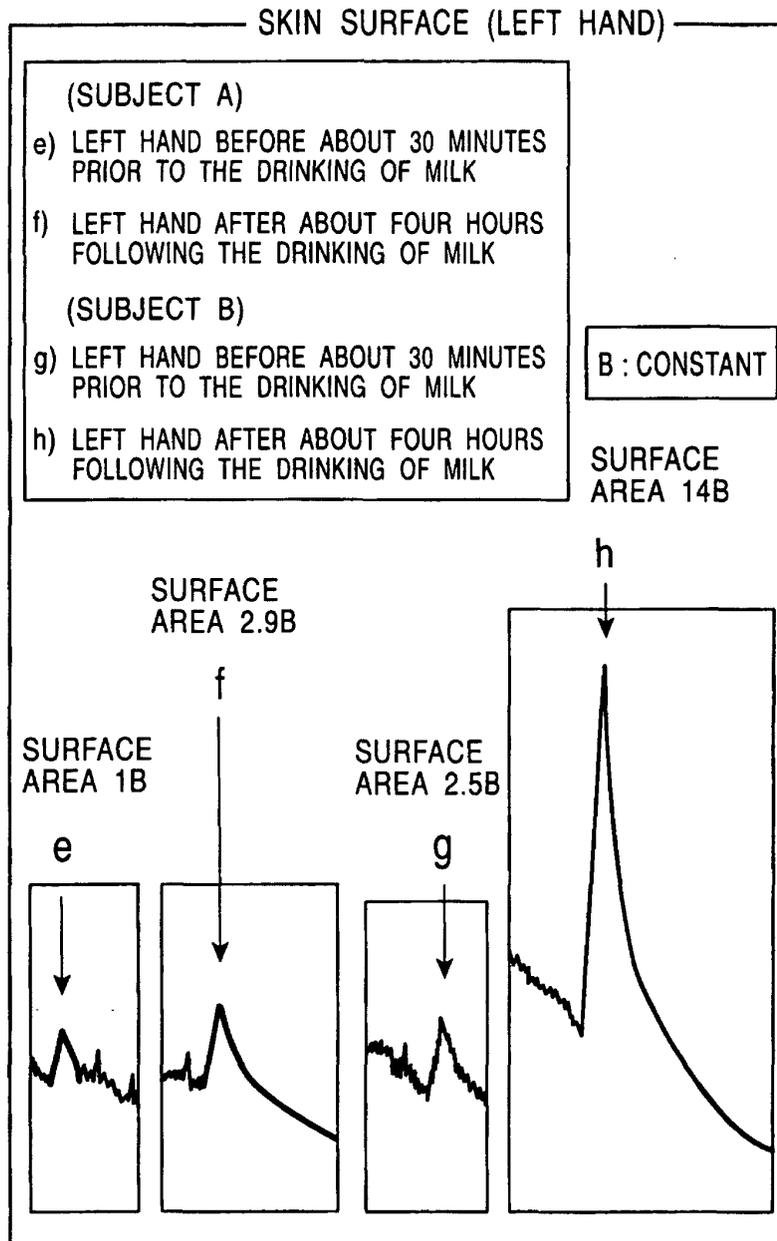


FIG. 10



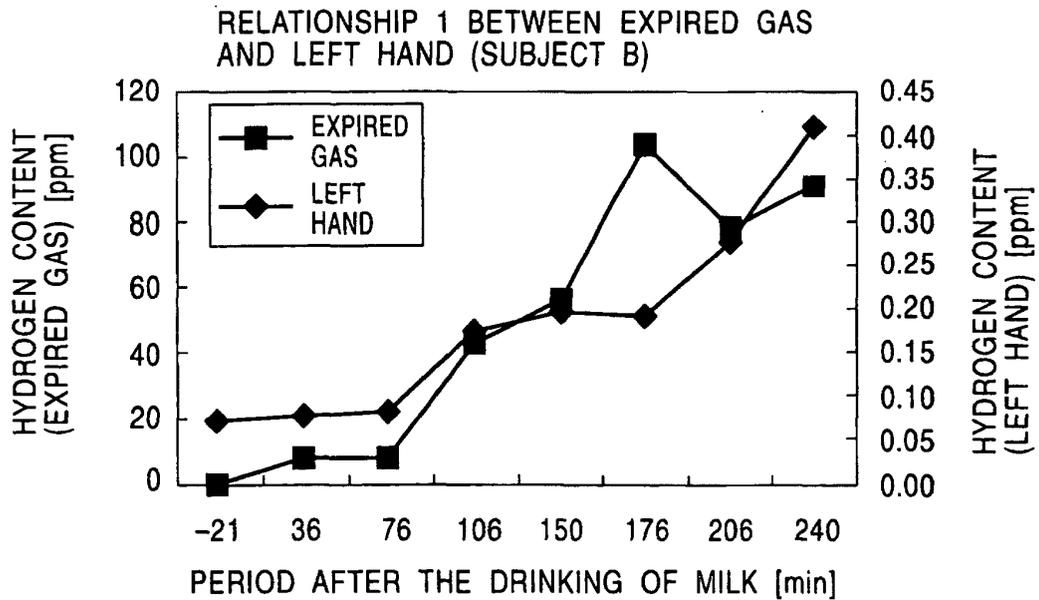


FIG. 11

RELATIONSHIP 2 BETWEEN EXPIRED GAS AND LEFT HAND (SUBJECT A)

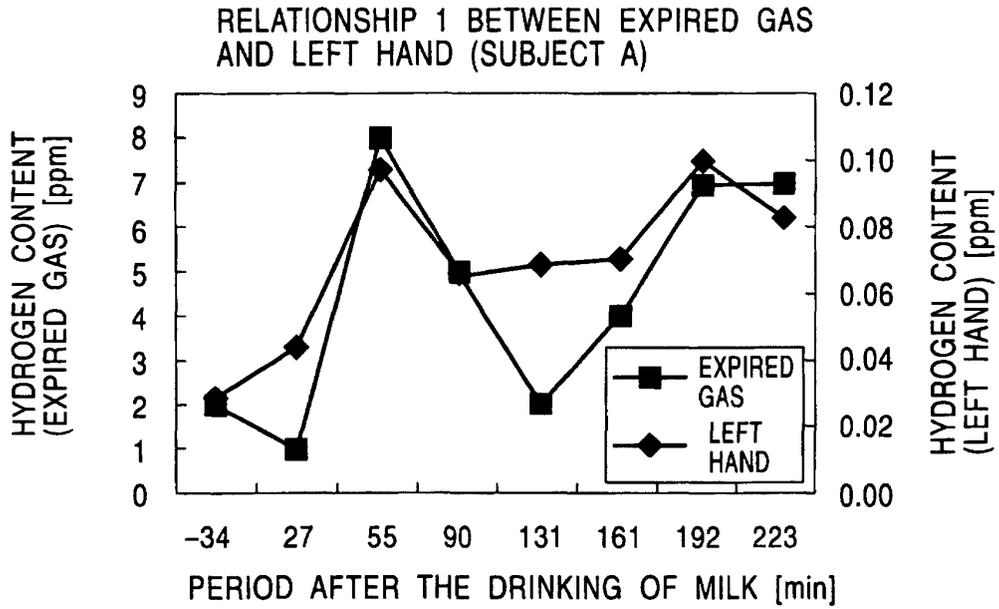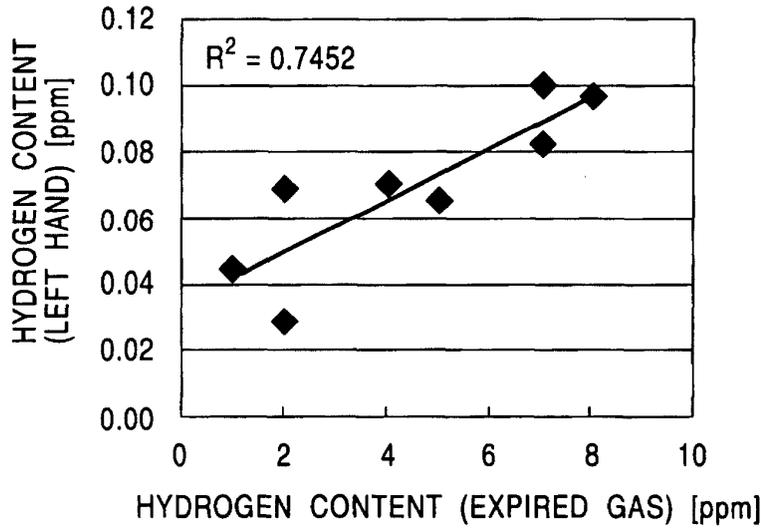

RELATIONSHIP 2 BETWEEN EXPIRED GAS AND LEFT HAND (SUBJECT B)


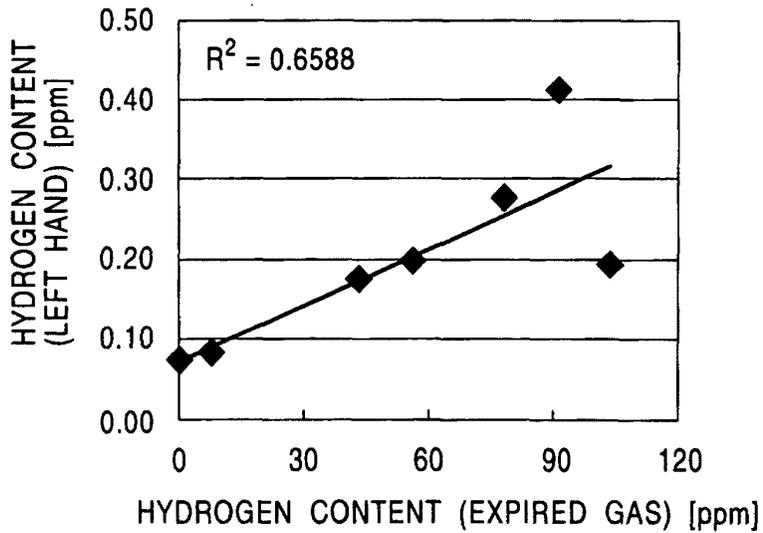


FIG. 12

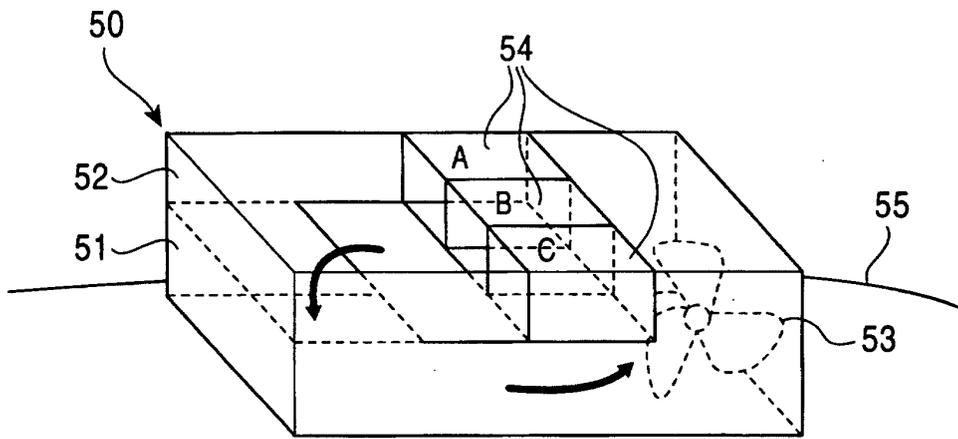

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11435

<p>A. CLASSIFICATION OF SUBJECT MATTER Int.Cl⁷ G01N1/22, A61B5/00, A61B10/00</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>																					
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) Int.Cl⁷ G01N1/00-1/44, A61B5/00-5/22, A61B10/00</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2002 Kokai Jitsuyo Shinan Koho 1971-2002 Jitsuyo Shinan Toroku Koho 1996-2002</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) JICST FILE (JOIS)</p>																					
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X Y</td> <td>JP, 3-47855, B2 (Hitachi, Ltd.), 22 July, 1991 (22.07.91), Full text; Figs. 1 to 3 & JP 59-88141 A Full text; Figs. 1 to 3</td> <td>1 2, 3</td> </tr> <tr> <td>Y</td> <td>US, 5782871, A (NEC Corp.), 21 July, 1998 (21.07.98), Full text; Figs. 1 to 12 & JP 2964942 B2 Full text; Figs. 1 to 10 & JP 9-224914 A Full text; Figs. 1 to 10 & DE 19708256 A1</td> <td>2</td> </tr> <tr> <td>Y</td> <td>JP, 2839865, B2 (K and S K.K.), 16 October, 1998 (16.10.98), Full text; Figs. 1 to 10 & JP 9-140674 A Full text; Figs. 1 to 10</td> <td>3</td> </tr> </tbody> </table> <p><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.</p> <table border="1"> <tr> <td>* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family</td> </tr> </table> <table border="1"> <tr> <td>Date of the actual completion of the international search 27 February, 2002 (27.02.02)</td> <td>Date of mailing of the international search report 12 March, 2002 (12.03.02)</td> </tr> <tr> <td>Name and mailing address of the ISA/ Japanese Patent Office</td> <td>Authorized officer</td> </tr> <tr> <td>Facsimile No.</td> <td>Telephone No.</td> </tr> </table>		Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X Y	JP, 3-47855, B2 (Hitachi, Ltd.), 22 July, 1991 (22.07.91), Full text; Figs. 1 to 3 & JP 59-88141 A Full text; Figs. 1 to 3	1 2, 3	Y	US, 5782871, A (NEC Corp.), 21 July, 1998 (21.07.98), Full text; Figs. 1 to 12 & JP 2964942 B2 Full text; Figs. 1 to 10 & JP 9-224914 A Full text; Figs. 1 to 10 & DE 19708256 A1	2	Y	JP, 2839865, B2 (K and S K.K.), 16 October, 1998 (16.10.98), Full text; Figs. 1 to 10 & JP 9-140674 A Full text; Figs. 1 to 10	3	* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	Date of the actual completion of the international search 27 February, 2002 (27.02.02)	Date of mailing of the international search report 12 March, 2002 (12.03.02)	Name and mailing address of the ISA/ Japanese Patent Office	Authorized officer	Facsimile No.	Telephone No.
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																			
X Y	JP, 3-47855, B2 (Hitachi, Ltd.), 22 July, 1991 (22.07.91), Full text; Figs. 1 to 3 & JP 59-88141 A Full text; Figs. 1 to 3	1 2, 3																			
Y	US, 5782871, A (NEC Corp.), 21 July, 1998 (21.07.98), Full text; Figs. 1 to 12 & JP 2964942 B2 Full text; Figs. 1 to 10 & JP 9-224914 A Full text; Figs. 1 to 10 & DE 19708256 A1	2																			
Y	JP, 2839865, B2 (K and S K.K.), 16 October, 1998 (16.10.98), Full text; Figs. 1 to 10 & JP 9-140674 A Full text; Figs. 1 to 10	3																			
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family																				
Date of the actual completion of the international search 27 February, 2002 (27.02.02)	Date of mailing of the international search report 12 March, 2002 (12.03.02)																				
Name and mailing address of the ISA/ Japanese Patent Office	Authorized officer																				
Facsimile No.	Telephone No.																				

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11435

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 3048554, B2 (K and S K.K.), 24 March, 2000 (24.03.00), Par. Nos. [0050] to [0051]; Figs. 8, 9 & JP 11-290280 A Par. Nos. [0050] to [0051]; Figs. 8, 9	4
A	JP, 11-318874, A (Takao TSUDA), 24 November, 1999 (24.11.99), Full text; Figs. 1 to 3 (Family: none)	1-4
A	JP, 6-119, B2 (Hitachi, Ltd.), 05 January, 1994 (05.01.94), Full text; Figs. 1 to 5 & JP 62-72321 A Full text; Figs. 1 to 5	1-6
A	JP, 2-1105, U (NEC Corp.), 08 January, 1990 (08.01.90), Full text; Figs. 1 to 3 (Family: none)	1-6

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11435

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Claims 1 to 3 relate to a skin permeable gas collector having a container with an opening part to be fitted closely to skin.

Claim 4 relates to a skin permeable gas collector having a connection part with a finger sack.

Claim 5 relates to a skin permeable gas collector having a cylindrical member with spiral groove and a cylindrical member seal member, and collecting skin permeable gas after the air sealed in the groove at a specified temperature is measured.

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

- Remark on Protest**
- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11435

Continuation of Box No. II of Continuation of first sheet (1)

Claim 6 relates to a skin permeable gas collector comprising a blowing fan and a measurement apparatus having a coloring reagent.