



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **26.01.2005 Bulletin 2005/04** (51) Int Cl.7: **C21D 7/06, B24C 1/10**

(21) Application number: **04020114.7**

(22) Date of filing: **11.01.2000**

(84) Designated Contracting States:
DE FR GB

(72) Inventor: **Soyama, Hitoshi**
Sendai-shi Miyagi-ken 981-0942 (JP)

(30) Priority: **13.01.1999 JP 594799**
12.11.1999 JP 32256199

(74) Representative: **Hall, Matthew Benjamin**
Frank B. Dehn & Co.
179 Queen Victoria Street
London EC4V 4EL (GB)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
00900168.6 / 1 170 387

Remarks:

This application was filed on 25 - 08 - 2004 as a divisional application to the application mentioned under INID code 62.


(71) Applicant: **Japan Science and Technology Corporation**
Kawaguchi-shi, Saitama-ken 332-0012 (JP)

(54) **Method and devices for refining and cleaning metal surfaces**

(57) This invention relates to a metal part and other surface modification method suitable for the machining industry in which shot peening is typically used to refine the surface of a metal part (to introduce compressive residual stresses, to enhance fatigue strength, to harden the workpiece) and for fields in which parts need be cleaned. According to the present invention, Workpiece W is placed within a first vessel which is filled with a fluid.

The first vessel is pressurized by controlling the flow rate of the fluid flowing in the first vessel from a Nozzle 4 distant from said workpiece on the surface and of the fluid flowing from the first vessel. Thus, the collapsing impact force of cavitation bubbles is increased so that the machined part will have its surface strengthened and cleaned by applying a peening effect to the surface of the part with said impact force.

FIG. 1

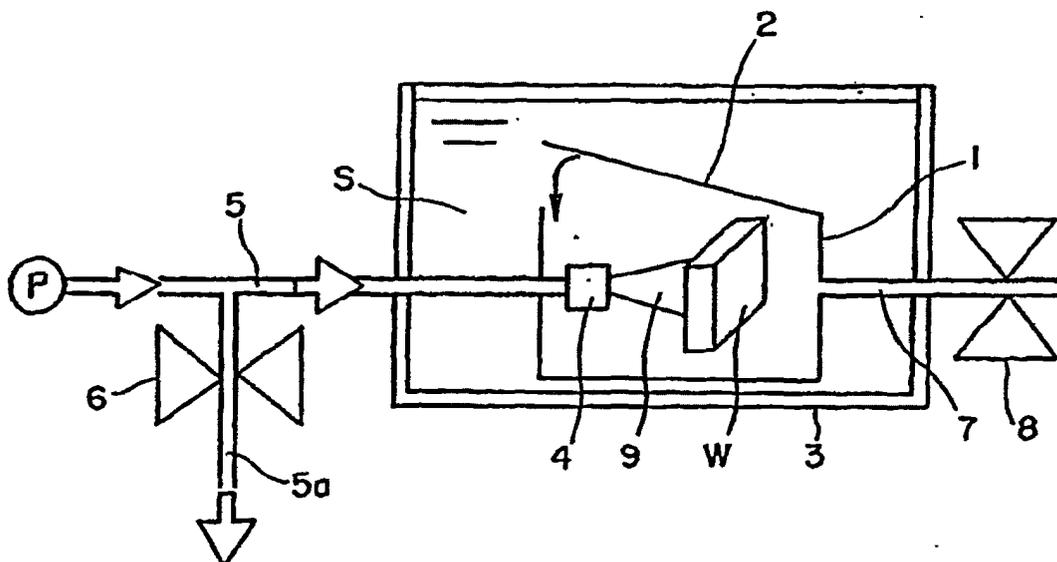

Description

Field of Art:

[0001] This invention relates to a method of refining (peening) metal part surfaces, such as for gears, springs, and molds, and to a device in which such method is implemented. More specifically, it relates to a metal part surface modification and cleaning method and the device using this method which is especially suitable for the machining industry where shot peening is typically used to improve metal part surfaces (e.g., to form compressive residual stresses, enhance fatigue strength, harden the workpiece) and for use in fields where parts need to be cleaned.

Background of the Art:

[0002] Conventionally, shot peening has been used to improve a variety of metal part surfaces to form compressive residual stresses, enhance fatigue strength, harden the workpiece, etc.

[0003] More recently, to impede stress corrosion cracking and protect materials in critical applications, such as a nuclear reactor vessel, against such cracking, there is also a technique available to suppress the residual stresses on the surface of a workpiece using cavitation generated by injecting water into water via a nozzle comprising two or more throats.

[0004] This technique to improve metal part surfaces, however, has been disclosed as if it utilized the collapsing impact force of cavitation. Nevertheless, it has been used practically while being confused with a "general water jet", which has a "cavitating jet" that is injected into the air.

[0005] In other words, the use of the "general water jet" has assumed that the surface peening level (introduced residual stress value, improved fatigue strength level, surface hardening grade, etc.) is dependent upon the pressure of the water injected. On such an assumption, an expensive high-pressure pump is employed to increase the pump discharge pressure. Nevertheless, satisfactory treatment capability has remained unattainable from the viewpoint of surface treatment. Furthermore, there have been some other problems awaiting solution. The factors which may govern a cavitation collapsing impact force in the surface modification process are not yet fully understood. And neither the collapsing impact force of the cavitation bubble nor the cavitation jet's surface treatment effect have been effectively utilized.

[0006] The inventor of the disclosure specified herein has therefore proceeded with studies on the collapsing impact force of the cavitation bubble and on the cavitating jet's surface modification phenomenon. As a result, it has been verified that the collapsing impact force of the cavitation bubble and the cavitating jet's surface modification effect (improving residual stresses, hard-

ening the workpiece and enhancing fatigue strength) are dependent upon not only the pressure of the pressurized water but also on the pressure of the water tank in which the workpiece is placed, that for the ratio of pressurized water pressure to water tank pressure an optimum value exists, that the cavitation collapsing impact force increases and decreases according to the temperature of the fluid, and that the cavitation collapsing impact force could be increased if the conditions referred to above were satisfied.

[0007] The present invention has been made, based on such knowledge referred to above. The workpiece to be treated is located in a tank filled with a fluid, such as water or oil. And the workpiece is treated by injecting a cavitating jet. To increase the cavitating jet's treatment capability, moreover, the tank in which the workpiece is located is pressurized and controlled by pressurization in a short time. Thus, the present invention provides a method and its device for peening and cleaning metal part or other surfaces, permitting a metal part to be improved on the surface.

[0008] Furthermore, to inject a cavitating jet onto the workpiece to be treated, a freely movable pressurizing vessel is provided for the present invention to comprise a method and device for peening and cleaning the surfaces of metal and other parts which are capable of treating the surface of a large-sized structure.

[0009] A pressurizing section is formed in a pipe to inject a cavitation jet. Thus, the present invention provides a method and device for peening and cleaning the surfaces of metal and other parts, which would allow the internal surface of the pipe to be treated and cleaned while moving the section along the internal surface of the pipe.

[0010] And the present invention aims to use the above-mentioned cleaning method and device to resolve the problems mentioned above.

Disclosure of the Invention:

[0011] To this end, the problem-resolving means employed in the present invention include:

A metal part and other surface modification and cleaning method, in which the part to be treated is placed within a first vessel which is filled with a fluid, which flows in the first vessel located at a distance from the surface of said part and flows from the first vessel, with this fluid's flow rates controlled to pressurize the first vessel to increase the collapsing impact force of the cavitation bubble, which is in turn used to apply a peening effect to the surface of the part to strengthen and clean the surface of the treated part.

A metal part and other surface modification and cleaning method, in which the part to be treated is placed within first vessel, which is filled with a fluid, and said first vessel is placed within a second ves-

sel which filled with a fluid to generate cavitation by injecting pressurized fluid from a nozzle distant from said part on the surface so that the collapsing impact force of the cavitation bubble may be used to strengthen and clean the surface of the treated part by applying a peening effect to the surface of the part.

A metal part and other surface modification and cleaning method, in which a first vessel is pressurized by controlling the flow rates of both fluids flowing in and out of said first vessel to increase the collapsing impact force of the cavitation bubble and strengthen and clean the treated part by applying a peening effect under such impact force.

A metal part and other surface modification and cleaning method, in which a substance with different acoustic impedance is inserted between said first and second vessels.

A metal part and other surface modification and cleaning method, in which the temperature of the fluid in said first vessel is controlled by controlling the temperature of the fluid that fills the space between said first and second vessels.

A metal part and other surface modification and cleaning method, in which the cavitating jet to be injected into a first vessel is sent to the cooling means from the first vessel and returned to a cavitating jet pump after being cooled by said cooling means.

A metal part and other surface modification device composed of a first vessel capable of accommodating the part to be treated, a lid that hermetically encloses the first vessel, a second vessel capable of accommodating said first vessel, a nozzle to inject a pressurized fluid into the pressurized fluid, a flow control valve to control the jet pressure from said nozzle and a pressure control valve to control the fluid pressure in the first vessel.

A metal part and other surface modification device provided with two or more said nozzles, with said second vessel configured to have a larger depth than the height of the first vessel.

A metal part and other surface modification device, in which a substance with different acoustic impedance is arranged between said first and second vessels.

A metal part and other surface modification device whose lid on said first vessel is closed with a specified force.

A metal part and other surface modification device provided with a means of heating or cooling the fluid in said second vessel.

A metal part and other surface modification device, in which said part to be treated is loaded on a carriage to carry it.

A metal part and other surface modification and cleaning method, in which a first vessel, which is filled with a fluid, is placed on the part to be treated

and the fluid is flowed into said first vessel to pressurize the first vessel in the interior, with the collapsing impact force of the cavitation foam increased by injecting the pressurized fluid to generate cavitation into said first vessel which is pressurized so that the surface of the part to be treated can be strengthened and cleaned by applying a peening effect to the part under said impact force.

A metal part and other surface modification and cleaning method, in which the part to be treated is installed in a first vessel, which is filled with a fluid, which is in turn flowed into said first vessel to pressurize said first vessel in the interior, with the collapsing impact force of the cavitation bubble increased by injecting the pressurized fluid to generate cavitation in said first vessel which is pressurized so that said impact force is used to strengthen and clean the surface of the treated part by applying a peening effect to the part.

A metal part and other surface modification and cleaning device equipped with a first vessel placed on the part to be treated, with a nozzle to inject a pressurized fluid into the first vessel, and with a nozzle to inject a cavitating jet into the pressurized fluid in the first vessel so that the collapsing impact force of the cavitation bubble can be used to strengthen and clean the part to be treated on the surface by applying a peening effect to the surface of the part.

A metal part and other surface modification and cleaning device composed of said first vessel, a nozzle to pour a pressurized fluid into first vessel, and a nozzle to inject a cavitating jet into the pressurized fluid in the first vessel.

A metal part and other surface modification and cleaning device configured to control the pressure of the fluid in said first vessel by a fluid pressure regulator means such as a valve or the like.

A metal part and other surface modification and cleaning device, in which said part to be treated is immersed in the fluid in the second vessel.

A metal part and other surface modification and cleaning device, in which said part to be treated is placed above the surface of the fluid filled in the second vessel.

A metal part and other surface modification and cleaning device provided with a means of cooling the cavitating jet fluid to be poured into the first vessel.

A metal part and other surface modification and cleaning device, in which a pressurized fluid is poured into said first vessel to effectively surround the cavitating jet fluid.

A metal part and other surface modification and cleaning method, in which the part to be treated, such a pipe-shaped part or conduit, has a fluid-pressurizing chamber formed in the pipe or conduit to inject a cavitating jet into such pressurized fluid and to increase the collapsing impact force of the cavi-

tation bubble so that the internal surface of the pipe may be strengthened and cleaned by using such impact force to apply a peening effect to the internal surface of the pipe.

A metal part and other surface modification and cleaning device equipped with first and second members to form a fluid-pressurizing chamber in a pipe or conduit, with a nozzle to pour a pressurized fluid between said first and second members, and with a nozzle to inject a cavitating jet into said fluid pressurizing chamber, to strengthen and clean the surface of the treated part by using the collapsing impact force of the cavitation bubble to apply a peening effect to the surface of the part.

A metal part and other surface modification and cleaning device, in which either the first member or the second member is provided with a fluid pressure regulator means to regulate the fluid pressure in the fluid-pressurizing chamber.

A Brief Description of the Figures:

[0012]

Figure 1 is a block diagram of the surface modification device involved in a first embodiment of the present invention.

Figure 2 is a block diagram of the surface modification device involved in a second embodiment of the present invention.

Figure 3 shows the pressurization data relating to the present invention.

Figure 4 is a block diagram of the surface modification device involved in a third embodiment of the present invention.

Figure 5 is a block diagram of the surface modification device involved in a fourth embodiment of the present invention.

Figure 6 illustrates the method of pressing a workpiece against the first vessel in Figure 5.

Figure 7 is a block diagram of the surface modification device involved in a fifth embodiment of the present invention.

Figure 8 is a block diagram of the surface modification device involved in a sixth embodiment of the present invention.

Figure 9 shows the compressive residual stresses that have arisen from treating a steel using the present invention.

Figure 10 shows the compressive residual stresses that have arisen from treating a carburized gear material using the present invention.

Figure 11 depicts an example of workpiece hardening.

[0013] Based on the figures, the embodiment forms of the present invention are described in detail below.

[0014] Figure 1 is a block diagram of the metal part

and other surface modification device involved in the first embodiment.

[0015] In Figure 1, 1 is the first vessel, which permits a workpiece to be delivered and enter with ease, being configured to be hermetically sealable by means of a Lid 2, to reform the surface of the workpiece.

[0016] A second vessel 3 which is capable of accommodating same first vessel 1, and is formed to have a larger depth than the height of the first vessel so that it can form appropriate Space S in the periphery of the first vessel.

[0017] 4 is the nozzle to inject a cavitation jet into the first vessel 1.

[0018] 5 is the conduit to supply the nozzle with a high-pressure fluid from the first vessel 1.

[0019] 6 is a control valve to regulate the high-pressure fluid flow rate.

[0020] 7 is a conduit, through which the fluid is drained from the first vessel 1.

[0021] 8 is a pressure control valve located in said conduit to regulate the pressure in the first vessel 1.

[0022] The first vessel 1 may be provided with two or more nozzles. It is preferable, moreover, that Flow Control Valve 6 is located in a branched Conduit 5a rather than directly in Conduit 5 to couple a High-pressure Pump P and the Nozzle 4.

[0023] Workpiece W is placed within the hermetically sealable the first vessel 1 which is filled with a fluid, such as water or oil, allowing the workpiece to be delivered and enter, with the space between the first vessel 1 and the second vessel 3 being filled with a fluid, such as water or oil.

[0024] Said Flow Control Valve 6, Pressure Control valve 8 and Pump P are coupled with an electronic control device which is not illustrated. And they are controlled to attain an optimum pressure, based on a signal from a pressure/temperature sensor which is not illustrated.

40 Specific Action (operation) in Said Embodiment Forms:

[0025] After being placed within the first vessel 1, Workpiece W is hermetically sealed with Lid 2 capable of being peened and closed. High-pressure water is injected from Nozzle 4 to generate Cavitation 9 around the jet so to hit the cavitation bubbles against Workpiece W. The collapsing impact force of the cavitation bubbles acts upon the surface of the workpiece, thereby bringing about a workpiece-hardening effect to the surface of the workpiece, an improvement of residual stresses and an enhancement of fatigue strength.

[0026] To increase the collapsing impact force of Cavitation Bubble 9, Flow Control Valve 6 is used to control the flow rate of the pressurized fluid flowing into the first vessel 1 from Nozzle 4 or Pressure Control valve 8 is used to control the flow rate of the fluid flowing from the first vessel to control the pressure of the fluid pressurized in first vessel.

[0027] If the first vessel 1 has any portion in gaseous phase, moreover, pressurization will require a certain time because the gaseous-phase portion is compressed with the pressurized water. In this embodiment form, therefore, the second vessel 2 has its depth increased so that the first vessel 1 can be pressurized in a shorter time. And the pressure of the fluid filled in the second vessel 3 is used to keep a specified pressure applied to the first vessel. This permits the first vessel 1 to be pressurized in a shorter time while allowing the gaseous phase portion in the first vessel to be reduced to the minimum possible in a short time.

[0028] As referred to above, the present invention is capable of minimizing the gaseous phase portion in the first vessel 1 to be pressurized. Consequently, it is possible to reduce the time required to pressurize the first vessel 1.

[0029] In a case in which the first vessel 1 has an optimum fluid pressure of 5 atmospheres, for example, it is assumed that the first vessel contains approximately 12 litres of air. Then, approximately 1 minute is required to pressurize the vessel by means of a high-pressure pump having a capacity of 10 liters per minute. Consequently, the time equivalent to the actual working time (several seconds thru several minutes, which could be reduced, depending upon the arrangement of the nozzle), would be wasted. With the present invention, the first vessel 1 is immersed beforehand in the fluid filling the second vessel. The air in the first vessel 1, therefore, can be reduced to one-tenth or less while enabling a reduction of treatment time to one-tenth or less. Furthermore, in proportion to the depth of the first vessel 1, a specified pressure is kept applied to the first vessel. In the above-mentioned case, for example, it is possible to reduce the pressurizing time by 100% because the pressurization would take zero time when the second vessel 3 has a water depth of 50 meters even if approximately 12 litres of air is stored in the first vessel 1.

[0030] In comparison with the case where the first vessel is not pressurized as referred to above, the present embodiment form allows for a successful achievement of desirable effects, such as a significant improvement of residual stresses, an enhancement of fatigue strength, a capability of inserting compressive residual stresses into the deep portion from the workpiece surface, higher efficiency (shorter time requirement), than the case without pressurization, together with the capability of hardening the surface of the workpiece.

[0031] Figure 3 shows the pressurization data. In the figure, A shows the case with pressurization and B without pressurization while X stands for the depth at which residual stresses may be improved. Compared with the case without pressurization, the depth in which compressive residual stresses penetrate the surface of the workpiece is increased twice thru 10 times or more with pressurization while the treatment time requirement is decreased by half thru one-tenth. (This value is attain-

able when the jet has a discharge pressure of 20 MPa, with a nozzle bore ranging from 0.4 to 0.8 millimeters. The larger the nozzle and the greater the discharge pressure, the more conspicuously effective the pressurization will be.)

[0032] The collapsing impact force of the cavitation bubble is also dependent upon the fluid temperature. With the second vessel 3 located in the periphery of the first vessel 1, and with a fluid temperature control unit added to the second vessel 3, the fluid in the first vessel can be kept at a constant temperature and controlled to a range of 30°C through 60°C, within which the cavitation bubbles come to have an optimum collapsing impact force. Unless the second vessel 3 is provided, the first vessel 1 will have a temperature rise, thereby damping the collapsing impact force of cavitation bubbles. At the same time, there are such hazardous possibilities that leakage may take place in the high-pressure pump, piping and/or the first vessel 1, or may turn liable to break.

[0033] With water applied, cavitation foams have a collapsing impact force maximized at a temperature of 50°C, intermediate between the boiling and melting points. In practical use, it would be hazardous if a high-pressure pump or piping had a high temperature (80°C or more) at which their resistance to pressure would show an extreme drop. In this sense, the first vessel 1 should preferably have a fluid temperature fall within a range of 30°C thru 60°C.

[0034] Installing the second vessel 3 allows for a reduction of the cavitation noise that takes place within the first vessel 1. Inserting a substance with different acoustic impedance the first vessel 1 and the second vessel will enhance the sound-proof (silencing) effect.

[0035] With the second vessel 3 installed, it is possible to eliminate the gaseous-phase portion (compressed gas) in the first vessel 1 as far as possible. Even if leakage should take place from the first vessel, it will be safe because the pressure in the first vessel instantaneously attenuates for few compressed portions exist and the fluid in the first vessel is non-compressive even if it leaks. If a gaseous phase portion should exist in the first vessel, it is hazardous because the portion will inflate, thereby letting the fluid continue jetting out through the leaking point.

[0036] Cavitation bubbles have a collapsing impact force dependent upon the air content of the fluid in the first vessel 1, too. If the fluid in the first vessel should have its air content increased as a result of exposure to the atmosphere, the cavitation bubble will have its collapsing impact force attenuated. In other words, the treatment capability of the cavitating jet will be decreased. Installing the second vessel 3, however, prevents the fluid in the first vessel from being exposed directly to the atmosphere. As a result, the fluid in the first vessel has its air content scarcely changed so that the cavitating jet can maintain nearly constant treatment capability.

[0037] Subsequently, the second embodiment of the present invention will be described, based on the figures.

[0038] Figure 2 is a block diagram of the metal part and other surface modification device involved in the second embodiment.

[0039] The device in the second embodiment has a shallower second vessel 3 than that in the first embodiment. And the second embodiment is configured so that the fluid will overflow at the upper edge of the first vessel while allowing the treatment to be performed just like the first embodiment.

[0040] In the second embodiment, it is necessary to pressurize the first vessel 1 in the interior. Similarly to the first embodiment, therefore, the second embodiment should have the Lid 2 closed so that the fluid may overflow through the clearance of the Lid 2. If a weight is placed on the Lid 2 of the first vessel, or a spring with a specified spring constant is used to couple the lid with the vessel, a resistance can be applied to the opening of the lid to mechanically pressurize the first vessel. This applied pressure is controllable by means of an electronic controller or the like.

[0041] The third embodiment of the present invention, furthermore, will be described while referring to Figure 4. In the figure, P is a fluid from the high-pressure pump, C a cavitating jet, D a lid to hermetically seal after inserting the workpiece, N a nozzle, W a workpiece and 6 and 10 flow control valves.

[0042] The third embodiment differs from the first and second embodiments in the method of draining the fluid from the first vessel 1. In other words, the third embodiment has the fluid discharged into the second vessel by way of Flow Control Valve 10. In addition, the fluid in the second vessel is drained from the second vessel to the exterior by way of Flow Control Valve 8. This configuration allows for an effective elimination of residual bubbles within the first vessel after cavitation forms have collapsed.

[0043] Subsequently, the fourth, fifth and sixth embodiments will be described, based on the figures.

[0044] The first, second and third embodiments referred to above need to have the workpiece entirely placed within a hermetically sealable vessel filled with a fluid, such as water or the like. It is necessary, therefore, to provide the first vessel 1, which is larger than the workpiece. It is difficult, therefore, to treat the surface of a long workpiece. Additionally, the first, second and third embodiments could not be applied to structures such as floor, road, bridge, and the like. In addition, they involve the problem of inability to treat the surface in the interior of a pipe or to clean it on the internal surface.

[0045] The fourth, fifth and sixth embodiments, therefore, are described herein. The fourth and fifth embodiments allow us to harden the surface of the workpiece, to improve residual stresses and to enhance fatigue strength, with the collapsing impact force of the cavitation bubble acting on the workpiece surface similarly to

the above-mentioned forms even if the first vessel 1 to be pressurized is smaller than the workpiece. In addition, a description will be given about the sixth embodiment, which permits the internal surface of a pipe to be treated.

[0046] Figure 5 depicts the first embodiment of the present invention. And Figure 6 is an extended block diagram of the first vessel in the fourth embodiment.

[0047] In Figure 5, 21 is the first vessel to improve the surface of the workpiece. It is configured to have a size large enough to partially cover the surface of Workpiece 22 as illustrated. The first vessel 21 is supported with Leg Members 30, at the lower part of which Rollers 31 and others are arranged as shown in Fig. 6 so that the first vessel can move onto Workpiece 22. Leg Members 30 are provided to straddle Workpiece 22. Inside the first vessel 21, Injection Nozzle 24 is arranged to inject Cavitating Jet 28 into the vessel. And the flowing path that communicates with Nozzle 24 is provided with Flow Control Valve 25. To pour a high-pressure fluid into the first vessel 21, Nozzle 26 is arranged inside the vessel. And the flowing path that communicates with Nozzle 26 is provided with Pressure Control Valve 27. The first vessel is provided with pumps which are not illustrated (centrifugal pump, vortex pump, etc.) to pour a high-pressure fluid (pressure 0.1 thru 10 kg/cm²) into the first vessel. This permits the vessel to maintain a specified pressure. In the figure, H stands for a flow leaking from the first vessel, G for the portion at which the first vessel has a surface blank, and a second vessel 29 that permits the workpiece to be delivered and enter freely.

[0048] In this instance, Leg Member 30 with Roller 31 is configured to support the first vessel 21. As required, however, it is possible to provide the first vessel at the lower part directly with Roller 31 movable over Workpiece 22. In either case, an appropriate clearance control means (e.g. magnet or the like) is provided to prevent the surface of Workpiece 22 and the first vessel 21 from opening too much, with the first vessel afloat due to an action of the high pressure poured into the vessel. It is possible, furthermore, to insert an elastic material, such as spring or the like, between Leg Member 30 and 21 or the first vessel so that the first vessel can be braced on the workpiece side.

[0049] The fourth embodiment referred to above has the action described below.

[0050] Workpiece 22 is arranged in the fluid in the second vessel 29 and the first vessel 21 is placed onto the surface of Workpiece 22. Under this condition, a pressurizing fluid is poured into the first vessel and Cavitating Jet 28 is injected from Nozzle 24 into the first vessel 21 to generate cavitation around the jet so that cavitation bubbles will strike Workpiece 22. In this stage, the fluid pressure in the first vessel and the pressure in Cavitating Jet 28 are controlled, respectively, with Pressure Control Valve 27 and with Flow Control Valve 25. The collapsing impact force of the cavitation bubble acts on the surface of the workpiece to bring about a hardening

effect on the workpiece surface, an improvement of residual stresses and an enhancement of fatigue strength. The fluid which has carried stains, furthermore, is discharged to the exterior through between the first vessel and the workpiece.

[0051] In this embodiment, Cavitating Jet 28 is generated in the pressurized fluid inside the small-sized first vessel 21, which is loaded on Workpiece 22 which is immersed in the fluid inside the second vessel to partially treat the workpiece. Consequently, it is possible to minimize that portion of the first vessel, which should be pressurized, so that the time required to pressurize the first vessel can be reduced to the minimum possible. Since the workpiece is partially treated sequentially, it is also possible to treat even a large-sized workpiece with ease.

[0052] In this embodiment, the fluid will leak between the first vessel 21 and Workpiece 22. It is necessary, therefore, to pour in a larger quantity of the pressurizing fluid than such leakage, with a pump other than the high-pressure one. Since pouring the fluid through the pump for such pressurization is not required to generate cavitation, an applicable pump may have a relatively low discharge pressure (discharge pressure 0.1 thru 10 kg/cm², or lower by 1/100 thru 1/50 of the discharge pressure for a cavitating jet pump). Since a certain level of flow rate is required, however, it is recommendable to employ a pump of different type (centrifugal pump, vortex pump, etc.) than a cavitating jet pump (generally a plunger pump, approximately 10 thru 1,000 kilograms per square centimeter). Usually, a cavitating jet pump has a flow rate of several litres per minute thru several ten litres per minute. It is difficult, therefore, to compensate for all the flow leaked from the first vessel pressed against the surface of the workpiece. A high-pressure fluid of a relatively low-pressure type other than the cavitating jet high pressure is poured into the first vessel.

[0053] As referred to above, this embodiment form has a significant feature in the sense that the interior of the first vessel is pressurized by pouring a high-pressure fluid, other than the cavitating jet high-pressure fluid, into small sized the first vessel. The fluid pressure in the first vessel, is also controllable by controlling the opening/closing valve attached to the vessel.

[0054] Next, the fifth embodiment is described with reference to Figure 7.

[0055] The fifth embodiment is the case where Workpiece 22 is arranged above the fluid surface without being immersed into the fluid in the second vessel 29. In this instance, the configuration is similar to that in Embodiment form 4, except that the second vessel has a water level lower than the surface of the workpiece. Included as one of this form's developments is that the first vessel is only arranged on the surface of the workpiece, with the second vessel eliminated. In Figure 7, furthermore, H stands for the flow of the leak from the first vessel.

[0056] The fourth and fifth embodiments above, are

also applicable to the workpiece carried as loaded on a carriage means, such as a belt conveyor or the like. For example, the workpiece is placed and moved to the bottom of Vessel 1 by means of such carriage means. With the carriage means stopped subsequently, the first vessel is moved down to accommodate the workpiece in the interior. Under this condition, a cavitating jet high-pressure fluid is poured into the first vessel so that the workpiece on the carriage means can be treated and cleaned similarly to each of the embodiment forms referred to above.

[0057] The sixth embodiment is now described.

[0058] The sixth embodiment Form 6 is the case where the internal surface of conduit formed into a pipe or a member is treated. In this instance, a first Member (1st plug) and a second Member (2nd plug) are provided inside a pipe (conduit) to treat the surface of the conduit between these two members.

[0059] In Figure 8, 41 is the pipe as a workpiece. Inside this Pipe 41, the first Plug 42 and the second Plug 43 are arranged at specified intervals by means of Connecting Rod 44.

[0060] The first Plug 42 is sealed tightly with liquid on the internal surface of the pipe and arranged to be freely sliceable. On this first Plug 42, Fluid Drain Port 45 is formed and provided with Valve 46 capable of blocking the port. Valve 46 is pressed against Port 45 by the bracing force of spring 47 or the like as illustrated. Once the fluid pressure in the interior has exceeded a specified level, the high-pressure fluid is discharged through Port 45. For valve formation, the valve of another form is usable as far as it is functioning identically.

[0061] The second Plug 43, furthermore, holds Pipe 48 to pour a pressurized fluid into the piping, and Pipe 49 to pour a high-pressure fluid for Cavitating Jet C. And the second Plug 43 is arranged to have a slight Clearance 50 against the internal surface of the pipe in the surroundings. Pipes 48 and 49, are provided with pressure and flow control valves similarly to the embodiment forms referred to above so that the fluid pressure supplied from each pipe can be regulated. In the figure, 51 is the stain attached to the pipe on the internal surface.

[0062] In this embodiment, the first Plug 42 and the second Plug 43, coupled by means of a connecting rod in the pipe, are arranged as illustrated to pour an intrapipe pressurization fluid between Plugs 42 and 43. While keeping both plugs at a specified fluid pressure, the high-pressure fluid for Cavitating Jet C is poured in to clean the interior of the pipe. With the cavitating jet striking the pipe on the internal surface, it is possible to treat the surface on the internal surface of the pipe. In the treatment process, the fluid between the first Plug 42 and the second Plug 43 is discharged together with stains through Gap 50 between the second Plug 43 and Pipe 41. Thus, the first Plug 42 and the second Plug 43 have their positions gradually moved by an appropriate means so that the pipe can be cleaned and surface-treated on the entire internal surface of the pipe. The

fluid pressure between the first Plug 42 and the second Plug 43, may be controlled by opening and closing those valves which are provided in either plug.

[0063] In this embodiment form, moreover, the first and second plugs are coupled by means of Connecting Rod 44. Nevertheless, a connecting string or the like may be also employed in the place of such connecting rod. In some circumstances, the first and second plugs may not need to be coupled by means of a rod or string. In this case, it is necessary to fasten first and second plugs inside the pipe by some appropriate fastening means, such as friction for or the like so that either plug will not move over the internal surface of the pipe due to the action of the high-pressure fluid during the treatment.

[0064] Figure 9 shows the compressive residual stresses that have arisen from treating with compressive residual stresses introduced into the tool (forging die material) employed in the present invention. In Figure 9, the material is SKD61, nozzle diameter 2 millimeters and injection pressure 30 MPa. With the first vessel pressurized (K in the figure), an enhancing treatment can be completed in 10 minutes. Without pressurizing the vessel (J in the figure), 150 minutes are required while compressive residual stresses remain at a level of approximately 60%.

[0065] Figure 10 depicts the compressive residual stresses that have arisen from treating with compressive residual stresses introduced to carburized gear material employed in the present invention. In Fig. 10, the nozzle has a diameter of 2 millimeters, with injection pressure 30 MPa and pressurizing pressure 0.32 MPa.

[0066] Figure 11 shows an example comparing the workpiece hardening, with nozzle diameter 2 millimeters, injection pressure 30 MPa and treatment pressure 0.32 MPa.

[0067] As referred to above, the fifth embodiment requires the pressurizing of a first vessel smaller than that of the workpiece. Even the surface of a long steel plate, a large-sized die or the like, which cannot be placed within the first vessel, can be treated with ease. The present process, moreover, is applicable to floor cleaning by a cavitating jet. Additionally, the pressurizing water to be poured into the first vessel may be provided separately from the pressurizing water for cavitating jet so that the equipment can be set up at a lower cost without the necessity of providing a large-capacity plunger pump.

[0068] In the sixth embodiment, it is also possible to readily treat and clean the internal surface of a pipe, with a pressurizing section formed inside the pipe.

[0069] Described above are a variety of embodiment forms involved in the present invention. Nevertheless, flow control valves, pressure valves and the like are available in either automatic or manual control types. For fluid, either water or oil and the like are applicable. In each embodiment form referred to above, the fluid may have its temperature rise excessively because the

motor power may change into heat through a cavitating jet when it is poured into the first vessel. In this case, the pressure in the first vessel is utilized to cool down the fluid in the first vessel by sending the fluid to various cooling means known to the public other than the first vessel. Later, it is possible to re-supply the pump with the fluid again. If such a technique of feeding the fluid pressure in the first vessel to another cooling means is employed, it is unnecessary to provide a new pump to send the fluid in the first vessel to the cooling means so that the fluid can be readily cooled down in reality.

[0070] To pour the cavitating jet and pressurizing fluid into the first vessel, it is possible to arrange both cavitating jet nozzle and pressurizing water nozzle adjacently in each of the embodiment forms referred to above. In addition, a cavitating jet nozzle may be located at the center of the vessel and the pressurizing water pouring nozzles may be arranged to surround the former so that the cavitating jet can strike the workpiece as if it were surrounded by the pressurizing water.

[0071] In addition, it is possible to change the positional relations between cavitating jet nozzle and pressurizing water pouring nozzle to another form as required. It is possible, as might be required, to freely set the arrangement of the workpiece, based on its shape. As an example, it is possible to form the nozzle itself as an integral part of the vessel.

[0072] The present invention may be also embodied in any other forms without departing from its sprits and/or principal features. In this sense, the embodiment forms referred to above are given for the purpose of example and must by no means be interpreted in any restrictive sense.

35 Industrial Applicability

[0073] With the present invention as described in detail above, the workpiece is placed within first vessel, which is in turn hermetically sealed. Then, a high-pressure fluid is injected from a nozzle to generate the cavitation around the jet to strike cavitation bubble against the workpiece. Consequently, the collapsing impact force of the cavitation bubble acts on the workpiece, thereby bringing about the surface modification and cleaning effects, such as workpiece hardening, residual stress improvement, fatigue strength enhancement and so on. In a case in which a method of loading a first vessel on the workpiece is employed, it is also possible to improve the surface of a long steel plate, a large-sized die and the like. In addition, it is also applicable for cleaning the floor by a cavitating jet. Forming a pressurizing section in a pipe or conduct, will also permit the internal surface of the pipe to be treated and cleaned. If the poured water to pressurize the first vessel is provided apart from the cavitating jet pressurizing water, it is also possible to set up the equipment at a lower cost without the necessity of a large-flow plunger pump. Such excellent effects as referred to above could be brought about

by the present invention.

Claims

1. A metal part and other surface modification and cleaning method, in which the first vessel, which is filled with a fluid, is placed on the part to be treated and the fluid is flowed into said first vessel to pressurize the first vessel in the interior, with the collapsing impact force of the cavitation bubble increased by injecting the pressurized fluid to generate cavitation in said first vessel so pressurized so that said impact force may be used to treat, strengthen and clean the surface of the part by applying a peening effect to the part. 5
2. A metal part and other surface modification and cleaning method, in which the part to be treated is placed within the first vessel which is filled with a fluid, which is in turn flowed into said first vessel to pressurize the first vessel in the interior, with the collapsing impact force of the cavitation bubble increased by injecting the pressurized fluid to generate cavitation in said first vessel so pressurized so that said impact force may be used to treat, strengthen and clean the surface of the part by applying a peening effect to the part. 10
3. A metal part and other surface modification and cleaning device equipped with a first vessel placed on the part to be treated, with a nozzle to inject a pressurized fluid into the first vessel, and with a nozzle to inject a cavitating jet into the pressurized fluid in the first vessel to strengthen and clean the surface of the part to be treated by applying a peening effect to the surface of the part under the collapsing impact force of the cavitation foam. 15
4. A metal part and other surface modification and cleaning device according to claim 3 above, in which such device is an integral part of said first vessel, a nozzle to inject a pressurized fluid into the first vessel, a nozzle to inject a cavitating jet into the pressurized fluid in the first vessel. 20
5. A metal part and other surface modification and cleaning device according to either Claim 3 or 4 above, in which such device is so configured as to control the pressure of the fluid in said first vessel by such a fluid pressure regulator means as a valve or the like. 25
6. A metal part and other surface modification and cleaning device according to any of Claims 3 to 5 above, in which said part to be treated is immersed in the fluid in the second vessel. 30
7. A metal part and other surface modification and cleaning device according to claim 6 above, in which said part to be treated is placed above the surface of the fluid filled in the second vessel. 35
8. A metal part and other surface modification and cleaning device according to any one of claims 3 to 7 above, in which a means of cooling the cavitating jet fluid to be injected into the first vessel is provided. 40
9. A metal part and other surface modification and cleaning device according to any one of claims 3 to 8, in which a pressurized fluid is injected into said the first vessel as if it surrounded the cavitating jet fluid. 45
10. A metal part and other surface modification and cleaning method, in which the part to be treated, such as a pipe-shaped part or conduit or the like, has a fluid-pressurizing chamber formed within the pipe or conduit to inject a cavitating jet into such pressurized fluid and to increase the collapsing impact force of the cavitation bubble so that the internal surface of the pipe may be strengthened and cleaned by using such impact force to apply a peening effect to the internal surface of the pipe. 50
11. A metal part and other surface modification and cleaning device equipped with a first member and a second member to form a fluid-pressurizing chamber in a pipe or conduit, with a nozzle to inject a pressurized fluid between said first and second members, and with a nozzle to inject a cavitating jet into said fluid pressurizing chamber, to strengthen and clean the surface of the treated part by using the collapsing impact force of the cavitation foam to apply a peening effect to the surface of the part. 55
12. A metal part and other surface modification and cleaning device according to claim 11 above, in which either the first or second member is provided with a fluid pressure regulator means to regulate the fluid pressure in the fluid-pressurizing chamber.

FIG. 1

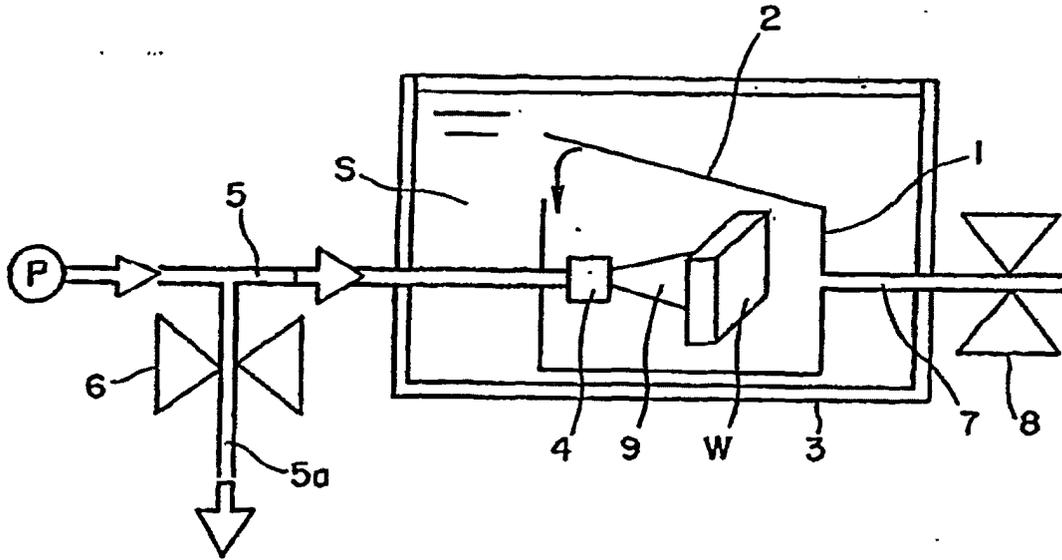


FIG. 2

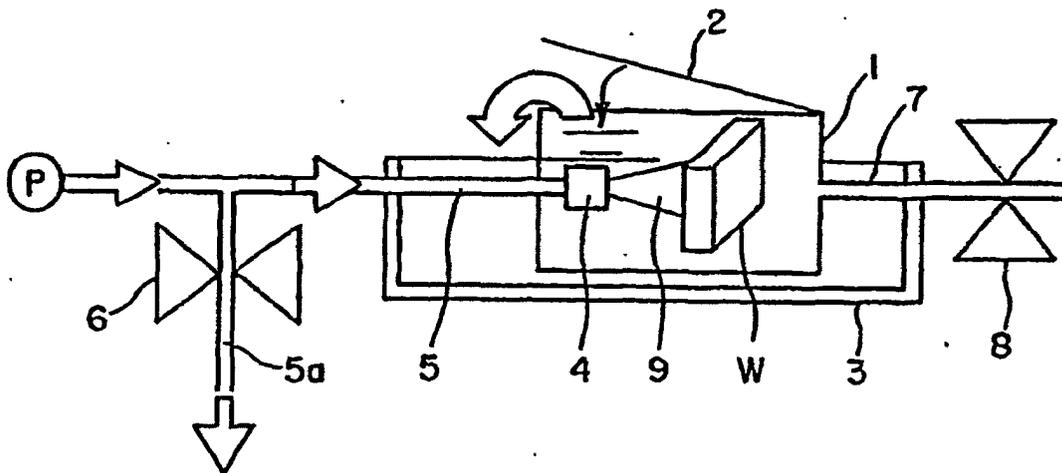


FIG. 3

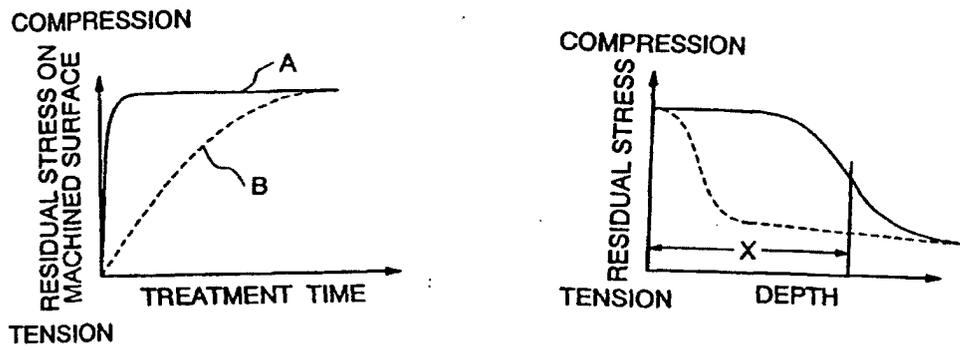


FIG. 4

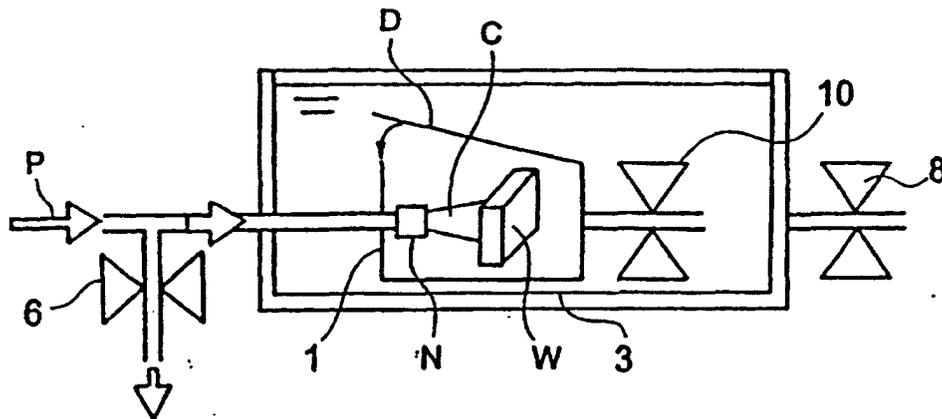


FIG. 5

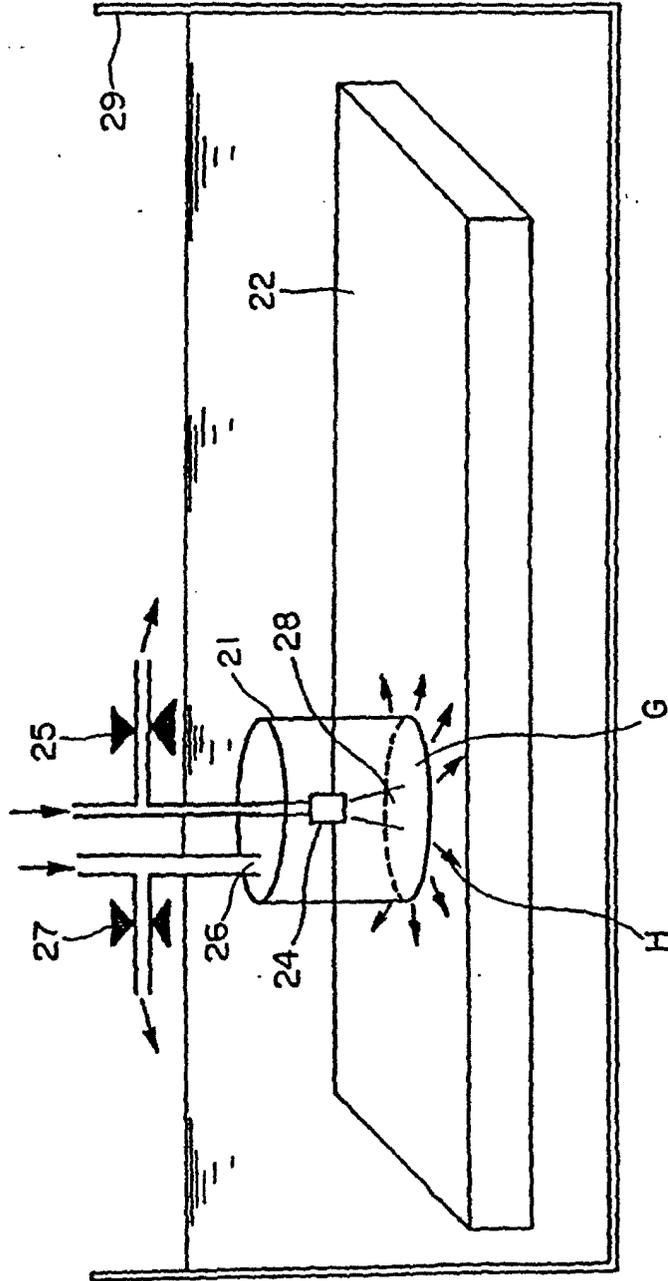


FIG. 6

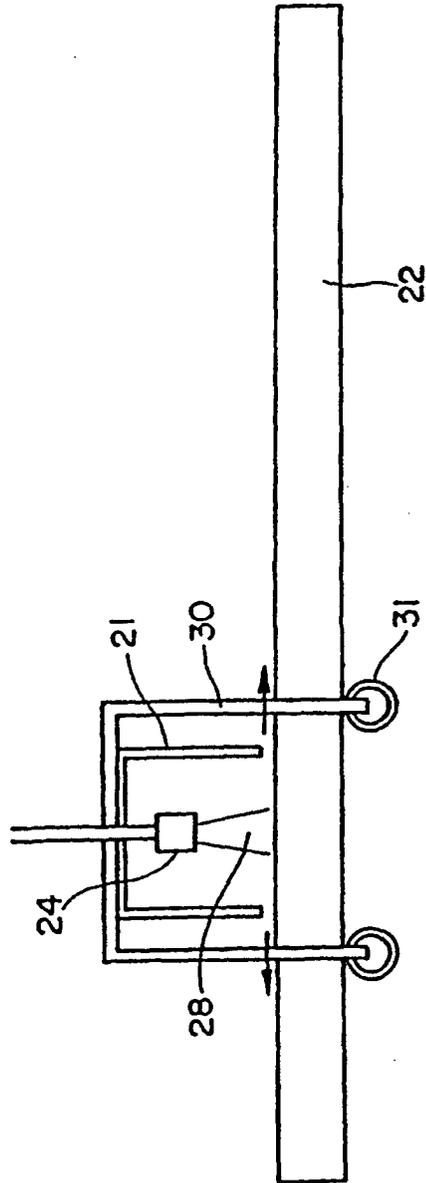


FIG. 7

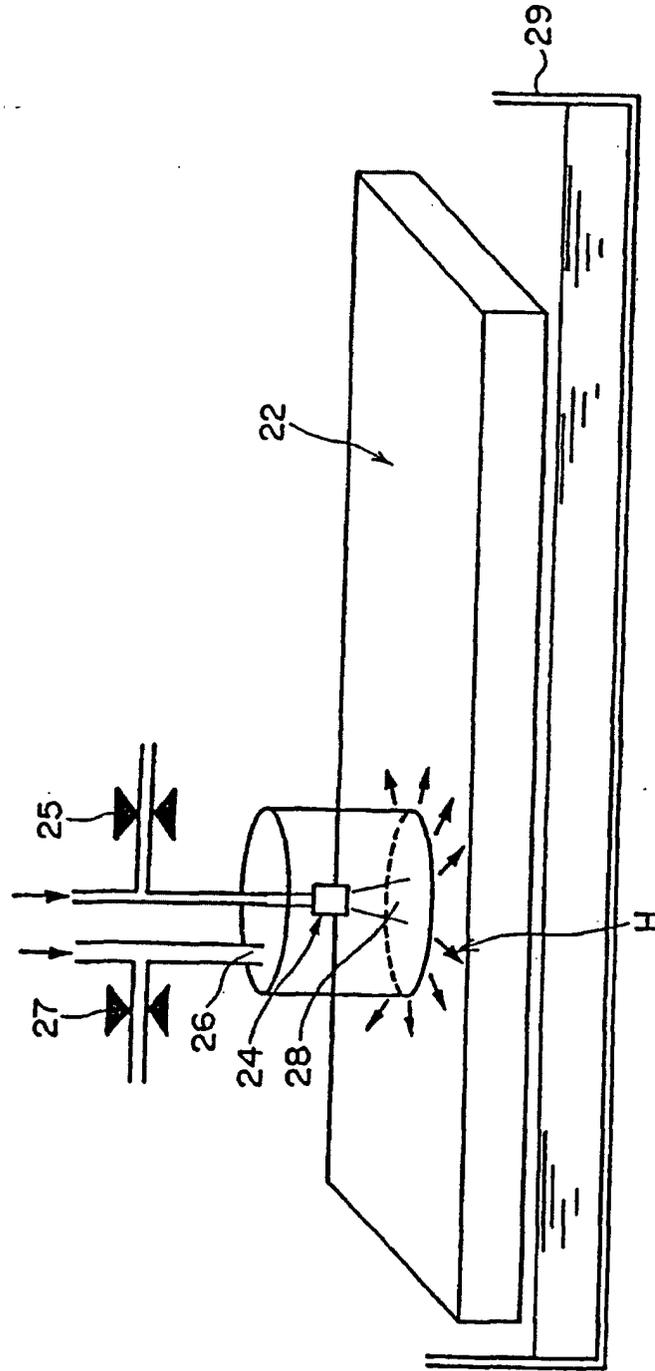


FIG. 8

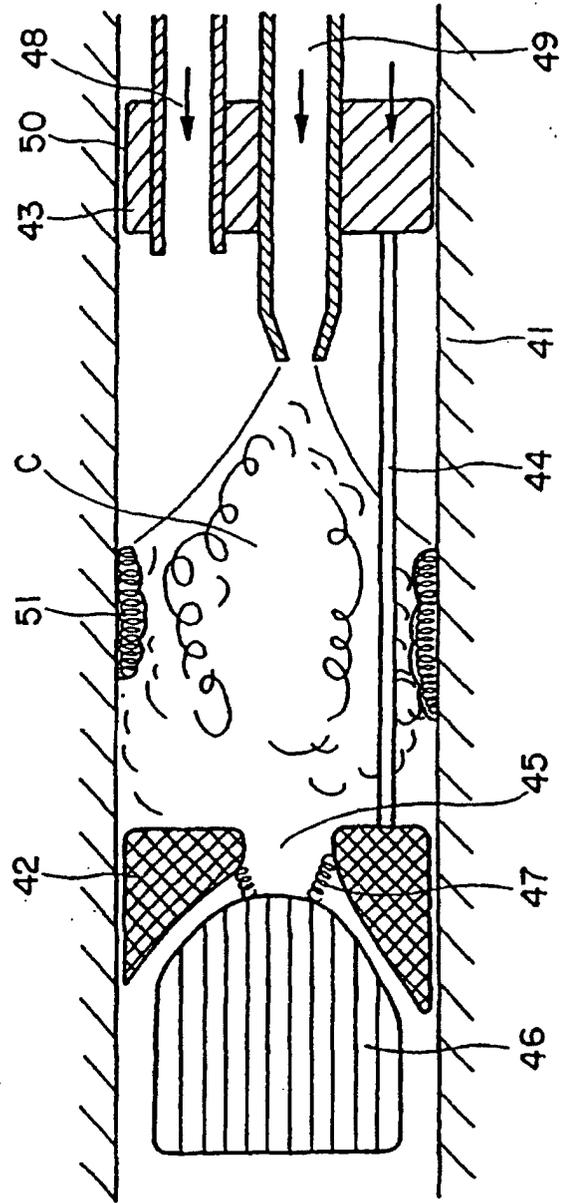


FIG. 9

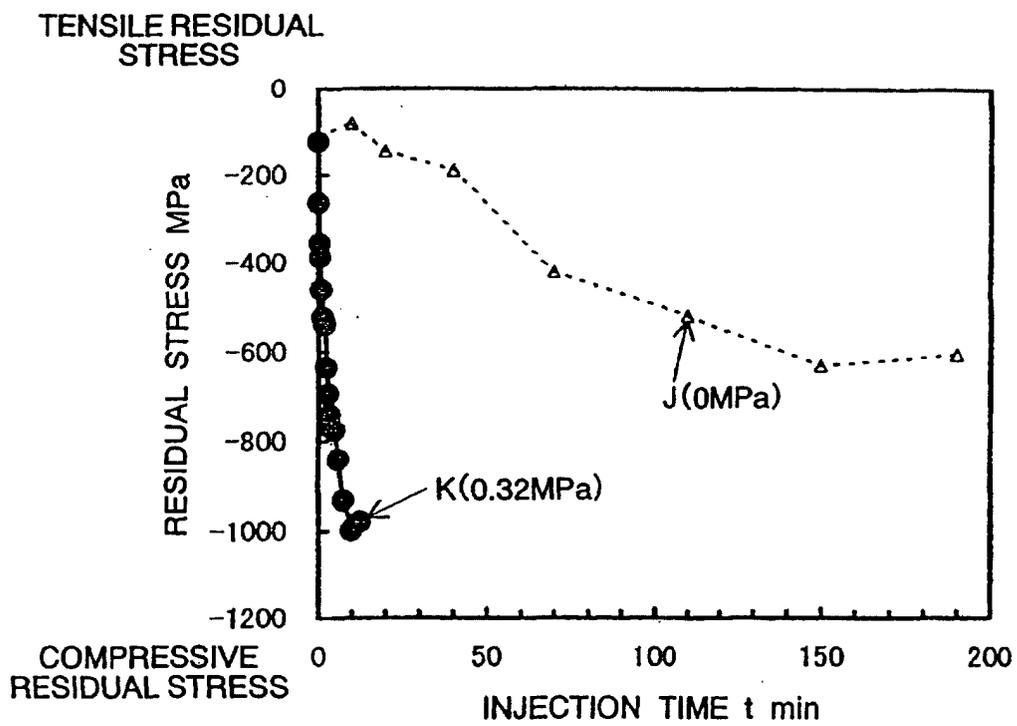


FIG. 10

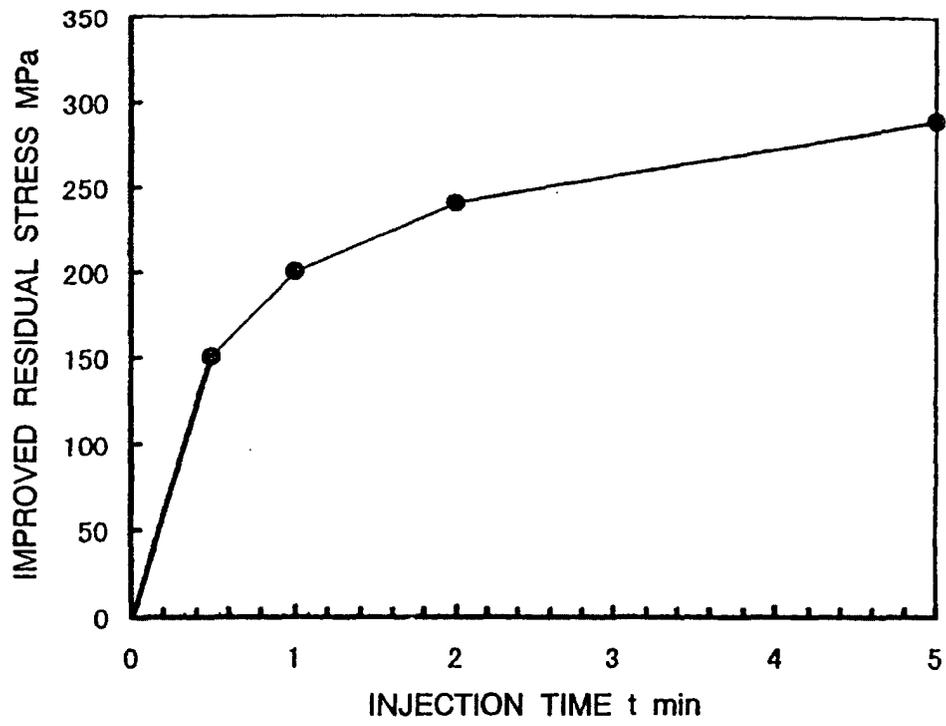


FIG. 11

MATERIAL	SURFACE BEFORE PEENING	SURFACE AFTER PEENING	HARDNESS
SKD61	633	800	VICKERS HV
SKD61	83	86	ROCKWELL SUPERFICIAL HR15N
SUP7	76	78	ROCKWELL SUPERFICIAL HR15N
SUS304	55	57	ROCKWELL SUPERFICIAL HR15N
TITANIUM	55	60	ROCKWELL SUPERFICIAL HR15N
S20C	51	61	ROCKWELL SUPERFICIAL HR15N



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 02 0114

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 04, 30 April 1996 (1996-04-30) & JP 7 328855 A (BABCOCK HITACHI KK; others: 01), 19 December 1995 (1995-12-19)	3,4	C21D7/06 B24C1/10
Y	* abstract *	5-9	
Y	----- PATENT ABSTRACTS OF JAPAN vol. 1996, no. 04, 30 April 1996 (1996-04-30) & JP 7 328857 A (BABCOCK HITACHI KK; others: 01), 19 December 1995 (1995-12-19) * abstract *	5-9	
A	----- PATENT ABSTRACTS OF JAPAN vol. 1997, no. 07, 31 July 1997 (1997-07-31) & JP 9 085625 A (HITACHI LTD; BABCOCK HITACHI KK), 31 March 1997 (1997-03-31) * abstract *	1-12	
A	----- PATENT ABSTRACTS OF JAPAN vol. 1997, no. 02, 28 February 1997 (1997-02-28) & JP 8 277482 A (SUPIIDE FUAMU CLEAN SYST KK; KUBOTA CORP), 22 October 1996 (1996-10-22) * abstract *	1-12	
A	----- PATENT ABSTRACTS OF JAPAN vol. 1996, no. 08, 30 August 1996 (1996-08-30) & JP 8 090418 A (KAWASAKI STEEL CORP), 9 April 1996 (1996-04-09) * abstract *	1-12	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C21D B24C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 November 2004	Examiner Clarke, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P/4C01)



European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 02 0114

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 04, 30 April 1996 (1996-04-30) & JP 7 328860 A (BABCOCK HITACHI KK; others: 01), 19 December 1995 (1995-12-19) * abstract *	1-12	
A	----- EP 0 218 354 A (WESTINGHOUSE CANADA INC) 15 April 1987 (1987-04-15) * column 2, line 30 - column 3, line 3; figure 4 *	1-12	
A	----- US 5 305 361 A (ENOMOTO KUNIO ET AL) 19 April 1994 (1994-04-19) * column 2, line 27 - column 3, line 22; figures 1,7 *	1-12	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 November 2004	Examiner Clarke, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 02 0114

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-11-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 7328855	A	19-12-1995	JP 2840027 B2	24-12-1998
JP 7328857	A	19-12-1995	NONE	
JP 9085625	A	31-03-1997	NONE	
JP 8277482	A	22-10-1996	JP 3143354 B2	07-03-2001
JP 8090418	A	09-04-1996	NONE	
JP 7328860	A	19-12-1995	NONE	
EP 0218354	A	15-04-1987	EP 0218354 A1	15-04-1987
			ES 2001668 A6	01-06-1988
			JP 62063614 A	20-03-1987
US 5305361	A	19-04-1994	JP 2774008 B2	09-07-1998
			JP 5195052 A	03-08-1993