



(19) **United States**

(12) **Patent Application Publication**

Matsufuji

(10) **Pub. No.: US 2006/0272245 A1**

(43) **Pub. Date: Dec. 7, 2006**

(54) **WALL CONSTRUCTION OF ARCHITECTURAL STRUCTURE**

(52) **U.S. Cl. 52/223.7**

(76) **Inventor: Yasunori Matsufuji, Fukuoka-shi (JP)**

(57) **ABSTRACT**

Correspondence Address:
JACOBSON HOLMAN PLLC
400 SEVENTH STREET N.W.
SUITE 600
WASHINGTON, DC 20004 (US)

A wall structure of an architecture is provided, which comprises an outer wall having resistance against earthquakes and wind and an inner wall relatively inferior in the earthquake-resistance and so forth, so that the outer and inner walls are properly combined to share design loads. The wall structure includes the outer wall (2) of bricklaying structure in which bricks (A—D) and metal plates (51) are stacked. Fasteners (60,62,63,70) extending through the bolt holes (7) of the bricks are tightened, and the vertically adjacent bricks are integrally connected with each other under prestress of the fasteners. The inner wall (3) is constructed inside of the outer wall, and the shear reinforcement member (10,20) connects the inner and outer walls with each other. The inner wall is constructed by a dry type of construction method, which can support a permanent vertical load such as a roof load. A temporary horizontal load acting on the inner wall, such as a seismic force, is transmitted to the outer wall by the shear reinforcement member.

(21) **Appl. No.: 10/548,306**

(22) **PCT Filed: Sep. 4, 2003**

(86) **PCT No.: PCT/JP03/11288**

(30) **Foreign Application Priority Data**

Mar. 6, 2003 (JP) 2003-60551

Publication Classification

(51) **Int. Cl.**
E04C 5/08 (2006.01)

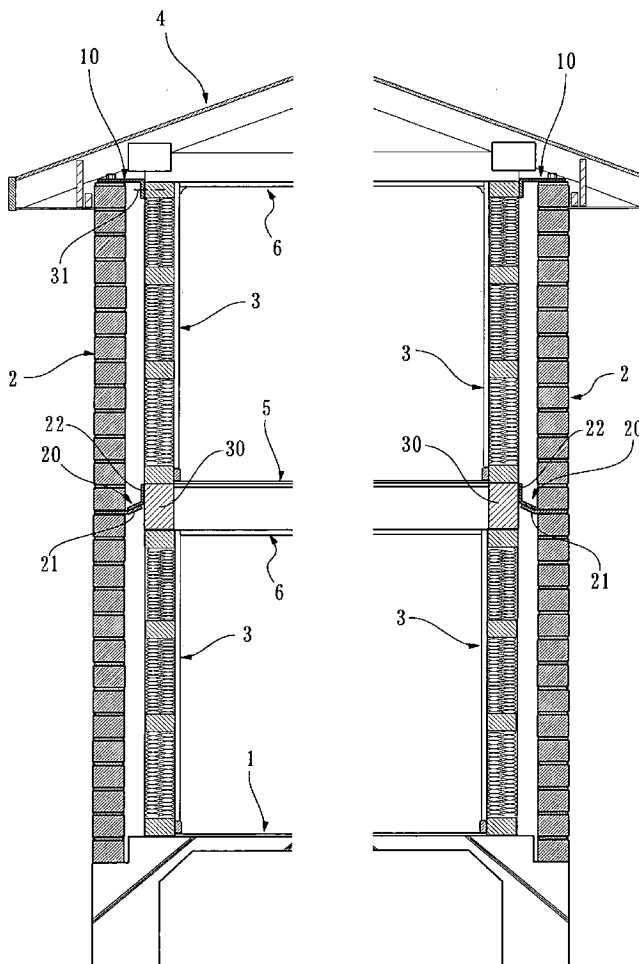


FIG.1

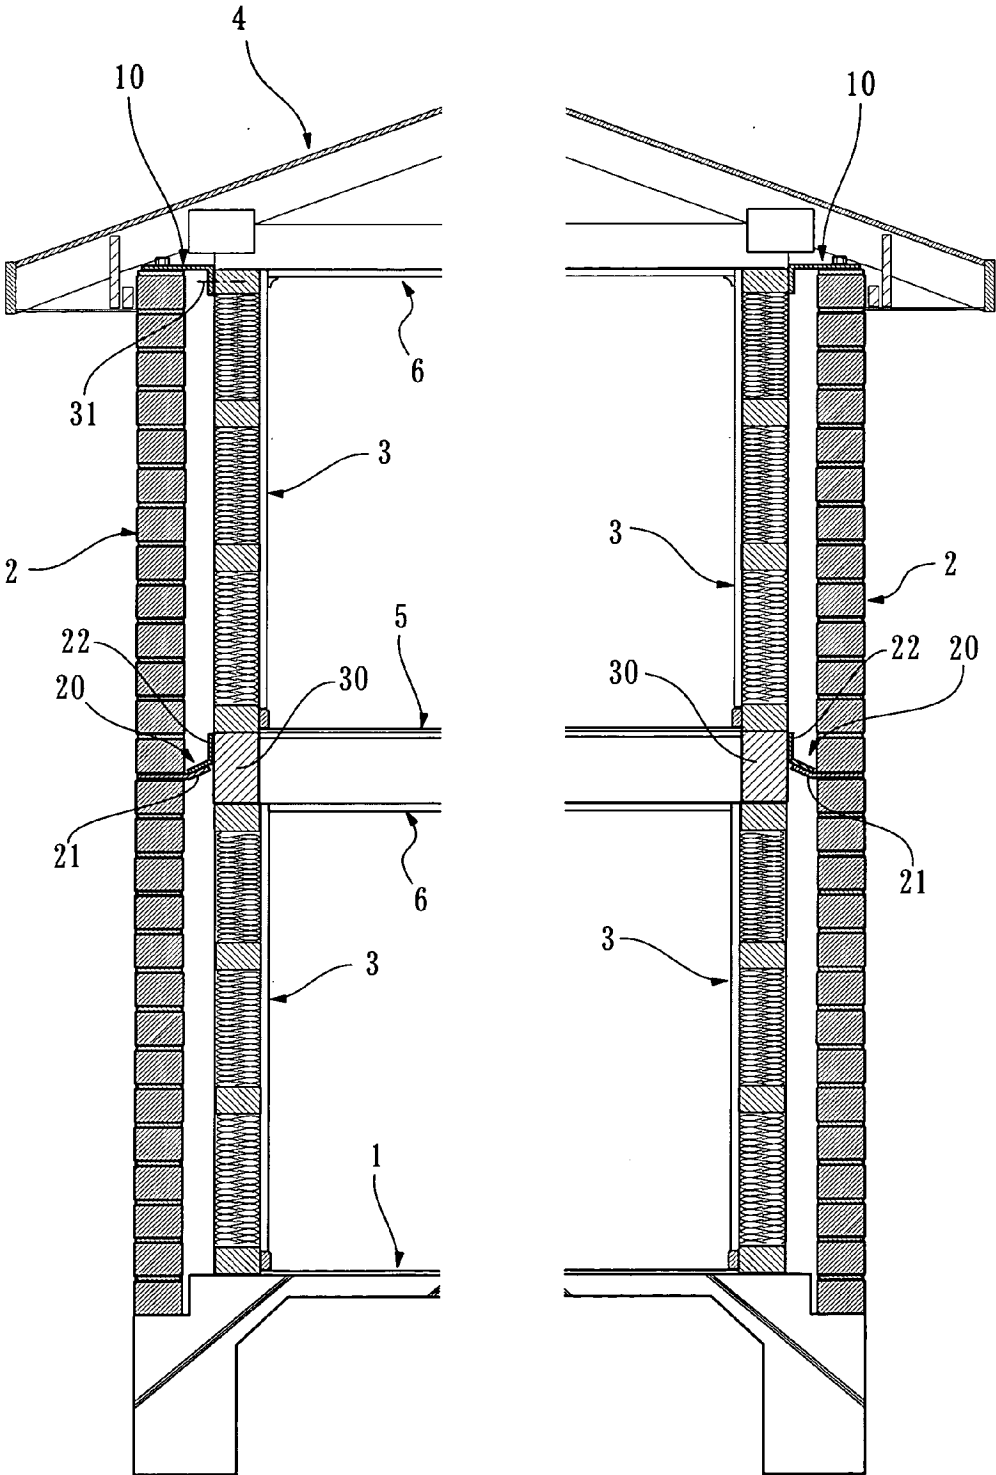


FIG. 2

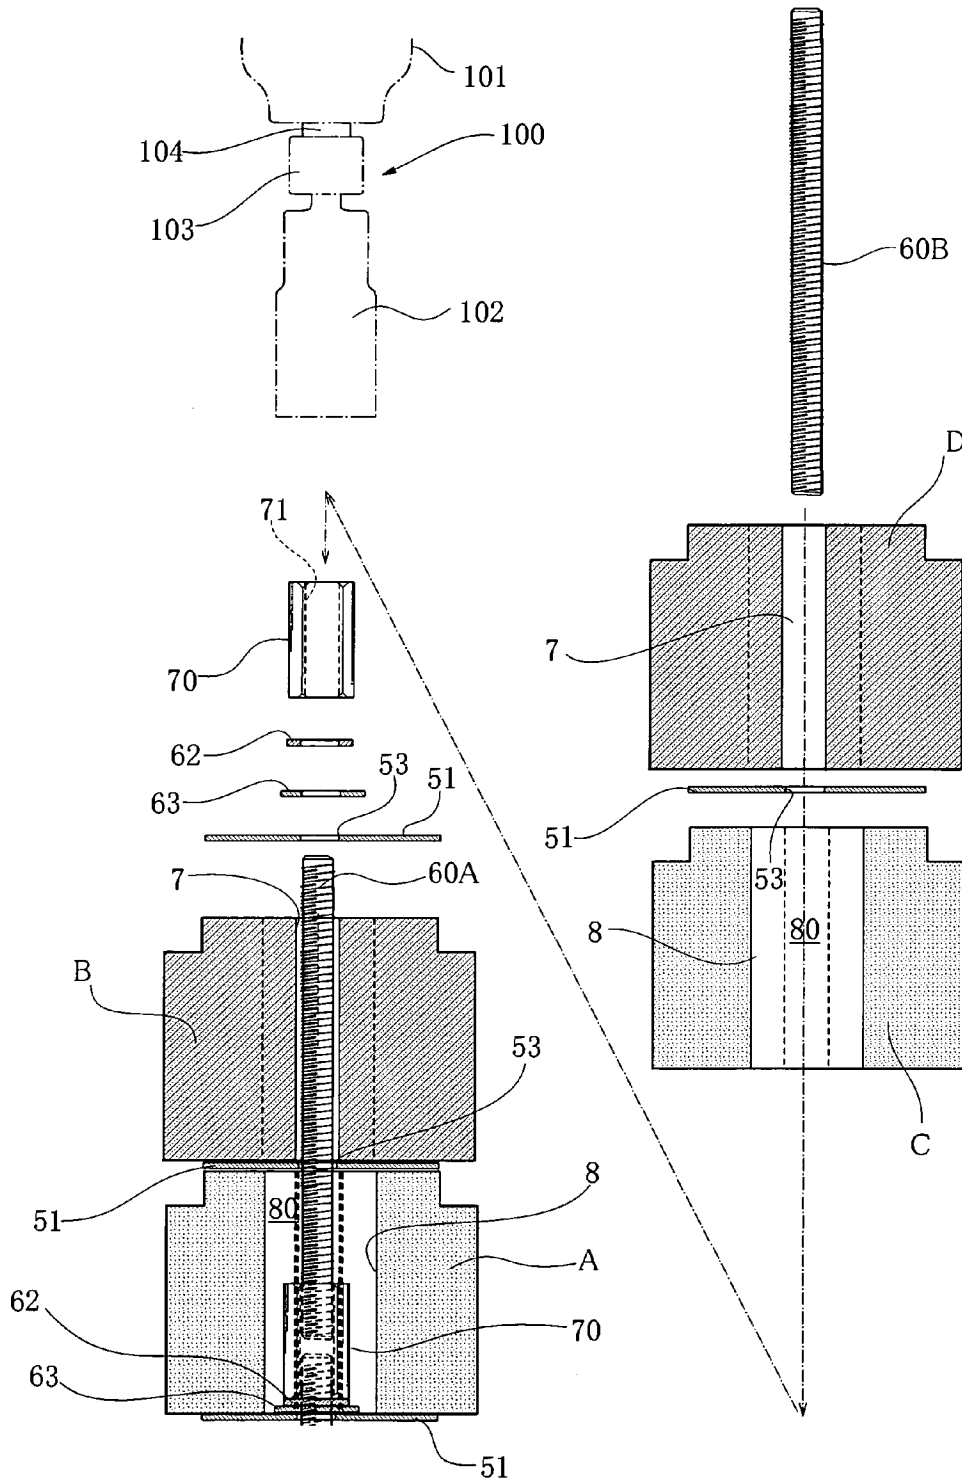


FIG.3

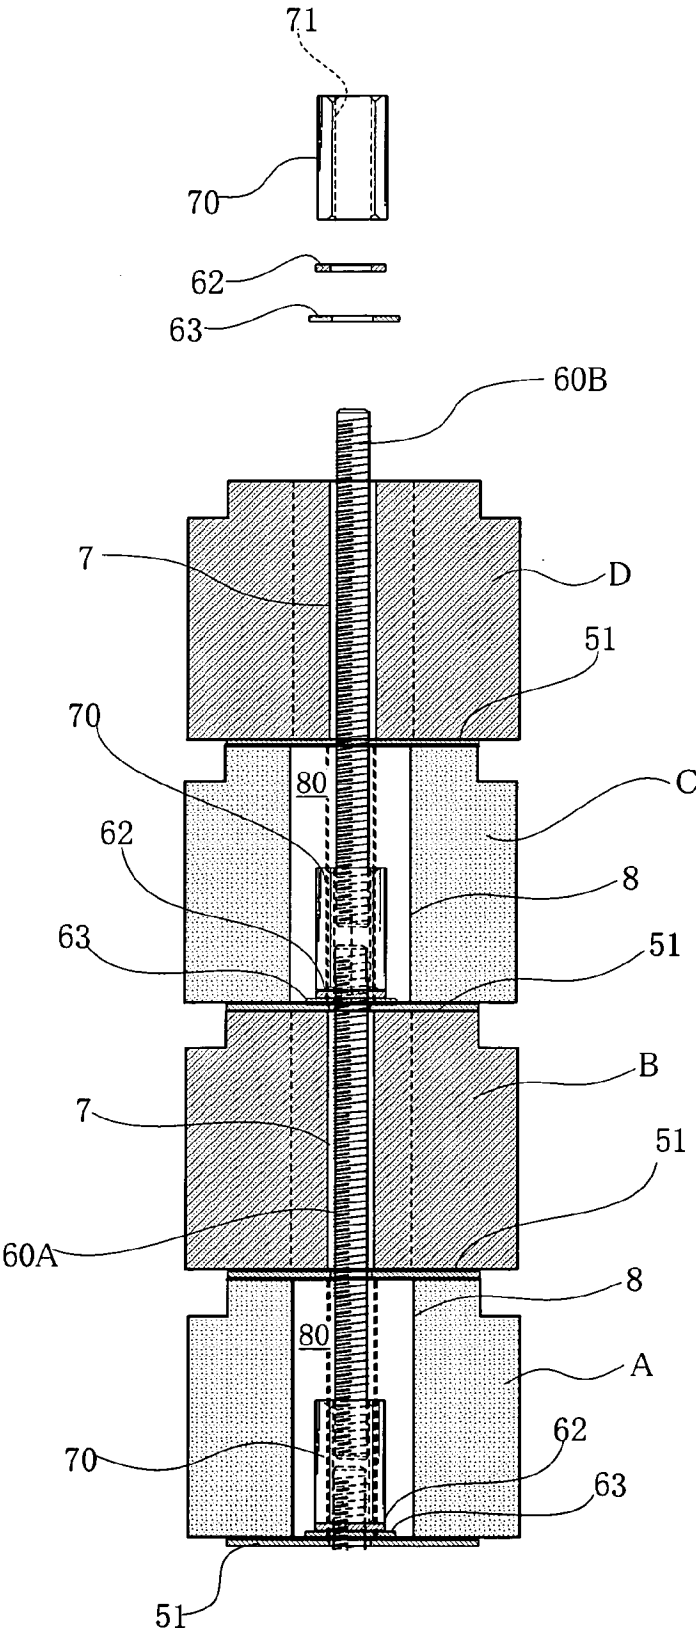


FIG. 4

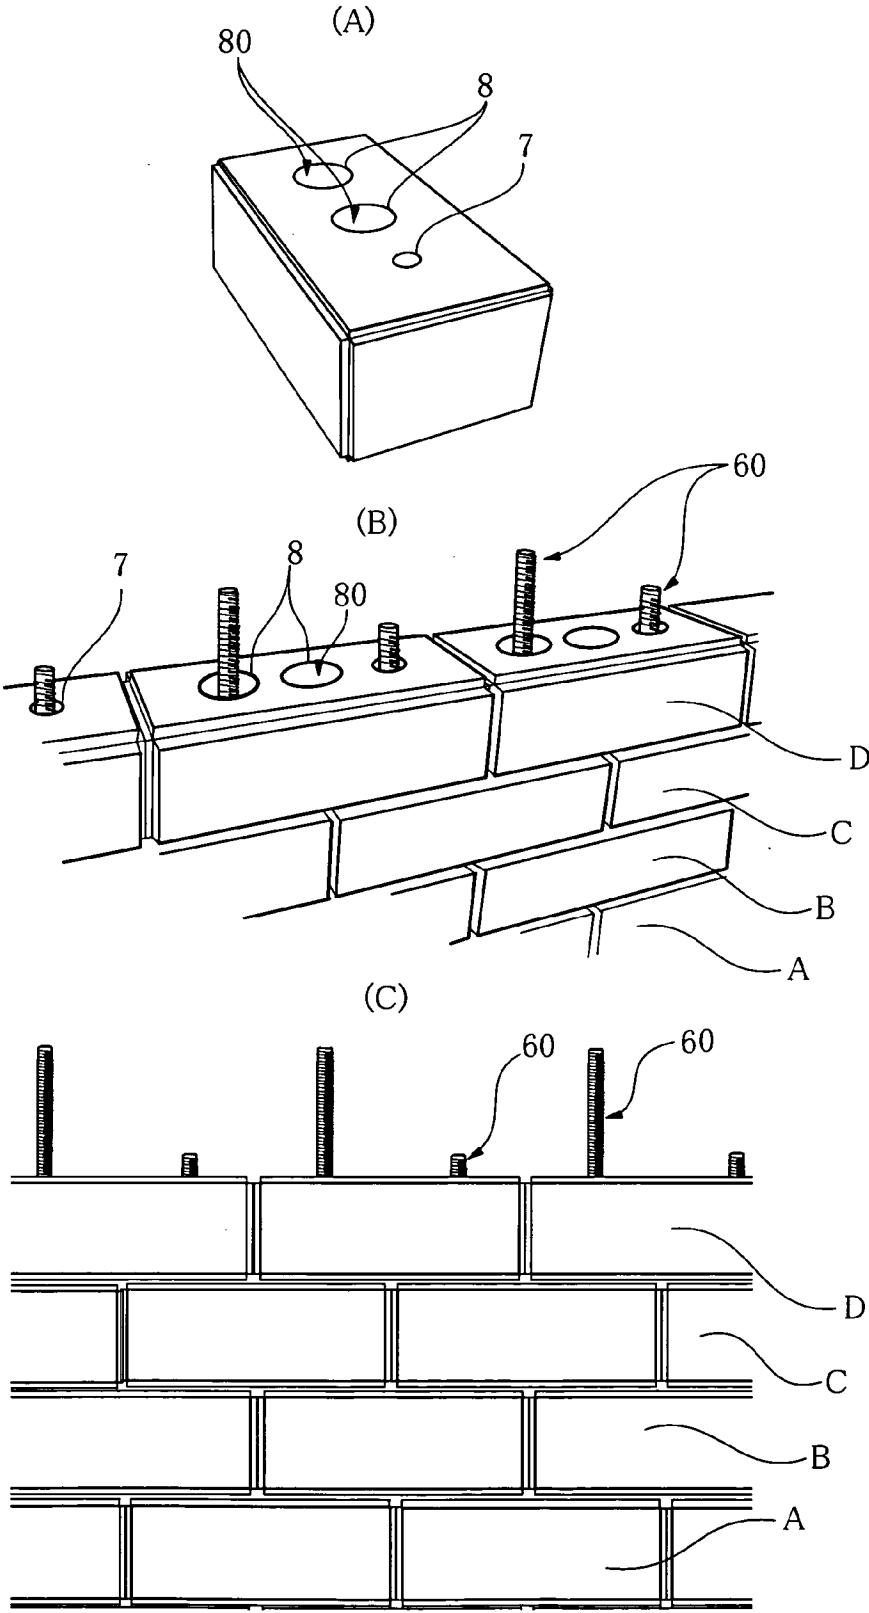


FIG. 5

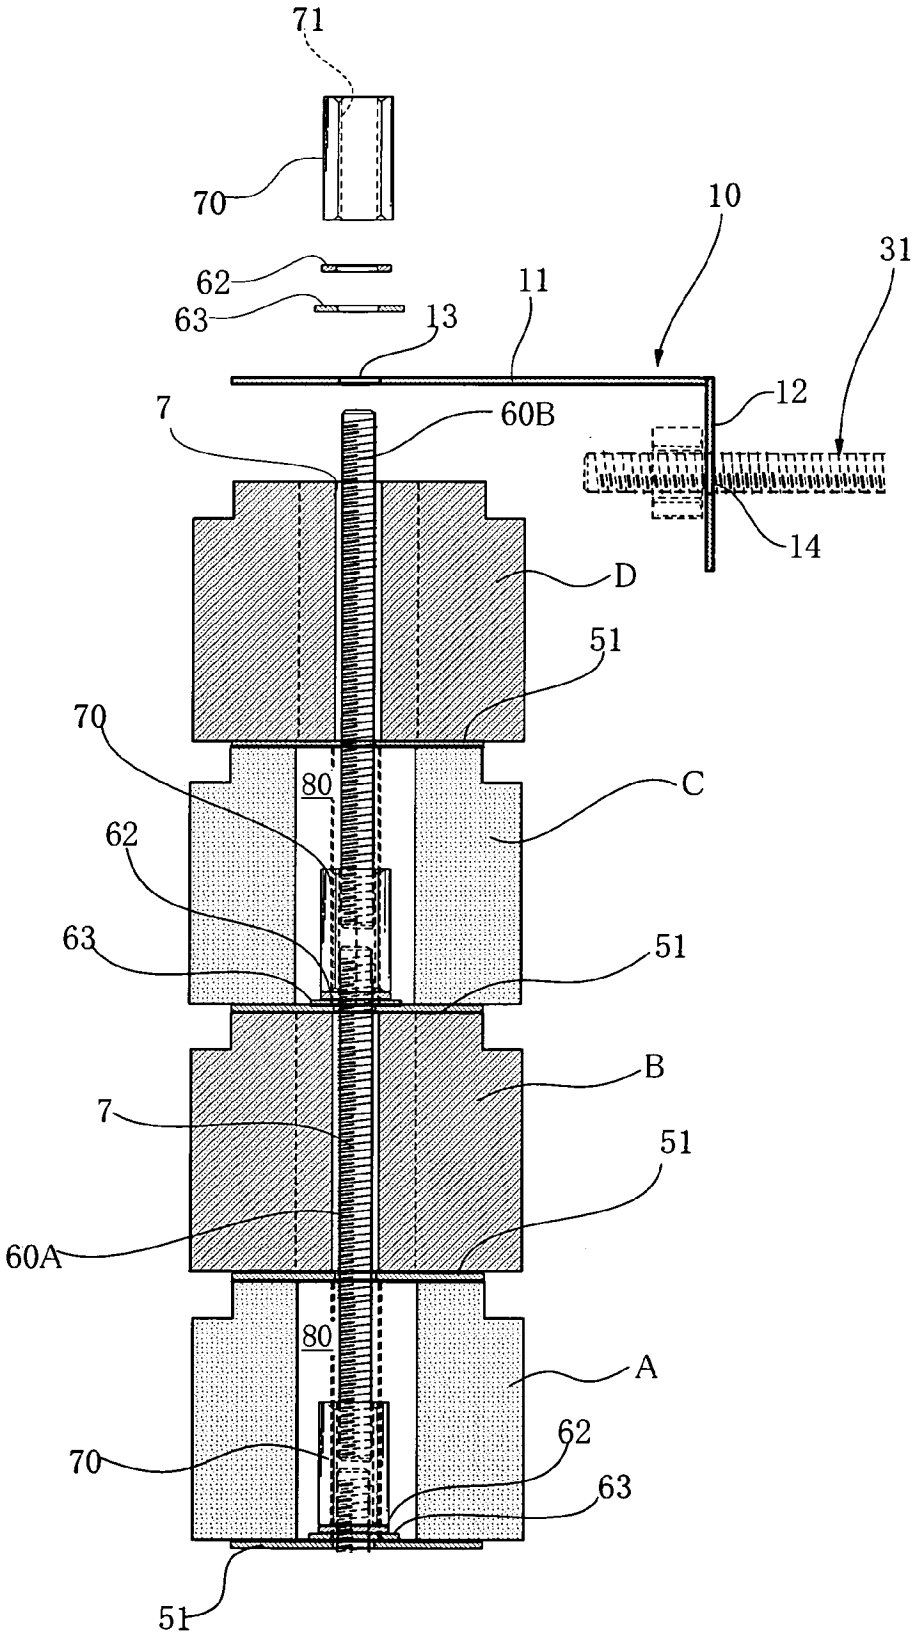


FIG. 6

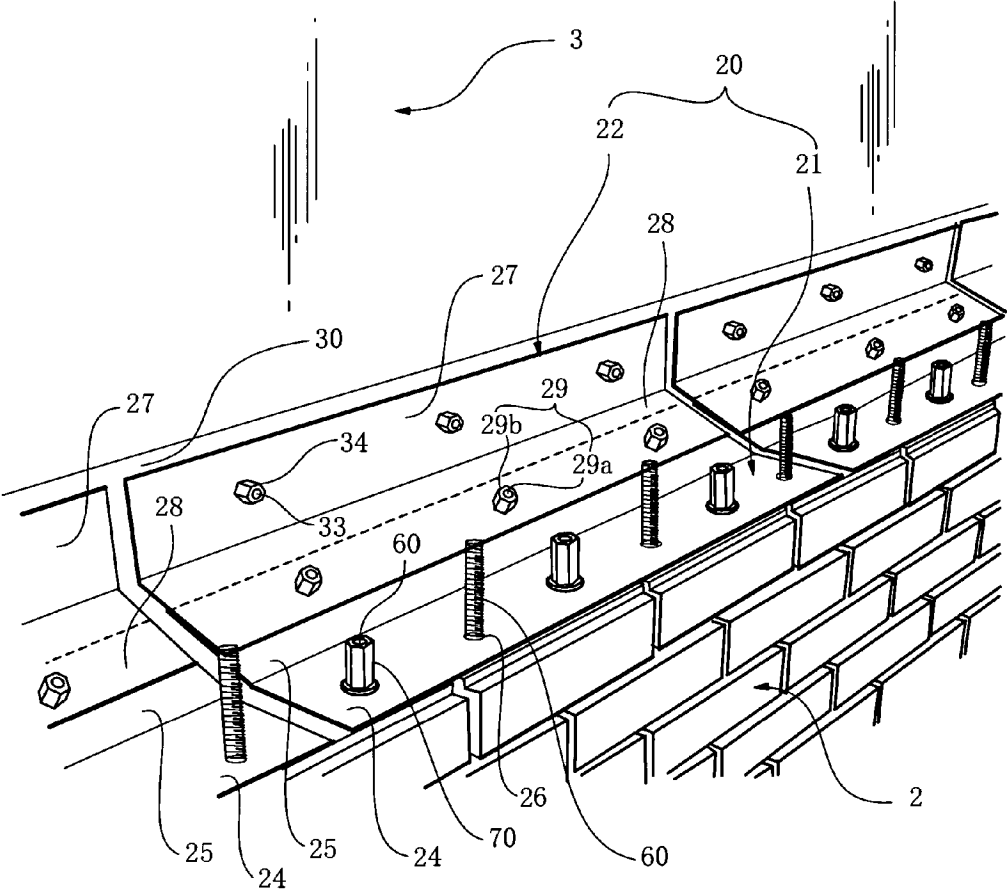


FIG.7

**Loading Hysterisis Curve
Angle of Shear Deformation Δ/h**

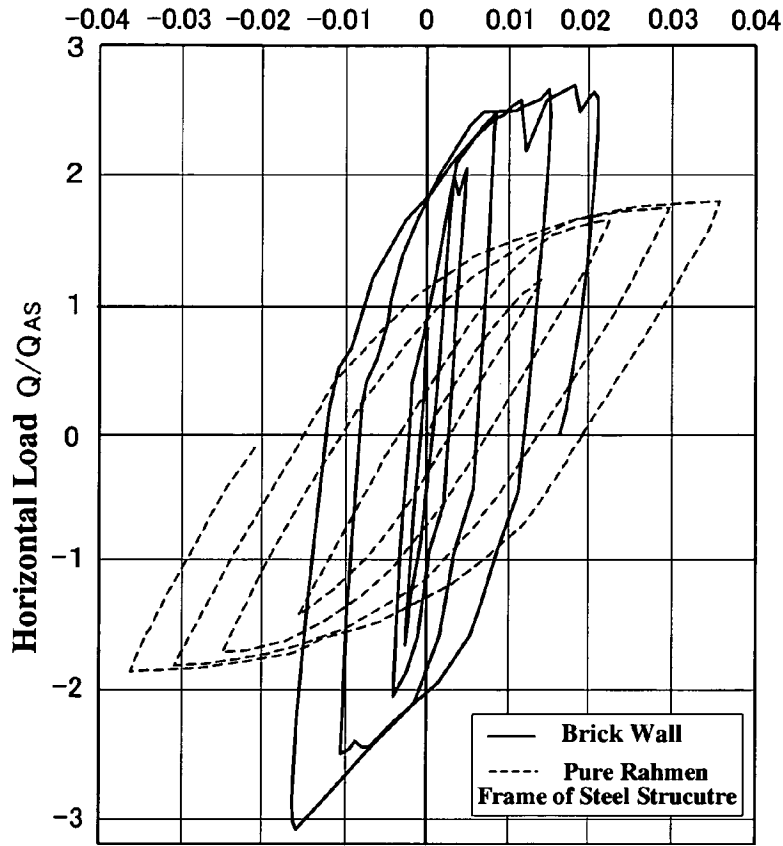


FIG.8

Relation between Bending Unit Stress and Angle of Deformation

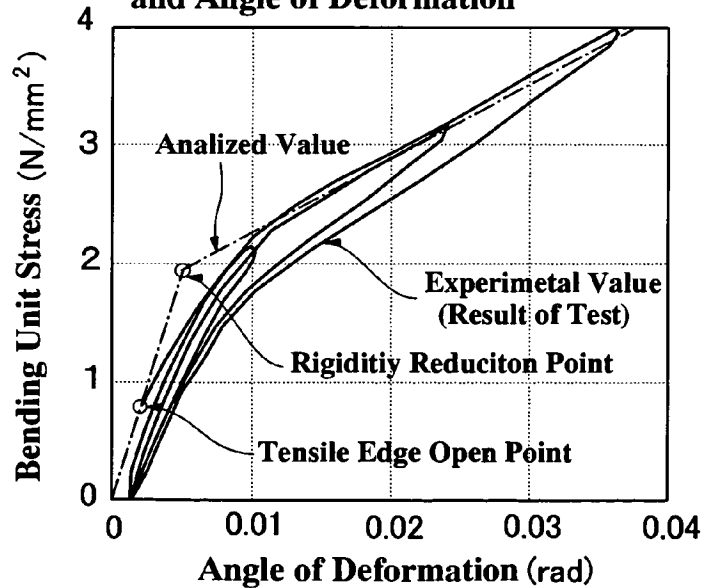


FIG.9

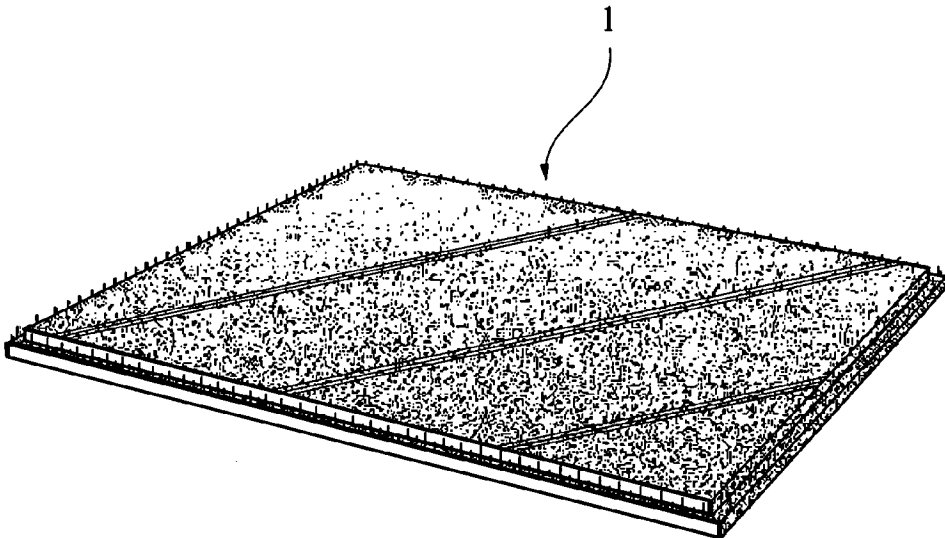


FIG.10

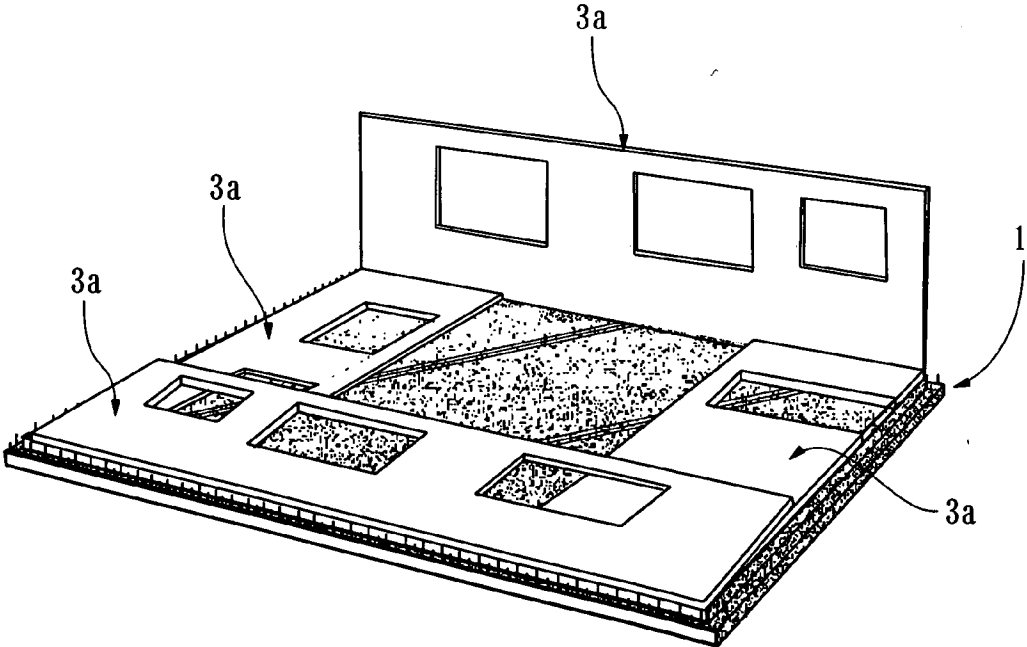


FIG.11

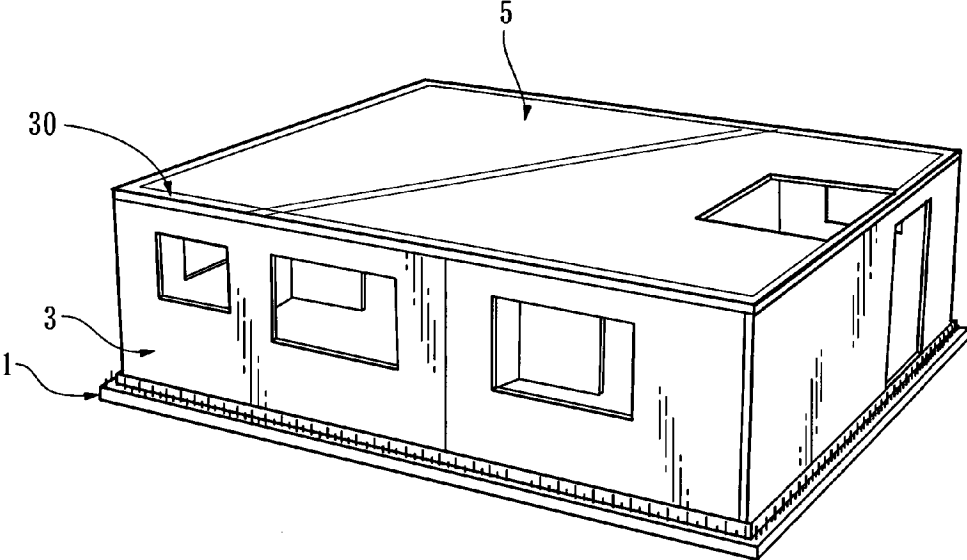


FIG.12

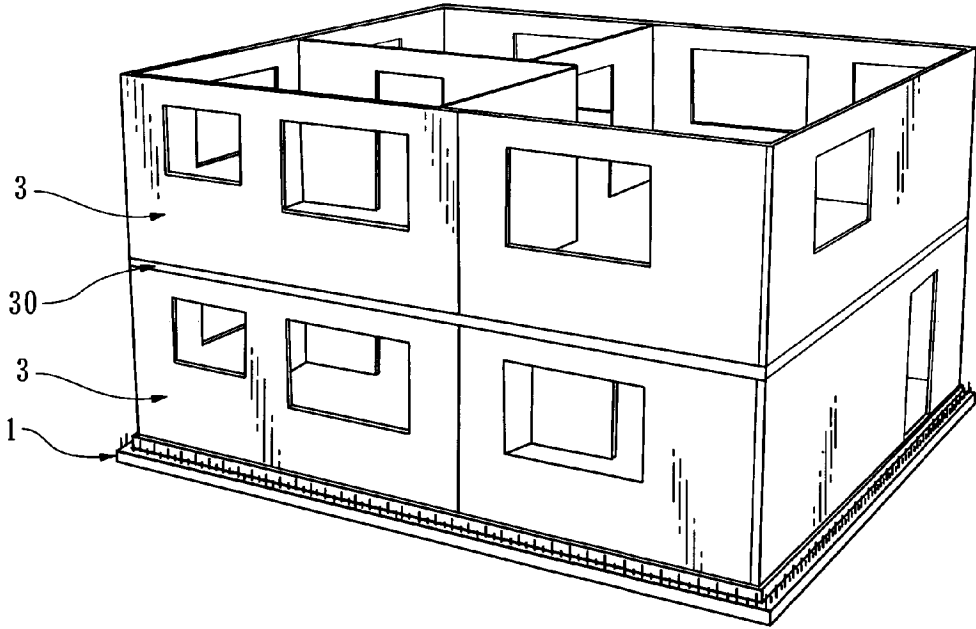


FIG.13

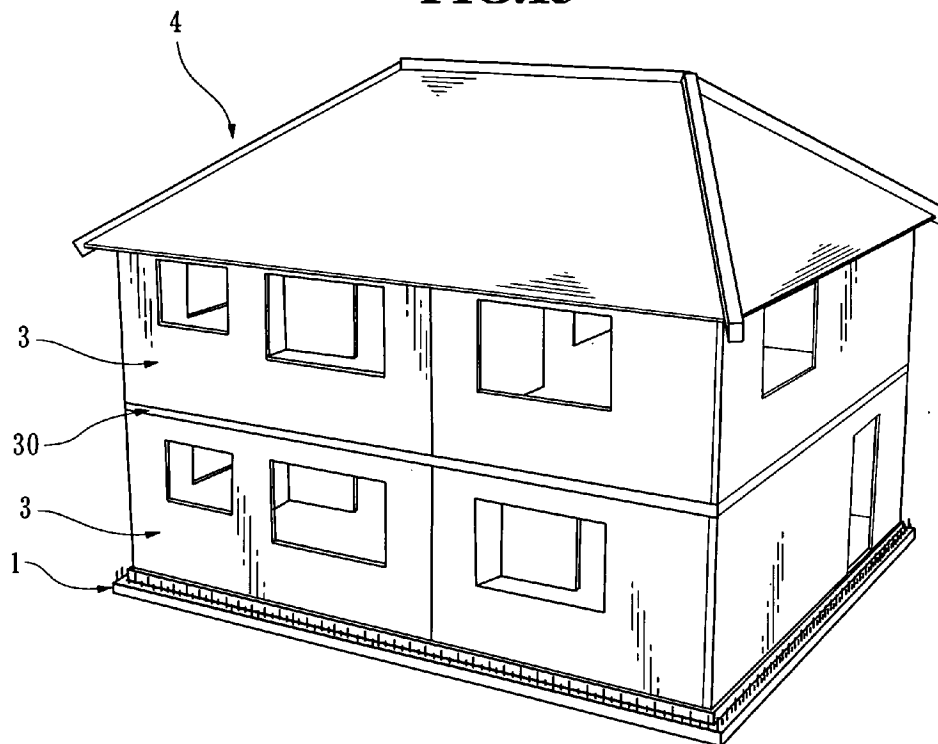


FIG.14

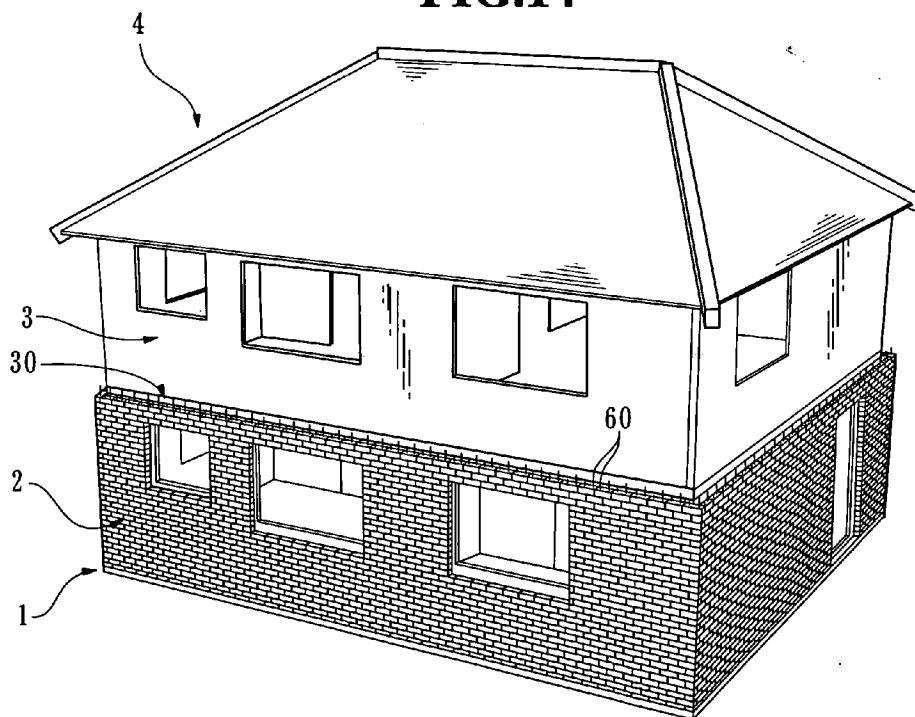


FIG.15


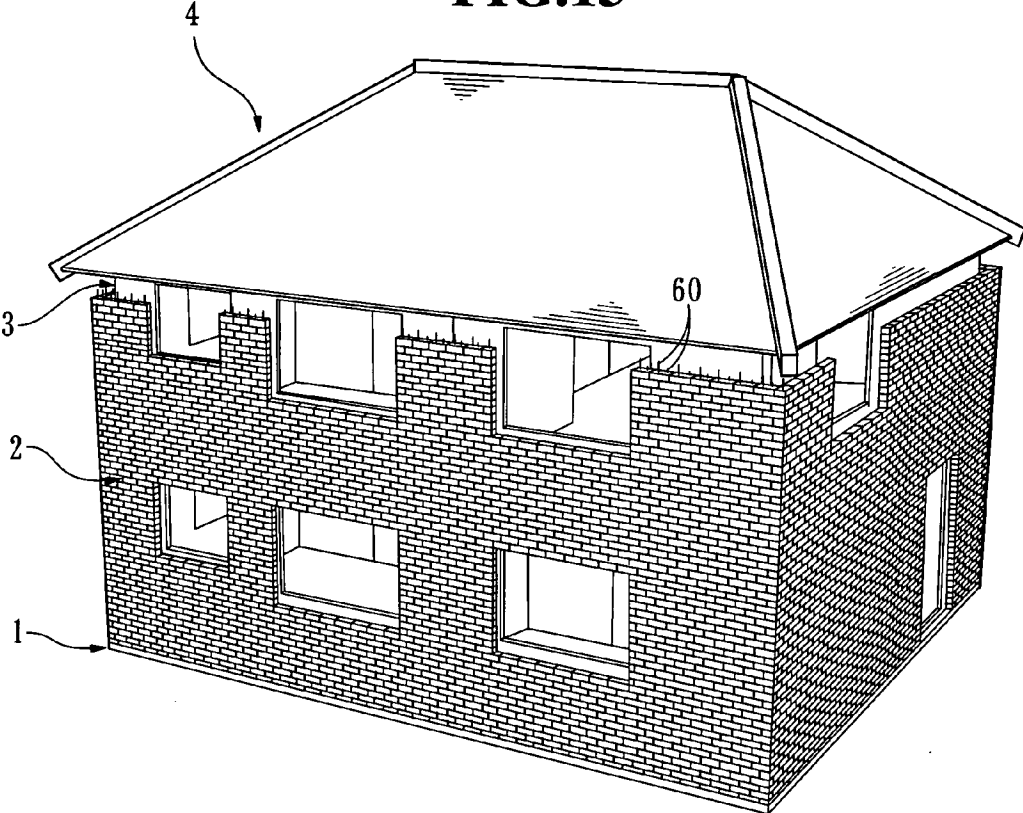


FIG.16

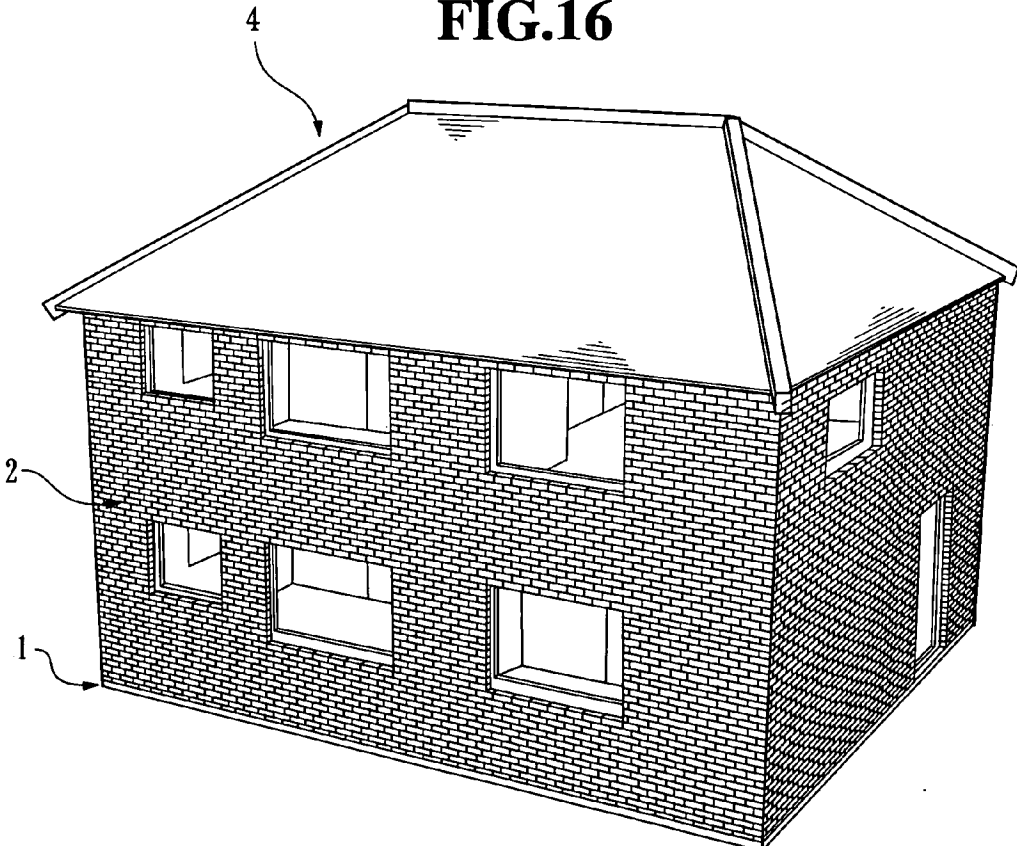

WALL CONSTRUCTION OF ARCHITECTURAL STRUCTURE

TECHNICAL FIELD

[0001] The present invention relates to a wall structure of an architecture, and more specifically, to such a wall structure in the architecture which is provided with an outer wall of a bricklaying structure constructed in accordance with a Distributed and Unbonded Prestress (DUP) construction method.

TECHNICAL BACKGROUND

[0002] A variety of building construction methods are known in the art, such as wooden, reinforced concrete, steel and block masonry construction methods. One type of these construction methods is known as a bricklaying method, in which a wall structure is constructed by bricklaying. Bricks produced by baking clay at a high temperature are evaluated highly due to their architectural design effects or aesthetic effects resulting from their exterior wall, stately appearances, feelings, colors and so forth. The bricks also exhibit their excellent physical performances with respect to durability, sound insulation effect, fire resistance efficiency, heat accumulation effect and so forth. Therefore, the bricks have been popularly and traditionally used worldwide and widely employed for a long time as materials for architectural wall structures.

[0003] The present inventor has proposed Distributed and Unbonded Prestress (DUP) construction method as a dry type of bricklaying construction method. This is a bricklaying construction method in which bricks are stacked in a multi-layered condition while prestress is introduced into the bricks by tightening forces of metal bolts, and studies for practical applications thereof are still continued (Japanese patent applications Nos. 4-51893, 5-91674, 6-20659, 7-172603 and 8-43014).

[0004] In general, reduction in construction costs of a house or the like is a common matter of concern for an owner, designer or constructor. Use of imported materials produced in the other countries can be considered to be effective in reduction of the construction costs. From this standpoint, housing materials produced in conformity to standards or specifications in foreign countries are imported for domestic use. These kinds of imported materials might exhibit sufficient load-carrying capacities with respect to a vertical load such as a dead load and a live load. However, in many cases, they are not in conformity to the domestic standards with regard to earthquake-resistance and wind-resistance. Therefore, it is necessary to take countermeasures, such as reinforcement of the members, or employment of members with larger cross-sections, in a case where the imported materials are to be used.

[0005] For example, as regards a conventional house, a type of construction such as a framework construction or wood frame construction is determined, and thereafter, it is designed from a design concept in which the determined construction type of structure shares both a permanent load (a dead load, a live load) and a temporary load (a seismic load, a wind load). On the other hand, with regard to structural materials such as two-by-four wooden panels designed and manufactured in conformity to the standard of an aseismic country, these materials are often inadequate for

domestic standards (especially, standards of seismic countries) with respect to their strength against the seismic load, even if they can exhibit a strength against the permanent load (dead load, live load) equivalent to that of domestic structural materials. As is often the case, the imported materials cannot be employed, merely because of their insufficient strength against the temporary horizontal load.

[0006] Also in a house with brick walls, it can be considered that inner walls are constructed with the use of building materials having a relatively low strength, such as imported materials or materials manufactured at low prices, and that the inner walls are combined with outside brick walls, whereby construction costs of a house or the like are reduced. However, in a case where a conventional brick wall is constructed using a wet type method of construction, then it is difficult to share the temporary horizontal load such as a seismic force acting on the architecture, even if the wall can support the dead load. Therefore, it is necessary to support the temporary horizontal load, utilizing the inner wall. However, it is difficult to obtain sufficient strength against the temporary horizontal load such as the seismic load when utilizing the inner wall which is made of construction materials manufactured in conformity to the standards and specifications of foreign countries or materials manufactured at low prices, as set forth above. Therefore, reinforcement of the inner wall, change of design thereof, or the like, is required. As the result, the construction costs are rather increased. On the other hand, it has been found from recent researches that the brick wall made by the DUP construction method can exhibit high strength against the temporary horizontal load. However, the brick wall using the DUP construction method is constructed so as to support the permanent vertical load including the load of the roof. If the brick wall further shares the temporary horizontal load, the load to be shared by the brick wall is considerably increased. Further, if the brick wall shares both of the permanent and temporary loads, the loads to be imposed on the inner wall is significantly reduced, and this results in a surplus strength of the inner wall. This is not desired from an aspect of optimization of loading balance with respect to respective structural constituents of the architecture.

[0007] Further, shortening of the construction period is a common theme with respect to all kinds of architectural structures, as well as the reduction in the costs of construction. As regards the brick wall made by the DUP construction method, it is possible to significantly reduce the term of time required for the bricklaying works, in comparison to the term required for conventional bricklaying works under the wet type construction method. However, in regard to the brick walls of bricklaying structure, it is necessary to perform interior finish works after constructing the brick walls, and therefore, the bricklaying process and the interior finishing process constitute a critical path of the whole construction schedule. In order to further shorten the construction schedule, an approach is necessary to enable simultaneity of the bricklaying process and the interior finishing process.

[0008] The brick wall made by the dry type of construction method (the DUP construction method) also allows its construction works to be carried out in a short period of time under normal weather conditions, and merits in shortening of the construction period can be achieved. However, the bricklaying processes for outer walls are apt to be affected

by weather, particularly rainfall. For instance, if bad weather conditions continue for a long period of time owing to abnormal weather, a delay of the construction schedule of the bricklaying works is apprehended, regardless of the wet type of construction method or the aforementioned dry type of construction method (the DUP construction method). Therefore, it is desirable to provide a measure in which bricklaying works are enabled under circumstances unaffected by weather condition, even when bad weathers continue.

[0009] It is an object of the present invention to provide a wall structure of an architecture which properly shares the permanent vertical load and the temporary horizontal load, appropriately using both the low-priced construction materials having a relatively low strength, such as imported materials, and the brick wall utilizing the dry type of construction method (the DUP construction method).

[0010] It is another object of the present invention to provide a wall structure of an architecture which comprises a wall mainly sharing the permanent vertical load and a wall mainly sharing the temporary horizontal load, so that these walls can exhibit the structural strength against design loads in cooperation with each other.

[0011] It is yet another object of the present invention to improve a wall structure or a wall construction method in order to enable simultaneity in proceeding with the bricklaying work and the interior finish work, and allow the brick wall to be constructed under a circumstance unaffected by weather, using the dry type of construction method (the DUP construction method).

DISCLOSURE OF THE INVENTION

[0012] The present invention provides a wall structure of an architecture having an outer wall of a bricklaying structure, in which bricks and metal plates are stacked and fasteners extending through bolt holes of the bricks are tightened so that the vertically adjacent bricks are integrally connected with each other under prestress of the fasteners, comprising:

[0013] an inner wall constructed inside of said outer wall, and a shear reinforcement member connecting the outer wall and the inner wall,

[0014] wherein the inner wall is constructed as a wall for supporting a vertical load of a roof, an inner end portion of the shear reinforcement member is fixed to the inner wall, and an outer end portion of the shear reinforcement member is fixed to the outer wall by said fastener, whereby a seismic force acting on the roof and the inner wall is transmitted to the outer wall by means of the shear reinforcement member.

[0015] According to such an arrangement of the present invention, the wall structure of the architecture is constituted from a constituent (the inner wall) sharing the permanent vertical load such as the dead load and the live load, and a constituent (the outer wall) sharing the dead load and the temporary horizontal load (the seismic load, the wind load and so forth). These constituents (the inner and outer walls) exhibit a structural strength in cooperation with each other. Such a structural concept significantly differs from that of the conventional brick wall intended to mainly take aesthetic effects (the brick wall is constructed by the wet type of construction method, outside of the inner wall which shares

both the permanent vertical load and the temporary horizontal load, and the brick wall shares only its dead load.) The concept of the present invention can be obtained from findings such that the brick wall under the dry type of construction method (the DUP construction method) exhibits a high horizontal strength beyond expectation at the beginning, and such a concept cannot be obtained from the brick walls made by the wet type of construction method.

[0016] Further, according to the arrangement of the present invention, the inner walls can be constructed beforehand, and the roof can be constructed on the inner wall, and thereafter, bricklaying works for the outer walls can be performed. The bricklaying process of the outer walls is carried out under an eave of the roof, and therefore, any apprehension that the bricklaying process is delayed owing to influence of weather can be removed. In addition, since the inner walls have been already constructed before the bricklaying process of the outer walls, the bricklaying works and the interior finish works can be performed at the same time.

[0017] Furthermore, according to the aforementioned arrangement, the temporary horizontal load acting on the roof and the inner wall is transmitted to the outer wall by means of the shear reinforcement member, and the inner wall is blocked from the wind pressure by the outer wall so that the wind pressure does not act on the inner wall. Therefore, the inner wall may have a strength that is enough to endure a permanent vertical load such as the load of a roof, and apprehensions about problems of the resistance against earthquakes and wind can be removed with respect to the imported housing materials or the low-priced materials. Thus, it is possible to construct the inner wall with use of the imported housing materials or the low-priced materials, thereby reducing the construction costs.

[0018] Preferably, an end portion of the shear reinforcement member is secured onto the brick or secured between the vertically adjacent bricks, and it is fixed thereto by the tightening force of the fastener. The other end portion of the shear reinforcement member is tightly fixed to the inner wall. The shear reinforcement member may be composed of a bracket (21) on a side of the outer wall and a bracket (22) on a side of the inner wall wherein the former bracket (21) is secured on the brick or secured between the vertically adjacent bricks and the latter bracket (22) is tightly fixed to a component of the inner wall. In such an arrangement, the brackets on the outer and inner wall sides are connected with each other in a stress transferable condition.

[0019] The present invention also provides a wall structure of an architecture having a double wall structure of an outer wall and an inner wall,

[0020] wherein said outer wall has a strength for sharing a dead load of the outer wall and a temporary horizontal load acting on the outer wall and the inner wall, and said inner wall has a strength for sharing a dead load of the inner wall and a permanent vertical load acting on the inner wall; and

[0021] wherein said outer and inner walls are connected with each other by a shear reinforcement member which transmits a shearing force of the inner wall to the outer wall, whereby the temporary horizontal load acting on the inner wall is transmitted to the outer wall by the shear reinforcement member.

[0022] According to such an arrangement of the present invention, the inner wall mainly sharing the permanent load and the outer wall mainly sharing the temporary load exhibit a structural strength against the design load (the temporary and permanent loads) in cooperation with each other. Therefore, two-by-four wooden panels at low prices, which do not have sufficient aseismatic abilities, can be used for constructing the inner wall.

[0023] Preferably, the outer wall is a wall of bricklaying structure, in which the bricks and metal plates are stacked and the fasteners extending through the bolt holes of the bricks are tightened so that the vertically adjacent bricks are integrally connected with each other under the prestress of the fasteners.

[0024] Preferably, a temporary allowable shear force of the outer wall is in proportion to the prestress applied to the fastener. The temporary allowable shear force Q_{AS} of the outer wall can be determined by the following formula:

$$Q_{AS}=t \cdot j \cdot \mu \cdot N_p / A$$

wherein

[0025] t : effective thickness of the wall

[0026] j : distance between centers of tension and compression in the wall

[0027] N_p : total amount of prestress (force) applied to the layer which causes slippage

[0028] μ : the coefficient of friction between the brick and a contact surface of a metal plate (a horizontal reinforcement plate)

[0029] A : effective cross-sectional area of the wall.

[0030] Such a setting allows the brick wall constituting the outer wall to be designed as a load bearing wall having an effective aseismatic ability. Further, arbitrary setting of the aseismatic ability or aseismatic effect of the brick wall can be carried out by appropriate setting of the prestress.

[0031] From another aspect, the present invention provides a method of constructing a wall of an architecture, comprising steps of:

[0032] constructing an inner wall for supporting a load of a roof by a dry type of construction method, constructing a roof structure on the inner wall; and

[0033] constructing an outer wall under an eave of the roof structure by stacking bricks and metal plates outside of the inner wall;

[0034] wherein the vertically adjacent bricks are integrally connected under prestress of a fastener with each other by tightening the fastener extending through a bolt hole of the brick, and

[0035] wherein a shear reinforcement member, which transmits a temporary horizontal load acting on the inner wall to the outer wall, is provided to connect the outer and inner walls with each other when the bricks are laid up to a predetermined layer.

[0036] According to such a construction method, the bricklaying process can be performed under the eave of the roof without being affected by rainfall. Further, the interior

finish work and the bricklaying work can be carried out at the same time, whereby the construction period can be shortened.

[0037] The inner wall, which has been constructed beforehand, functions as a reference or a ruler for positioning the bricks upon bricklaying, and therefore, the accuracy of bricklaying work is improved. The shear reinforcement member is fixed onto the upper face of the brick or fixed between the bricks by tightening force of the fastener, when the bricks are laid up to a predetermined layer. Therefore, the shear reinforcement member is fixed to the brick by the tightening force of the fastener for the bricks, without use of any particular fastener, fixing element, or the like, and the shear reinforcement member can be tightly fixed to the brick wall by the tightening force of the fastener.

[0038] As an application of the present invention, a construction method of a wall is provided, which improves resistance of an existing architecture against earthquakes and wind. That is, the present invention provides a method of constructing a wall of an architecture, comprising steps of:

[0039] stacking bricks and metal plates, and tightening fasteners extending through bolt holes of the bricks so as to integrally connect the vertically adjacent bricks with each other under prestress of the fastener, thereby constructing an outer wall of bricklaying structure outside of a wall of an existing architecture; and

[0040] connecting the existing architecture and the outer wall with each other by a shear reinforcement member when the bricks are stacked up to a predetermined layer, whereby the outer wall supports a temporary horizontal load acting on the existing architecture.

[0041] According to such a construction method, the temporary horizontal load acting on the existing architecture is transmitted to the outer wall by the shear reinforcement member. Since the seismic force acting on the existing architecture with the outer wall thus constructed is transmitted to the brick wall by means of the shear reinforcement member, the existing architecture is improved in its resistance against earthquakes. Since the brick wall blocks the wind pressure which may otherwise act on the existing exterior wall, the existing architecture is also improved in its wind resistance. Therefore, the existing architecture, which lacks in its resistance against earthquakes and wind, is reconstructed or reinforced to have a sufficient resistance against earthquakes and wind by constructing the brick wall.

BRIEF DESCRIPTION OF THE DRAWINGS

[0042] FIG. 1 is a schematic cross sectional view showing a house provided with a wall structure according to the present invention;

[0043] FIGS. 2 and 3 are cross-sectional views illustrating a bricklaying process of an outer wall;

[0044] FIG. 4(A) is a perspective view of a brick, and FIGS. 4(B) and 4(C) are a perspective view and a front elevational view showing a brick-laid condition;

[0045] FIG. 5 is a cross-sectional view showing a structure of a shear reinforcement metal part and a way of setting of the metal part, which is positioned on the uppermost portions of the outer and inner walls;

[0046] FIG. 6 is a perspective view showing an arrangement of shear reinforcement means provided on a second floor section;

[0047] FIG. 7 is a diagram showing results of a loading test (loading hysteresis curve) with respect to a brick wall made by the DUP construction method;

[0048] FIG. 8 is a diagram showing results of a test of an out-of-plane rigidity (results of an out-of-plane test) with respect to the brick wall made by the DUP construction method;

[0049] FIG. 9 is a perspective view showing a process of construction of a two-story house, in which a process of construction of foundation and first floor base structure is illustrated;

[0050] FIG. 10 is a perspective view showing a built-up process of the inner walls on the first floor;

[0051] FIG. 11 is a perspective view showing a process of construction of a second floor structure;

[0052] FIG. 12 is a perspective view showing a process of construction of the inner walls on the second floor;

[0053] FIG. 13 is a perspective view showing a process of roofing work;

[0054] FIG. 14 is a perspective view showing a bricklaying process for the outer walls of the first floor;

[0055] FIG. 15 is a perspective view showing a bricklaying process for the outer walls of the second floor; and

[0056] FIG. 16 is a perspective view showing a condition in which the bricklaying work is completed.

BEST MODE FOR CARRYING OUT THE INVENTION

[0057] With reference to the attached drawings, a preferred embodiment of the present invention is described hereinafter.

[0058] FIG. 1 is a schematic cross-sectional view showing a house provided with brick wall structures in accordance with the present invention.

[0059] In general, the architecture is constructed from a foundation and floor slab 1, outer walls 2, inner walls 3, a roof structure 4, a second floor structure 5 and ceilings 6. The outer walls 2 are brick walls laid on the foundation and floor slab 1 in accordance with the DUP construction method. The inner walls 3 are constructed from wooden panels which are utilized in a two-by-four method for a wooden construction, and it is built up on the foundation and floor slab 1. The roof structure 4 is supported by upper ends of the inner walls 3, and roofing materials are provided on an upper surface of the roof structure 4. The load of the roof structure 4 acts on the inner walls 3 as a vertical load, which are supported by the load-carrying capacity of the inner walls 3.

[0060] Outside end portions of shear reinforcement metal parts 10 are secured to uppermost end portions of the outer walls 2, and the metal parts 10 horizontally extend toward the inner walls 3. An inner end portion of each of the metal parts 10 is bent downward at a right angle and connected to an upper end portion of the inner wall 3 by a bolt 31. A

horizontal load (seismic force and so forth) acting on the roof structure 4 and the inner walls 3 is transmitted to the outer walls 2 by means of the metal parts 10 and it is supported by resistance of the outer walls 2 against earthquakes.

[0061] The second floor structure 5 and the upstairs inner wall 3 are supported by horizontal members 30, which are connected in a stress transferable condition with the outer walls 2 on an intermediate level thereof by shear reinforcement means 20. The shear reinforcement means 20 is composed of a bracket 21 on a side of the outer wall and a bracket 22 on a side of the inner wall, the bracket 21 being fixed to the outer wall 2 and the bracket 22 being fixed to the horizontal member 30. The brackets 21, 22 are integrally connected with each other by bolt-nut assemblies (not shown). The horizontal load (seismic force and so forth) acting on the inner wall 3 and the second floor structure 5 is transmitted to the outer wall 2 and supported by the resistance of the outer wall 2 against earthquakes.

[0062] FIGS. 2 and 3 are cross-sectional views illustrating a bricklaying process of the outer wall. FIG. 4(A) is a perspective view of the brick, and FIGS. 4(B) and 4(C) are a perspective view and a front elevational view showing the brick-laid condition;

[0063] The bricks A:B for the outer wall 2 are vertically stacked as shown in FIG. 2, and a metal plate 51 (horizontal reinforcement plate) is interposed between the bricks A:B. The metal plate 51 has a width substantially equal to a width of an upper face of the brick and a length approximately equal to a length of the brick. Each of the metal plates 51 is positioned so as to extend over the adjacent two bricks. As illustrated in FIG. 4, the bricks are laid in a staggering formation, and the vertically adjacent bricks are relatively shifted along a centerline of the wall by a half size of the brick.

[0064] A bolt hole 53 of the metal plate 50 interposed between the vertically adjacent bricks A:B are in alignment with the bolt hole 7 and a through-hole 8 with a large diameter. A full screw-cut bolt 60 is inserted into the bolt hole 7, the through-hole 8 and the bolt hole 53. The bolt 60 has a height (length) equivalent to the height of two-layered bricks A:B, A long nut 70, into which the bolt 60A can be screwed, is positioned in a hollow section 80 of the through-hole 8.

[0065] The plate 51 is positioned on the upper face of the bricks A:B which have been already brick-laid. A circular washer 63 and a spring washer 62 are placed on the plate 51 in alignment with the bolt hole 53. An upper end portion of the bolt 60A extends through the bolt hole 53 and the washers 63, 62 and protrudes upwardly. The long nut 70 is screwed on the upper end portion of the bolt 60A to an extent of a lower half of an internal thread 71.

[0066] A specific fixing tool 100 as illustrated by phantom lines in FIG. 2 is used for tightening the nut 70 onto the bolt 60A. The fixing tool 100 is provided with a portable driving part 101, a socket part 102 selectively engageable with the bolt 60 and the nut 70, and a joint part 103 which can integrally connect the proximal portion of the socket 102 with a rotary shaft 104 of the driving part 101. The socket part 102 receives the nut 70 so as to transmit the torque of the part 101 to the nut 70, thereby rotating the nut 70 in its

tightening direction. The nut **70** rotates relatively to the bolt **60A** to be securely tightened onto the upper end portion of the bolt **60A**.

[0067] In a succeeding bricklaying step, the brick C for an upper layer is further laid on the lower layer brick B. The nut **70** is contained in the hollow section **80**, and the metal plate **51** is laid on the brick C, and then, the brick D of a further upper layer is laid on the plate **51**. A bolt **60B** is inserted into the bolt hole **7** of the uppermost brick D, and a lower end portion of the bolt **60B** is screwed into the nut **70**. The aforementioned fixing tool **100** is also used for tightening the bolt **60B** into the nut **70**. The socket part **102** of the tool **100** receives an upper end portion of the bolt **60B** and transmits the torque of the driving part **101** to the bolt **60B**, so that the bolt **60B** is rotated in its tightening direction. This results in the bolt **60B** being securely tightened into the nut **70**.

[0068] The brick-laid condition of the bricks A:B:C:D thus constructed is shown in FIGS. 3 and 4. The steps of assembling the bricks, the washers **63**, **62**, the bolts **60** and the nuts **70** are repeatedly carried out for the upper layers above the bricks C:D, whereby a continuous vertical wall is constructed, which comprises the bricks integrally laid by means of the fastening elements **60**; **62**; **63**; **70**.

[0069] Tensile stress corresponding to the tightening torque acts as prestress on the bolt **60** screwed into its upper and lower nuts **70**, whereas compressive stress acts as prestress on the brick **10** between the upper and lower plates **51**. The torque applied to the bolt **60** and the nut **70** in the upper layer transfers to the bolt **60** and the nut **70** immediately thereunder, and acts to further tighten the underside bolt and nut. Therefore, a series of connected bolts **60** and nuts **70** functions in such a manner that the tightening torque of the bolts **60** and nuts **70** in the upper layer is transmitted to the bolts **60** and nuts **70** in the lower layer. Thus, the bolts **60** and nuts **70** in the lower layer are further tightened by a stronger tightening torque as the bricks **1** are laid in the upper and upper layers. Thus, a considerably enhanced prestress acts on the bolts **60** and the bricks **1** in the lower layers, so that the rigidity and toughness of the outer walls **2** are considerably improved against horizontal and vertical exciting forces.

[0070] The brick D in FIG. 5 is illustrated as an uppermost brick of the outer wall **2**. The shear reinforcement metal part **10** is an integral metal plate having a horizontal portion **11** and a vertical portion **12**. The horizontal portion **11** is provided with a bolt hole **13** into which the bolt **60** (**60B**) can be inserted. The circular washer **63** and the spring washer **62** are placed on the horizontal portion **11** in alignment with the bolt hole **13**. The upper end portion of the bolt **60B** extends through the bolt hole **13** and the washers **63**, **62** and protrudes upwardly. The long nut **70** is screwed onto the upper end portion of the bolt **60B**. For tightening the nut **70**, the aforementioned fixing tool **100** is used.

[0071] The vertical portion **12** is provided with a bolt hole **14**. As shown in FIG. 1, a full screw-cut bolt **31** protruding toward the outer wall is fixed to the upper end portion of the inner wall **3** on the second floor. The vertical wall **12** is positioned on an upper side face of the inner wall **3** so that the protruding portion of the full screw-cut bolt extends through the bolt hole **14** of the vertical portion **12**. As shown in FIG. 5, a distal end portion of the full screw-cut bolt

31 (shown by phantom lines), which extends through the hole **14**, is tightened with a nut (shown by phantom lines). The shearing reinforcement metal part **10** is integrally connected to the upper end portion of the inner wall **3** on the second floor by tightening with the nut. Thus, the upper end portions of the outer wall **2** and the inner wall **3** on the second floor are connected in a stress transferable condition with each other by the shear reinforcement metal part **10**.

[0072] FIG. 6 is a perspective view showing a structure of shear reinforcement means **20** for an intermediate floor, which is provided on a second floor section.

[0073] The shear reinforcement means **20** is located in a level equivalent to a level of the horizontal member **30**, so that the intermediate portion of the outer wall **2** and the horizontal member **30** are connected in a stress transferable condition with each other. The metal bracket **21** is positioned on the upper face of the brick when the bricks are laid up to a predetermined level. The bracket **21** is constituted from a horizontal portion **24** and an inclined portion **25**. The horizontal portion **24** positioned on the upper face of the bricks has an overall length such that the portion **24** extends over a plurality of bricks. The inclined portion **25** is inclined upward at a predetermined angle relative to the horizontal portion **24** and extends toward the inner wall **3**. The horizontal portion **24** is provided with bolt holes **26** at predetermined intervals, through which the bolts **60** can be inserted. The upper end portions of the bolts **60** extend through the bolt holes **26** and protrude upward. The bolts **60** in predetermined positions are tightened with the long nuts **70** by means of the fixing tool **100**, as previously described. The horizontal portions **22** are horizontally fixed onto the bricks by the tightening power of the nuts **70**.

[0074] A vertical portion **27** of the metal bracket **22** is fixed to a side face of the horizontal member **30**. Bolts **33** protruding from the side face of the horizontal member **30** extend through bolt holes (not shown) formed on the vertical portion **27**. Distal end portions of the bolts **33** are tightened with nuts **34**. The vertical portions **27** are integrally secured to the horizontal member **30** by the tightening power of the nuts **34** and fixed thereto in a stress transferable condition. The inclined portions **28** of the metal brackets **22** extend from lower ends of the vertical portions **27** toward the outer wall **2**. An angle of inclination of the inclined portion **28** coincides with the angle of inclination of the inclined portion **25**. The inclined portions **28**, **25** overlap with each other in a space between the inner and outer walls **3**, **2**. The overlapping zone of the inclined portions **28**, **25** is provided with bolt holes (not shown) at predetermined intervals, and those portions **28**, **25** are tightly connected with each other by bolt-nut assemblies **29**. The bolt-nut assembly **29** comprises a bolt **29a** extending through the bolt holes and a nut **29b** tightly screwed onto the bolt **29a**. The bricks are further laid on the horizontal portions **24**.

[0075] Thus, the inner wall **3** is connected with the outer wall **4** by the shear reinforcement metal parts **10** and the shear reinforcement means **20**, so that a temporary horizontal load acting on the inner wall and the roof structure **4**, such as a seismic load or a wind load, is transmitted to the outer wall by the shear reinforcement metal parts **10** and the shear reinforcement means **20**. Since the outer wall **4**, which is a brick wall made by the DUP (Distributed and Unbonded Prestress) construction method, has an effect sufficient

enough in strength to resist against the temporary horizontal load, the inner wall 3 may merely share a horizontal load.

[0076] FIG. 7 is a diagram showing results of a loading test (loading hysteresis curve) with respect to the DUP brick wall which constitutes the outer wall 2. The loading hysteresis curves as shown by solid lines in FIG. 7 represent relations between the horizontal load acting on the brick wall and the angle of shear deformation. In the diagram of FIG. 7, loading hysteresis curves of a pure Rahmen frame of steel structure is depicted as a comparative example by dotted lines. In the diagram of FIG. 7, an axis of the ordinate indicates Q/Q_{AS} which is a ratio of the inplane horizontal load Q to the temporary allowable shear force Q_{AS} , and an axis of the abscissa indicates the angle of shear deformation. The brick wall used in the experiment was constructed with use of steel bolts M12, and the prestress of 7.0 kN per bolt was equally applied to each of the bolts.

[0077] As shown in FIG. 7, the loading hysteresis curves of the brick wall are, in general, analogous to the loading hysteresis curves of the steel structure, the curves representing steady fusiform loops. It is considered that this results from occurrence of slippage between the brick and the metal plate, which compensates the temporary horizontal load such as the seismic force inside of the dry-materials structure composed of the bricks and the plates. Such slippage allows the wall to flexibly respond to the temporary horizontal load, whereby total destruction or collapse of the wall can be prevented from occurring. That is, the brick wall highly effects an energy-absorption ability and possesses a strength against the considerable seismic force so as to prevent the wall from being totally destroyed or collapsed. In order to ensure a sufficient safety factor with respect to the ultimate strength, the temporary allowable shear force of the brick wall is set to be in such a condition that occurrence of a plastic deformation due to the slippage is not permissible ($Q/Q_{AS} < 1$).

[0078] The formula for analyzing the shear unit stress and the angle of deformation, which is used for design of the brick wall, is as follows:

$$\Theta = \{ (H \cdot h_m^2 / 2 E_w I_w - h_m^3 / 6 E_w I_w) \cdot A / H + 1 / G \} \tau$$

[0079] Θ : angle of shear deformation of the wall

[0080] τ : shear unit stress

[0081] A : effective cross-sectional area of the wall

[0082] H : height of the wall

[0083] h_m : level of a measured point

[0084] G : shear elastic modulus of the dry-materials structure (the structure composed of the bricks, plates, bolts and nuts)

wherein

$$E_w I_w = E_b I_b + E I$$

[0085] E_b : Young's modulus of the bolt

[0086] E : Young's modulus of the dry-materials structure

[0087] I_b : moment of inertia for all bolts

[0088] I : moment of inertia for total cross-sectional area of the dry-materials structure.

[0089] The proportion of the temporary horizontal load shared by each of the walls of the architecture depends on the angle of shear deformation caused in response to the shearing unit stress, and so forth. The design temporary shearing force (inplane sharing) of each of the walls, which corresponds to the design seismic force for the design of the architecture, is determined, based on the ratio of its share of the temporary horizontal load.

[0090] The formula for design with respect to the inplane shearing of the DUP brick wall is as follows:

$${}_D Q_S / Q_{AS} \leq 1 \tag{1}$$

[0091] ${}_D Q_S$: design temporary shearing force of the wall

[0092] Q_{AS} : temporary allowable shear force of the wall (strength against shearing in the critical state against damage).

[0093] " Q_{AS} " (temporary allowable shear force) is obtained by the following formula (2) (in a case of wall without opening):

$$Q_{AS} = t \cdot j \cdot f_s \tag{2}$$

[0094] t : effective thickness of the wall

[0095] j : distance between centers of tension and compression in the wall

[0096] f_s : temporary allowable shearing unit stress of the wall (strength against sharing in the critical state against damage)

[0097] wherein $j = 7d/8$ (" d " is the distance between an end of the wall on its compression side and the center of vertical reinforcement element (the center of the bolt) in an end of the wall on its tension side).

[0098] " f_s " (temporary allowable shearing unit stress) depends on the prestress applied to the bolt and obtained by the following formula (3):

$$f_s = \mu N_p / A \tag{3}$$

[0099] N_p : total amount of prestress (force) applied to the layer which causes slippage

[0100] μ : the coefficient of friction between the brick and a contact surface of the horizontal reinforcement plate (metal plate)

[0101] A : effective cross-sectional area of the wall

[0102] FIG. 8 is a diagram showing results of a test of an out-of-plane rigidity (results of an out-of-plane bending test) with respect to a brick wall constituting the outer wall 2. In FIG. 8, bending unit stress is shown, which acts on the brick wall as a result of the horizontal load perpendicularly acting on the brick wall at a right angle.

[0103] As the load, e.g., the wind load, perpendicularly acting on the brick wall in an out-of-plane direction is increased, the wall starts to cause a bending deformation, so that a narrow gap is formed between the vertically adjacent bricks on the wall face of the tension side (tensile edge open point). In a case where the bending stress exceeding this point acts on the inside of the wall, inclination of the curve representing the relation between the angle of deformation and the bending unit stress is reduced after it exceeds a rigidity reduction point. The curve shows a tendency similar to that of the relation between the angle of deformation and the bending unit stress in a plastic deformation range.

However, release of the load in the out-of-plane direction causes the wall to return to its initial state, and its residual strain and residual deformation are slight. This results from the prestress applied to the bolt. The results of such experiments repeatedly conducted show that the brick wall undergoes substantial elastic deformation to a marked extent of the deformation angle in response to the temporary horizontal load acting thereon in the out-of-plane direction, such as wind pressure. Thus, it is found that, if an action is added which appropriately transmits the load from this brick wall to another brick walls or the like located perpendicularly thereto, the outer wall can be designed so as not to cause the wall to be totally collapsed or destroyed by seismic force, wind pressure or the like in the out-of-plane direction.

[0104] FIGS. 9 to 16 are perspective views schematically illustrating steps of construction of a two-story house.

[0105] In an architecture where the wall construction is in accord with the present invention, the inner wall 3 is constructed before the brick wall constituting the outer wall 2 is constructed, as shown in FIGS. 9 to 16. At the step of constructing the foundation and floor and the step of constructing the inner wall on the first floor as illustrated in FIGS. 9 and 10, the foundation and floor slab 1 are constructed, and thereafter, the wooden panels 3a constituting the inner walls 3 of the first floor are successively built up on the foundation and floor slab 1. Then, the second floor structure 5 is constructed and the inner wall 3 of the second floor is built up by wooden panels similar to those of the inner wall on the first floor, as shown in FIGS. 11 and 12. Further, the roof structure 4 and the roof are constructed on the inner wall 3 of the second floor, as shown in FIG. 13. The inner wall 3 has a load-carrying performance (a durability against a vertical load) sufficient enough to endure the vertical load, and therefore, the structures made by the inner wall 3, the roof structure 4 and the floor structure 5 of the second floor are transitionally stable.

[0106] As shown in FIG. 14, the bricks for the outer wall 2 are laid on the outer peripheral zone of the foundation and floor slab 1 in accordance with the DUP construction method as previously described. Since the roof structure 4 has been already constructed, the bricklaying work can be carried out without being affected by weather and it is unnecessary to protect the bricks against rainwater. The bricklaying work is performed under circumstances below eaves where the work is not affected by a rainfall, and therefore, it is possible to avoid a delay of schedule of the bricklaying work owing to the rainfall. Further, since the inner walls 3 have been already constructed, an interior finish work, such as an interior finishing board work, can be carried out simultaneously with the step of bricklaying work for the outer walls 2. Thus, the construction period can be shortened by performing the bricklaying step and the interior finish step at the same time.

[0107] As illustrated in FIG. 14, the shear reinforcement means 20 (FIG. 6) as previously described is provided when the bricklaying work of the outer wall 2 on the first floor is finished up to the second floor level. The outer wall 2 and the inner wall 3 are connected with each other by the shear reinforcement means 20. Thereafter, bricklaying work for the outer wall 2 of the second floor is carried out, as shown in FIG. 15. At a stage of bricklaying the bricks at the uppermost layer, the upper end portion of the outer wall 2 is

connected with the upper end portion of the inner wall 3 by the shear reinforcement metal parts 10 (FIG. 5). Thus, the outer walls 2 are constructed on the periphery of the architecture.

[0108] According to such an arrangement, the inner wall 3 supports the dead load of the inner wall 3, the load of the roof structure 4, the load of the second floor, the live load of the architecture, and so forth. The seismic force acting on the inner wall 3 is transmitted to the outer wall 2 through the shear reinforcement metal parts 10 and the shear reinforcement means 20, and supported by the outer wall 2. Further, the wind pressure does not act on the inner wall 3 since the outer wall 2 blocks the wind pressure, which may, otherwise, act on the inner wall 3. Therefore, since the inner wall 3 may share only the vertical load, the wooden panel with a relatively low strength, which lacks in aseismatic strength and wind resistance, can be used for construction of the inner wall 3.

[0109] Further, the arrangement according to the present invention is applicable to reconstruction or reinforcement of existing architectures which lack in aseismatic strength and wind resistance. Normally, the architecture exists in a state that its walls share both the permanent loads such as dead load and live load, and the temporary load such as seismic force and wind pressure. However, the existing architecture is deteriorated for long-term use, and its strength is decreased. Further, many architectures constructed in the past have often been provided with insufficient strength against earthquakes and wind, compared to recent architectures. Assuming that the walls 3 and the roof structure 4 as shown in FIG. 13 are walls and a roof of an existing architecture, an application of the present invention is described hereinafter, wherein the arrangement of the present invention is applied to reconstruction of the existing architecture.

[0110] In the existing architecture as shown in FIG. 13, the existing walls 3 support the permanent vertical load, such as the dead load of the walls 3 themselves, the load of the roof structure 4, the load of the second floor and the live load, and further, the walls 3 support the temporary horizontal load, such as the seismic force and the wind load. In order to reduce the temporary horizontal load acting on the architecture, the outer walls 2 of the bricklaying structure is newly constructed outside of the architecture in accordance with the DUP construction method. Specifically speaking, the foundation 1 for supporting the lowermost layer of the bricks is constructed along the lower end of the existing walls 3 as shown in FIG. 13, and the outer walls 2 of the bricklaying structure is built up as illustrated in FIGS. 14, 15 and 16. In the process of constructing the outer walls 2 as shown in FIGS. 14 and 15, the shear reinforcement metal parts 10 and the shear reinforcement means 20 are installed on the brick walls 2, and the existing walls 3 are connected with the outer walls 2. A seismic force acting on the existing walls is transferred as stress to the newly constructed outer walls 2 by the shear reinforcement metal parts 10 and the shear reinforcement means 20, and supported by the outer wall 2. The wind pressure does not act on the existing walls 3, since the outer walls 2 block the wind pressure which may, otherwise, act on the existing walls 3. Therefore, the existing architecture with the outer walls 2 thus constructed is released from the temporary horizontal load such as the seismic force and the wind pressure, and the architecture

may merely support the permanent load. Thus, the existing architecture is reinforced by constructing the outer walls 2 of the bricklaying structure.

[0111] Although the present invention has been described as to a preferred embodiment, the present invention is not limited thereto, but may be carried out in any of various modifications or variations without departing from the scope of the invention as defined in the accompanying claims.

[0112] For insurance, the shear reinforcement metal parts 10 and the shear reinforcement means 20 may be further provided in a level between the second floor level and the roof structure level, or in a level between the second floor level and the foundation level.

[0113] Further, the bolt holes of the shear reinforcement metal parts 10 and the brackets 21,22 can be designed to be loose holes or slots for workability of installation of the parts 10 and the brackets 21,22; relative movements of the parts 10 and the brackets 21,22 to the walls 2,3; movements of the brackets 21, 22 relative to each other; and so forth.

INDUSTRIAL APPLICABILITY

[0114] According to the present invention, a wall structure of an architecture can be provided, which appropriately uses both the brick wall utilizing the DUP construction method and the relatively low-strength or low-priced construction materials, such as materials of foreign specifications or low-priced specifications. The brick wall that uses the DUP construction method has a resistance against earthquakes and wind enough to share the temporary horizontal load acting on the architecture, differently from the conventional brick wall. Since the brick wall made by the DUP construction method shares the dead load and the temporary horizontal load, the inner wall may share the dead load and the permanent vertical load. Therefore, it is possible to construct the inner wall with use of imported housing materials or low-priced materials, thereby reducing the construction costs.

[0115] Further, according to the wall structure or the construction method of the present invention, the construction period can be shortened by simultaneously proceeding with the bricklaying work and the interior finish work. In addition, the bricklaying process can be carried out under circumstances situated beneath the eave of the roof structure without being affected by weather.

[0116] Furthermore, the wall structure according to the present invention is applicable to any type of wall structure. In such a case, the outer wall has strength for sharing its dead load and the temporary horizontal load acting on the outer and inner walls, whereas the inner wall has strength for sharing its dead load and the permanent vertical load acting on the inner wall. The load of the roof and upper floor and the permanent vertical load such as a live load are supported by the inner wall. The seismic load acting on the inner wall is transmitted to the outer wall by means of the shear reinforcement member and supported by the outer wall. Further, the wind load merely acts on the outer wall. Thus, the inner and outer walls exhibit the structural strength against the design load in cooperation with each other, and particularly, the seismic or wind load, i.e., the temporary horizontal load does not act on the inner wall, and therefore, the inner wall can be constructed with the use of relatively

low-strength or low-priced construction materials, such as the materials of foreign specifications or low-priced specifications.

1. A wall structure of an architecture having an outer wall of a bricklaying structure, in which bricks and metal plates are stacked and fasteners extending through bolt holes of the bricks and the metal plates are tightened so that the vertically adjacent bricks are integrally connected with each other under prestress of the fasteners, comprising

an inner wall constructed inside of said outer wall and a shear reinforcement member made of a metal connecting the outer wall and the inner wall with each other,

wherein the inner wall is constructed as a wall for supporting a vertical load of a roof, an inner end portion of the shear reinforcement member is fixed to the inner wall, and an outer end portion of the shear reinforcement member is positioned on said brick or between the bricks and fixed to the brick by a tightening force of said fastener, whereby a seismic force acting on the roof and the inner wall is transmitted to the outer wall by means of the shear reinforcement member.

2. The wall structure as defined in claim 1, wherein said shear reinforcement member has an overall length such that the member extends over the bricks.

3. The wall structure as defined in claim 1, wherein said shear reinforcement member is composed of a bracket (21) on an outer wall side secured onto said brick or secured between the bricks and a bracket (22) on an inner wall side tightly secured to a component of the inner wall, and wherein the brackets on the outer and inner wall sides are connected with each other in a stress transferable condition.

4. A wall structure of an architecture having a double wall structure of an outer wall and an inner wall,

said outer wall being a wall of a bricklaying structure in which bricks and metal plates are stacked and fasteners extending through bolt holes of the bricks and the metal plates are tightened so that the vertically adjacent bricks are integrally connected with each other under prestress of the fasteners,

wherein said outer wall has a strength for sharing a dead load of the outer wall and a temporary horizontal load acting on the outer wall and the inner wall, and said inner wall has a strength for sharing a dead load of the inner wall and a permanent vertical load acting on the inner wall; and

wherein said outer and inner walls are connected with each other by a shear reinforcement member made of a metal which transmits a shearing force of the inner wall to the outer wall, and an outer end portion of the shear reinforcement member is positioned on said brick or between the bricks and fixed to the brick by a tightening force of said fastener, whereby the temporary horizontal load acting on the inner wall is transmitted to the outer wall by the shear reinforcement member.

5. The wall structure as defined in claim 4, wherein said shear reinforcement member has an overall length such that the member extends over the bricks.

6. The wall structure as defined in claim 1, wherein a temporary allowable shear force of said outer wall is in proportion to the prestress applied to the fastener.

7. The wall structure as defined in claim 6, wherein the temporary allowable shear force Q_{AS} of said outer wall is determined by the following formula:

$$Q_{AS}=t \cdot j \cdot \mu \cdot N_P / A$$

wherein

t: effective thickness of the wall,

j: distance between centers of tension and compression in the wall,

N_P : total amount of prestress (force) applied to a layer which causes slippage,

μ : the coefficient of friction between the brick and a contact surface of a horizontal reinforcement plate,

A: effective cross-sectional area of the wall.

8. A method of constructing a wall of an architecture, comprising steps of:

constructing an inner wall for supporting a load of a roof by a dry type of construction method,

constructing a roof structure on the inner wall; and

constructing an outer wall of bricklaying structure under an eave of the roof structure by stacking bricks and metal plates outside of the inner wall;

wherein the vertically adjacent bricks are integrally connected with each other under prestress of a fastener by tightening the fastener extending through bolt holes of the brick and the metal plate, and

wherein a shear reinforcement member made of a metal, which transmits a temporary horizontal load acting on the inner wall to the outer wall, is positioned on the brick and fixed to the brick by a tightening force of said fastener when the bricks are laid up to a predetermined layer, whereby the outer and inner walls are connected with each other by said shear reinforcement member.

9. The method as defined in claim 8, wherein said shear reinforcement member has an overall length such that the member extends over the bricks.

10. The method as defined in claim 8, wherein said outer and inner walls are connected with each other by said shear reinforcement member when the bricks are laid up to a floor level of the architecture and a level of an uppermost end portion of the inner wall.

11. The method as defined in claim 8, wherein said shear reinforcement member is composed of a bracket (21) on an side of the outer wall which is secured on the brick or secured between the bricks and a bracket (22) on an side of the inner wall which is tightly secured to the inner wall, and wherein the bracket on the outer wall side is fixed to the brick, the bracket on the inner wall side is fixed to the inner wall, and the brackets on both sides are integrally connected with each other.

12. A method of constructing a wall of an architecture, comprising steps of:

stacking bricks and metal plates, and tightening fasteners extending through bolt holes of the bricks and metal plates so as to integrally connect the vertically adjacent bricks with each other under prestress of the fastener, thereby constructing an outer wall of bricklaying structure outside of a wall of an existing architecture; and

positioning a shear reinforcement member made of a metal on the brick and fixing the shear reinforcement member to the brick by a tightening force of said fastener when the bricks are stacked up to a predetermined layer, so that the existing architecture and the outer wall are connected with each other by said shear reinforcement member, whereby a temporary horizontal load acting on the existing architecture is supported by the outer wall.

13. The method as defined in claim 12, wherein said shear reinforcement member has an overall length such that the member extends over the bricks.

14. The method as defined in claim 12, wherein said outer wall and said wall of the existing architecture are connected with each other by said shear reinforcement members, when the bricks are laid up to a floor level of the existing architecture and a level of an uppermost end portion of the wall of the existing architecture.

15. The method as defined in claim 12, wherein said shear reinforcement member is composed of a bracket (21) on an outer wall side secured onto said brick or secured between the bricks and a bracket (22) on an inner wall side tightly secured to the existing architecture, and wherein the bracket on the outer wall side is fixed to the brick, the bracket on the inner wall side is fixed to the wall of the existing architecture, and the brackets on the outer and inner wall sides are integrally connected with each other.

16. (canceled)

17. The wall structure as defined in claim 4, wherein a temporary allowable shear force of said outer wall is in proportion to the prestress applied to the fastener.

18. The wall structure as defined in claim 17, wherein the temporary allowable shear force Q_{AS} of said outer wall is determined by the following formula:

$$Q_{AS}=t \cdot j \cdot \mu \cdot N_P / A$$

wherein

t: effective thickness of the wall,

j: distance between centers of tension and compression in the wall,

N_P : total amount of prestress (force) applied to a layer which causes slippage,

μ : the coefficient of friction between the brick and a contact surface of a horizontal reinforcement plate,

A: effective cross-sectional area of the wall.

* * * * *