



US008883864B2

(12) **United States Patent**  
**Higuchi et al.**

(10) **Patent No.:** **US 8,883,864 B2**

(45) **Date of Patent:** **\*Nov. 11, 2014**

(54) **PROCESS AND APPARATUS FOR PRODUCING EMULSION AND MICROCAPSULES**

(75) Inventors: **Toshiro Higuchi**, Yokohama (JP); **Toru Torii**, Tokyo (JP); **Takashi Nishisako**, Tokyo (JP); **Tomohiro Taniguchi**, Funabashi (JP)

(73) Assignee: **Japan Science and Technology Agency**, Kawaguchi-shi (JP)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 582 days.  
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/826,845**

(22) Filed: **Jun. 30, 2010**

(65) **Prior Publication Data**

US 2010/0327471 A1 Dec. 30, 2010

**Related U.S. Application Data**

(60) Continuation of application No. 11/287,252, filed on Nov. 28, 2005, now Pat. No. 7,772,287, which is a division of application No. 10/468,015, filed as application No. PCT/JP02/01186 on Feb. 13, 2002, now Pat. No. 7,268,167.

(30) **Foreign Application Priority Data**

Feb. 23, 2001 (JP) ..... 2001-48097  
Aug. 7, 2001 (JP) ..... 2001-238624

(51) **Int. Cl.**

**B01F 13/00** (2006.01)  
**B01F 15/02** (2006.01)  
**B01F 3/08** (2006.01)  
**B01F 5/04** (2006.01)  
**B01J 19/00** (2006.01)

**B01J 13/04** (2006.01)  
**B01L 3/00** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **B01F 13/0062** (2013.01); **B01F 13/0076** (2013.01); **B01F 15/0255** (2013.01);

(Continued)

(58) **Field of Classification Search**  
None  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,908,112 A \* 3/1990 Pace ..... 210/198.2  
5,072,864 A 12/1991 Luhrs et al.

(Continued)

**FOREIGN PATENT DOCUMENTS**

GB 2063695 A \* 6/1981 ..... B01F 3/08  
**OTHER PUBLICATIONS**

Dynamic Patter Formation in a Vesicle Generating Microfluidic Device, Thorsen et al., Physical Review Letters, vol. 86, No. 18, Apr. 30, 2001, p. 4163-4166.\*


(Continued)

*Primary Examiner* — James J Seidleck  
*Assistant Examiner* — Peter A Salamon  
(74) *Attorney, Agent, or Firm* — Oblon, Spivak, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A process and apparatus for rapidly producing an emulsion and microcapsules in a simple manner is provided wherein a dispersion phase is ejected from a dispersion phase-feeding port toward a continuous phase flowing in a microchannel in such a manner that flows of the dispersion phase and the continuous phase cross each other, thereby obtaining microdroplets, formed by the shear force of the continuous phase, having a size smaller than the width of the channel for feeding the dispersion phase.

**3 Claims, 12 Drawing Sheets**

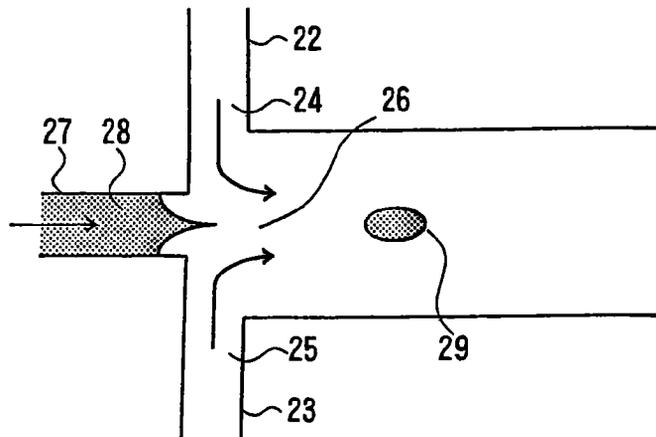

- (52) **U.S. Cl.**  
 CPC ..... **B01F 3/0807** (2013.01); **B01F 5/0471**  
 (2013.01); **Y10S 366/04** (2013.01); **B01J**  
**2219/00783** (2013.01); **B01F 5/045** (2013.01);  
**B01F 15/0201** (2013.01); **Y10S 516/927**  
 (2013.01); **B01J 19/0093** (2013.01); **B01F**  
**2003/0834** (2013.01); **B01J 2219/00853**  
 (2013.01); **B01F 2003/0838** (2013.01); **B01L**  
**3/5027** (2013.01); **B01J 13/04** (2013.01); **Y10S**  
**516/924** (2013.01); **B01F 3/0811** (2013.01);  
**B01F 2215/0431** (2013.01)  
 USPC ..... **516/2**; 425/10; 366/DIG. 4; 516/927;  
 516/924

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,632,876	A *	5/1997	Zanzucchi et al. ....	204/600
5,718,922	A	2/1998	Herrero-Vanrell et al.	
5,827,707	A	10/1998	Lamberti	
5,915,925	A	6/1999	North, Jr.	
6,032,689	A	3/2000	Tsai et al.	
6,033,544	A *	3/2000	Demers et al. ....	204/450
6,103,537	A *	8/2000	Ullman et al. ....	436/526

6,136,171	A *	10/2000	Frazier et al. ....	204/450
6,170,981	B1 *	1/2001	Regnier et al. ....	366/336
6,177,479	B1	1/2001	Nakajima et al.	
6,258,858	B1 *	7/2001	Nakajima et al. ....	516/73
6,281,254	B1 *	8/2001	Nakajima et al. ....	516/53
6,334,676	B1 *	1/2002	Kaszczuk et al. ....	347/96
6,387,301	B1 *	5/2002	Nakajima et al. ....	264/4.4
6,408,884	B1 *	6/2002	Kamholz et al. ....	137/827
7,032,607	B2 *	4/2006	Burns .....	137/14
7,268,167	B2 *	9/2007	Higuchi et al. ....	516/9
7,375,140	B2	5/2008	Higuchi et al.	
7,717,615	B2	5/2010	Higuchi et al.	
7,772,287	B2 *	8/2010	Higuchi et al. ....	516/21
2004/0134854	A1	7/2004	Higuchi et al.	
2004/0228882	A1 *	11/2004	Qiu et al. ....	424/400
2004/0234566	A1 *	11/2004	Qiu et al. ....	424/401
2006/0120213	A1 *	6/2006	Tonkovich et al. ....	366/144
2007/0196397	A1 *	8/2007	Torii et al. ....	424/400
2008/0182910	A1 *	7/2008	Qiu et al. ....	516/21

OTHER PUBLICATIONS

Formation of Droplets and Bubbles in a Microfluidic T-Junction scaling and Mechanism of Break-up, Garstecki et al. Royal Society of Chemistry, Lab on a Chip, 2006, 6, p. 437-446.\*

\* cited by examiner

FIG. 1

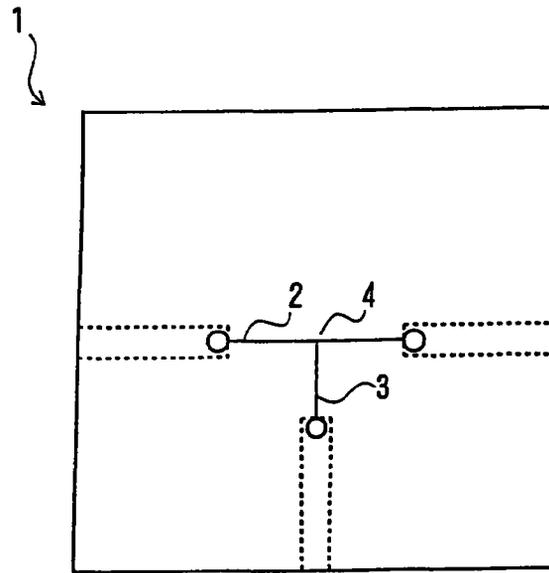


FIG. 2

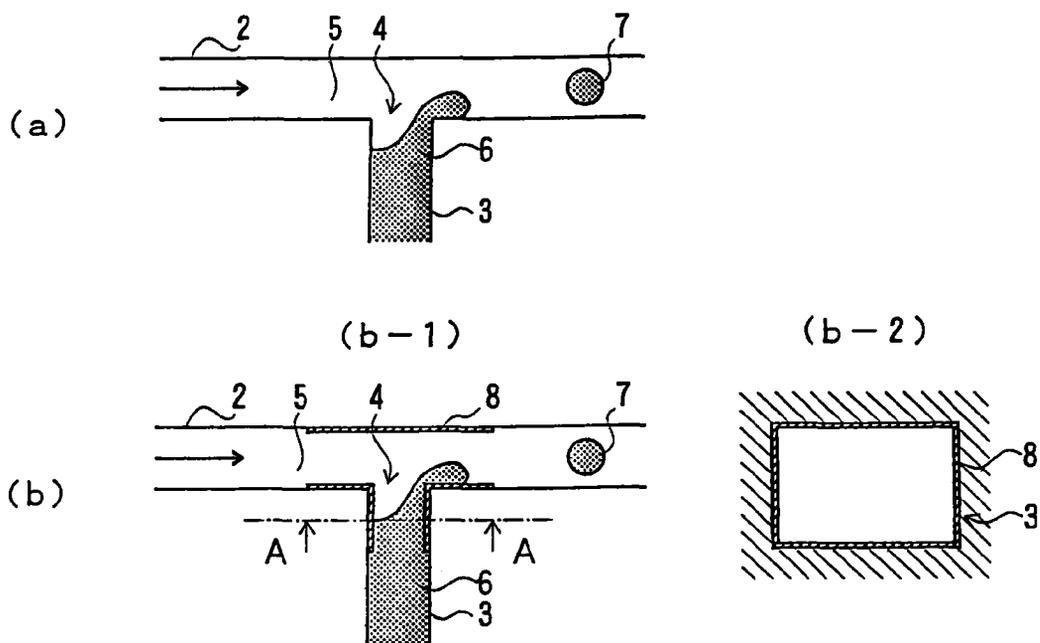


FIG. 3

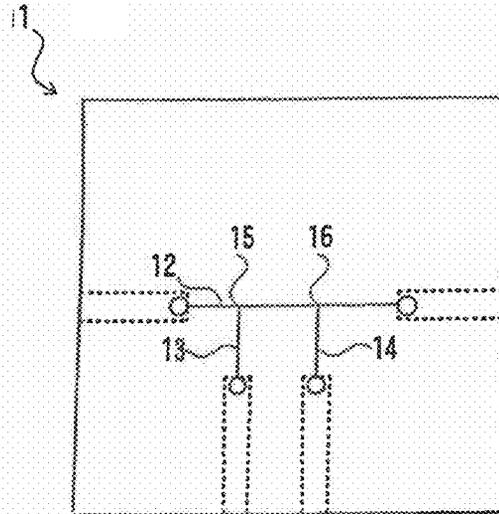


FIG. 4

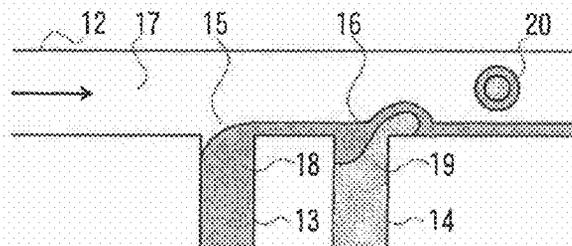


FIG. 5

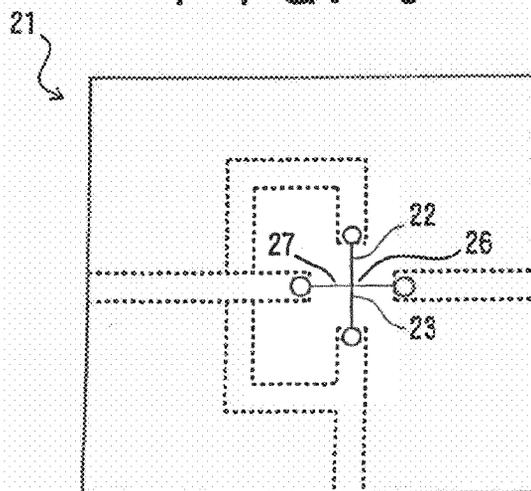


FIG. 6

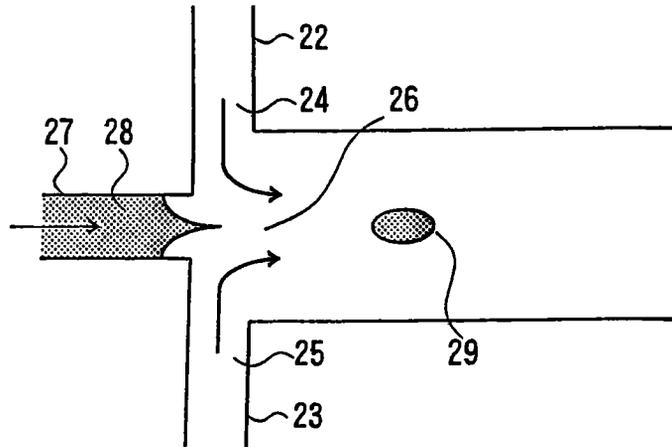


FIG. 7

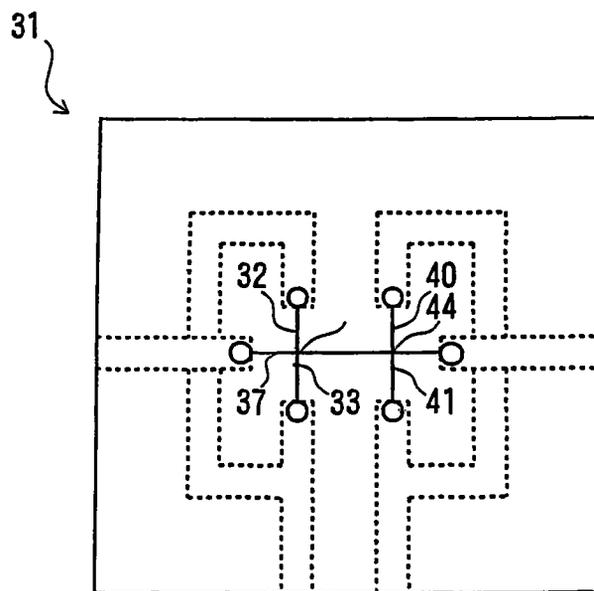


FIG. 8



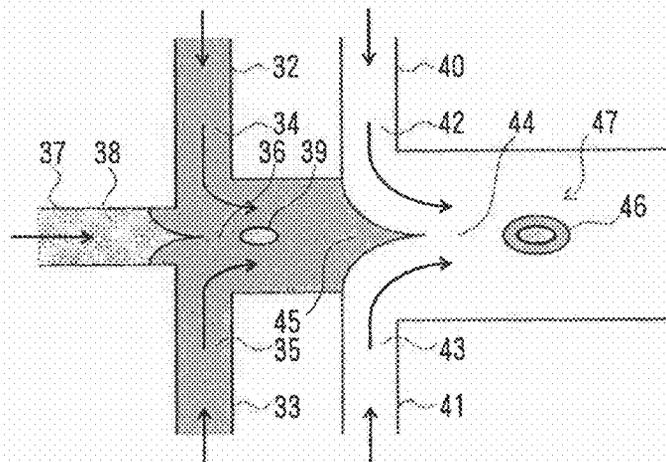


FIG. 9

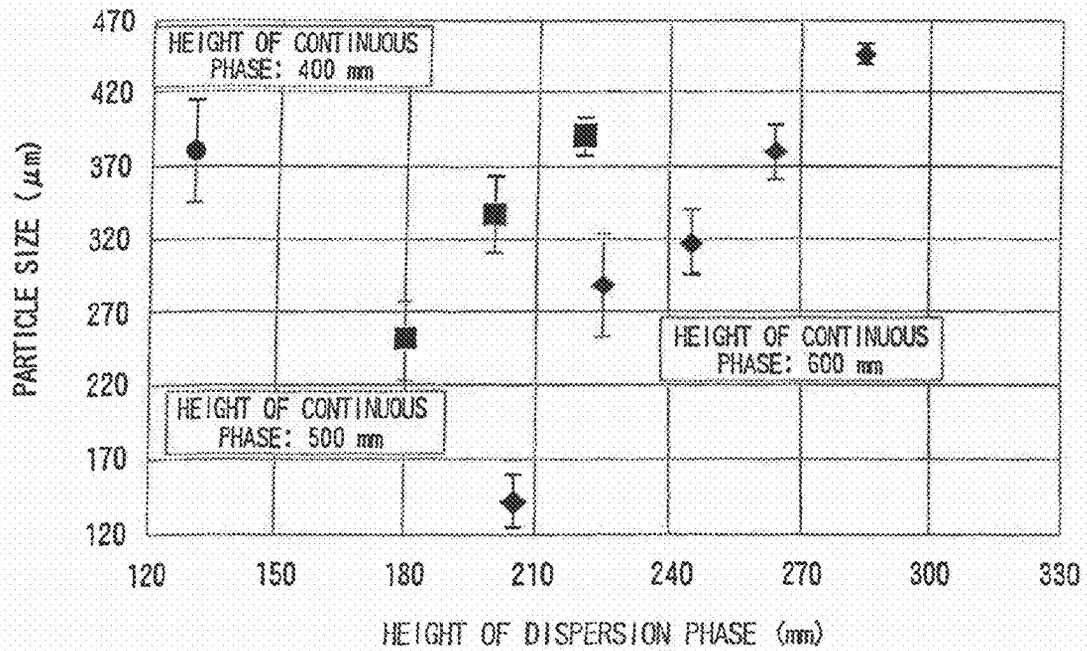

# FIG. 10

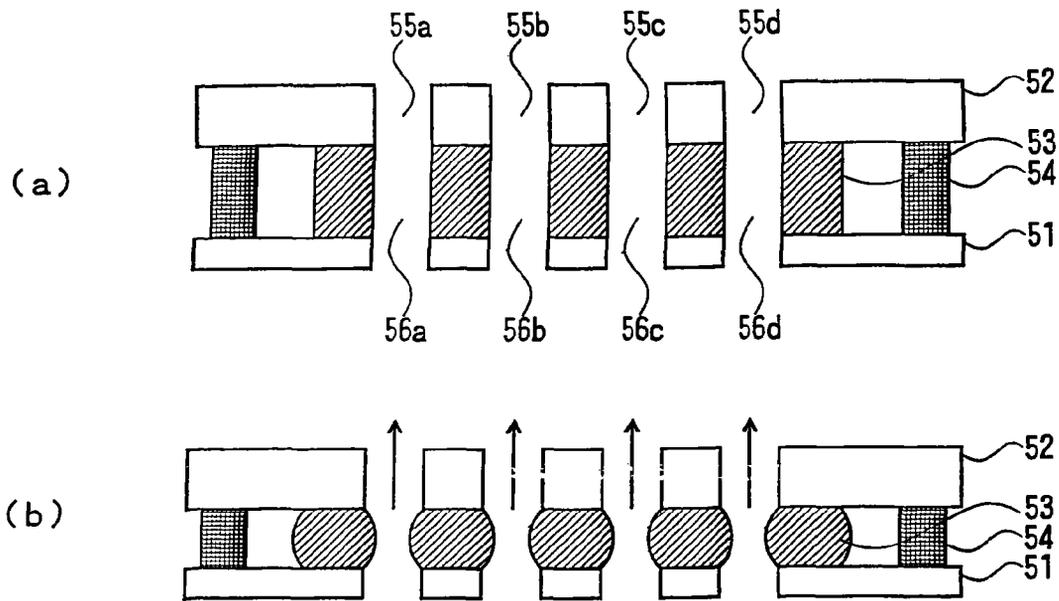

# FIG. 11

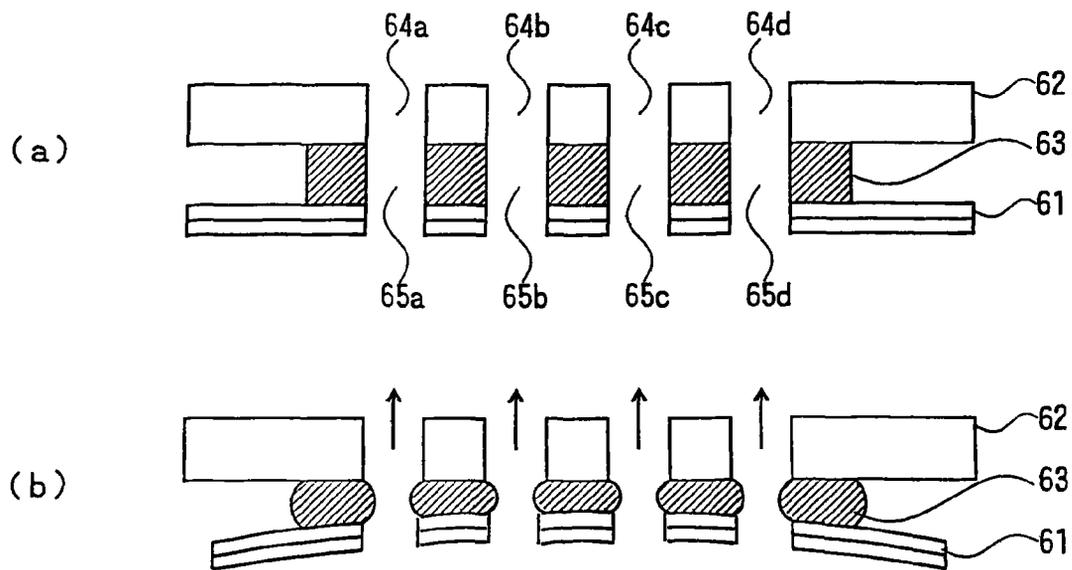


FIG. 12

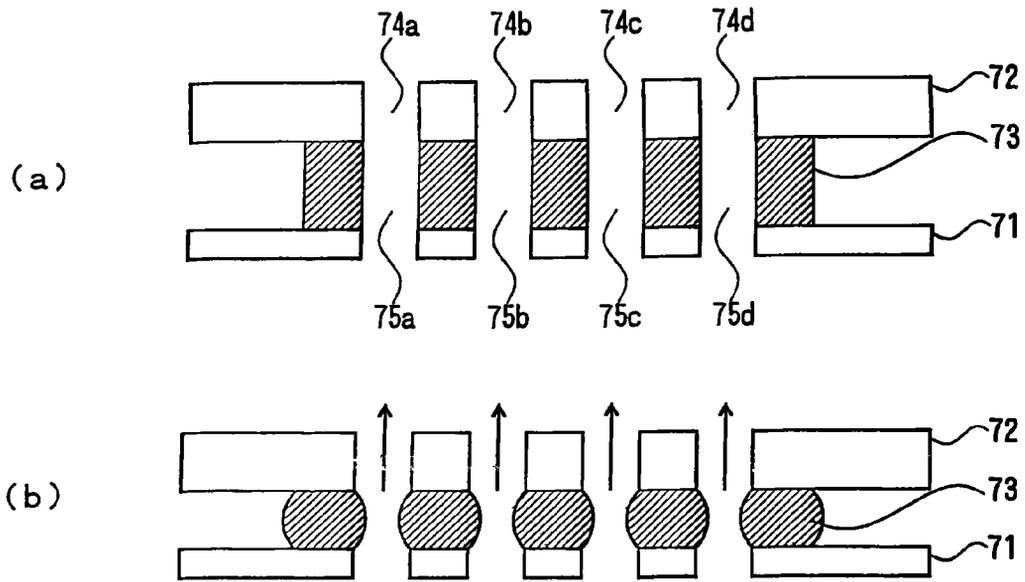


FIG. 13

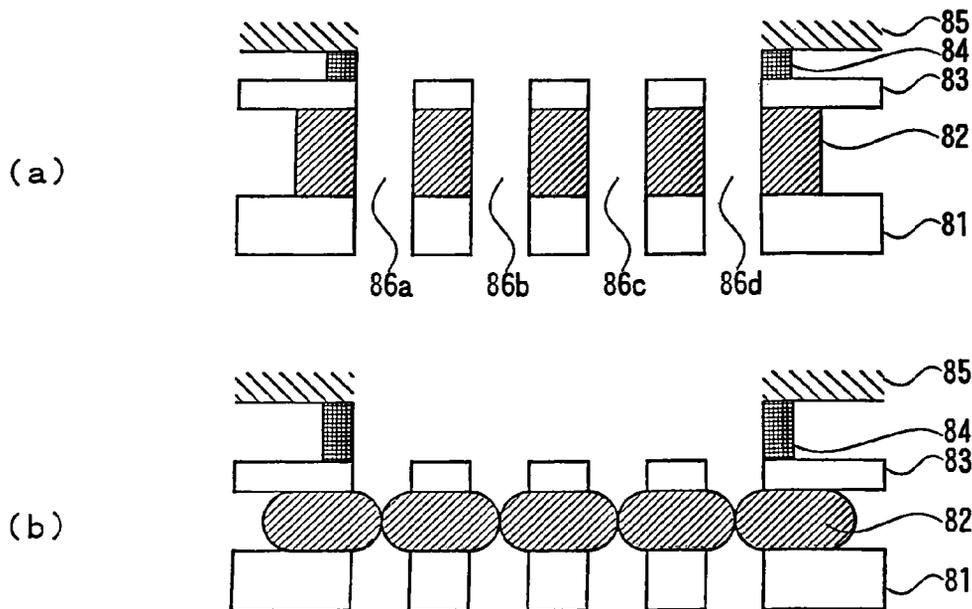


FIG. 14

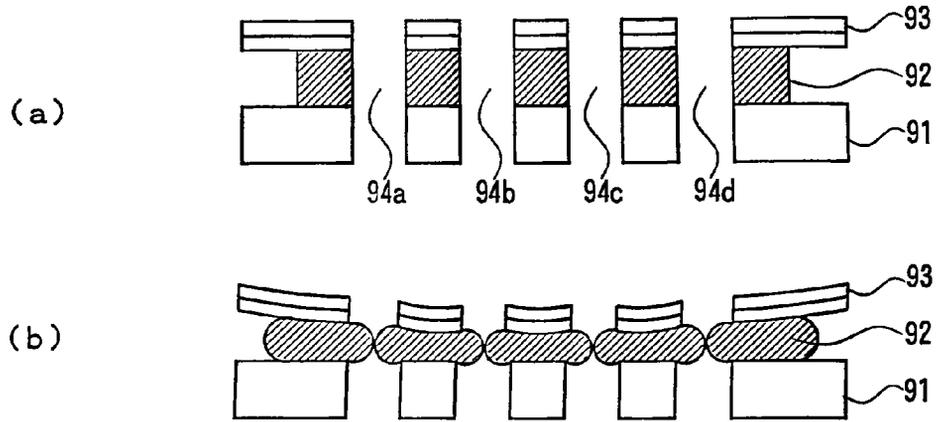


FIG. 15

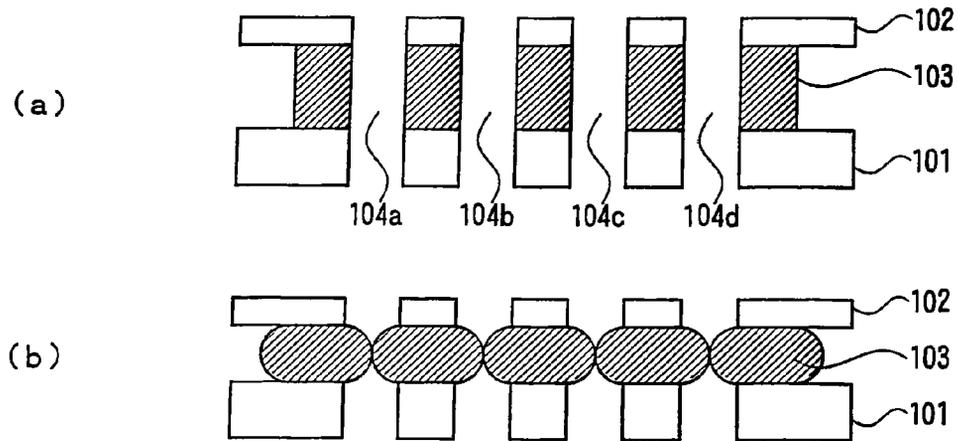


FIG. 16

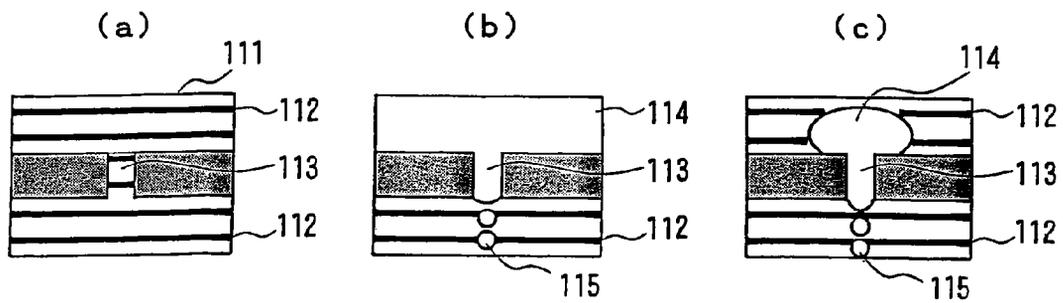


FIG. 17

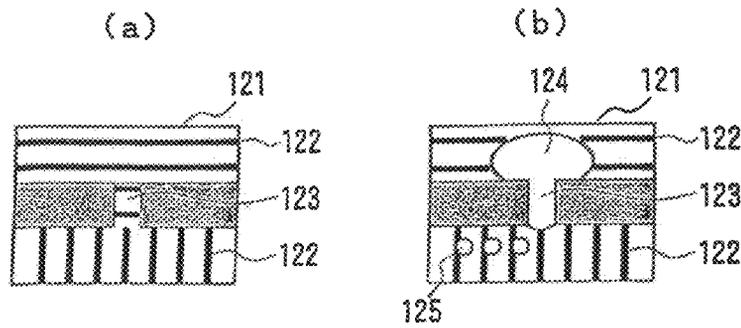


FIG. 18

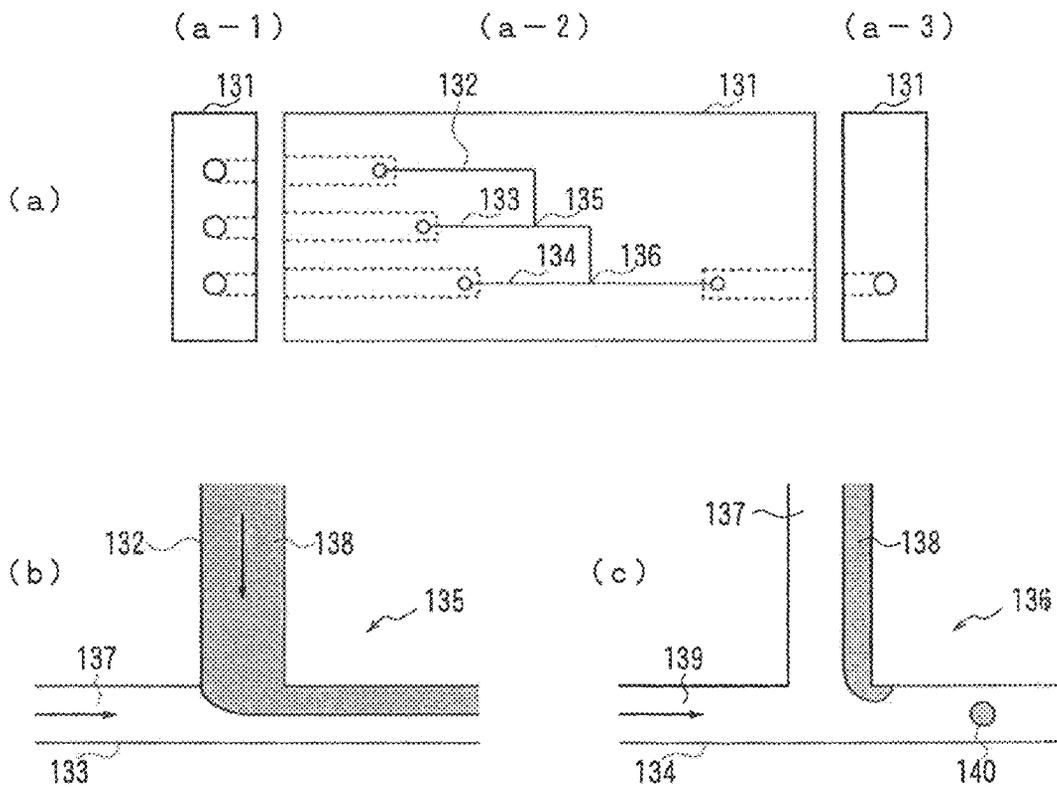


FIG. 19

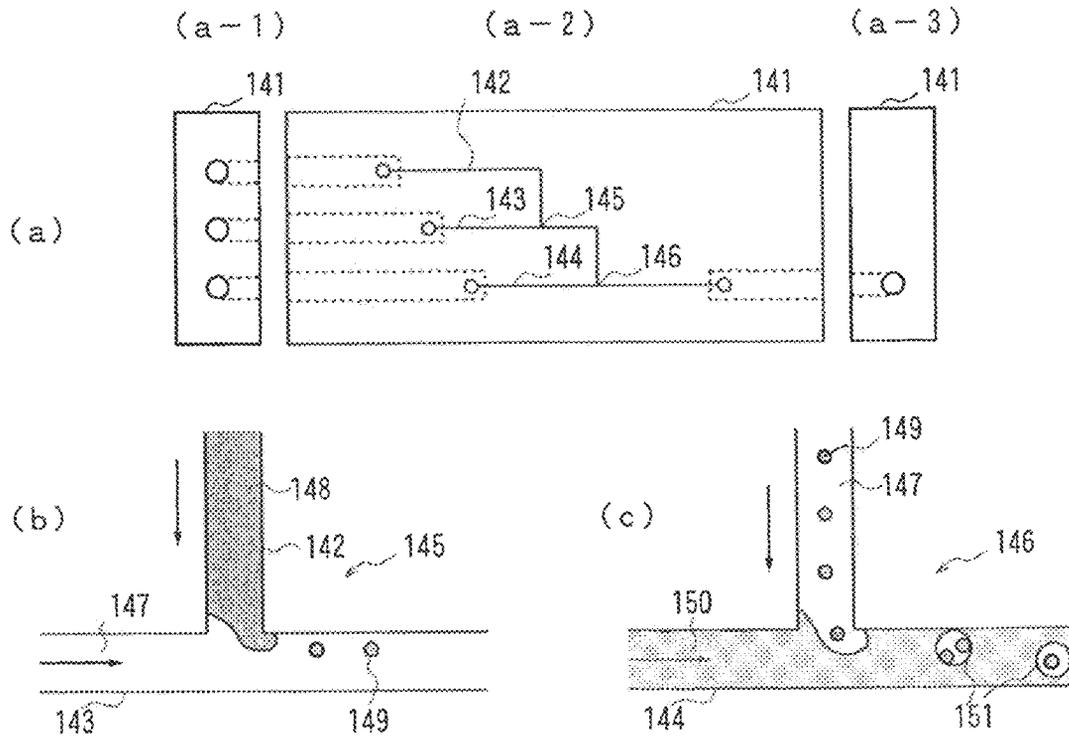


FIG. 20

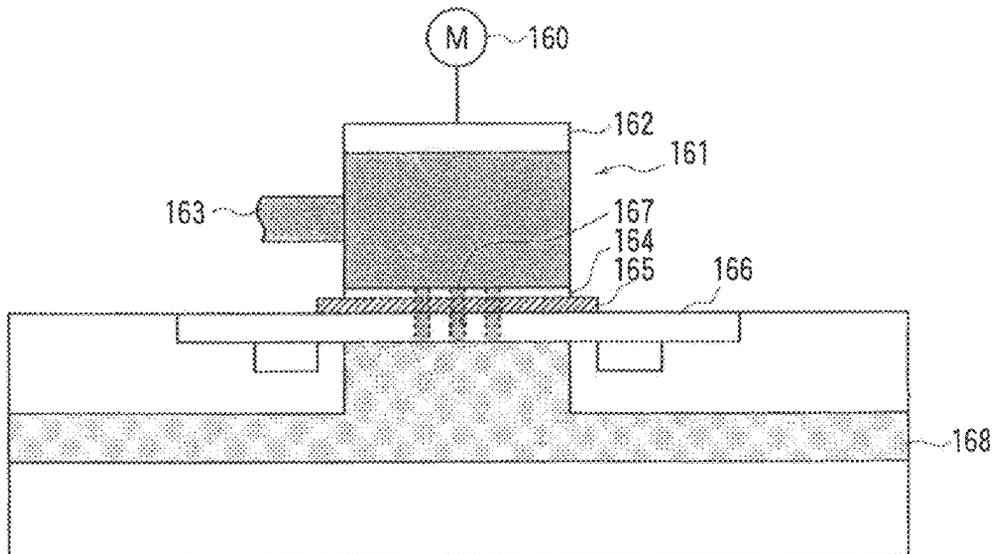


FIG. 21

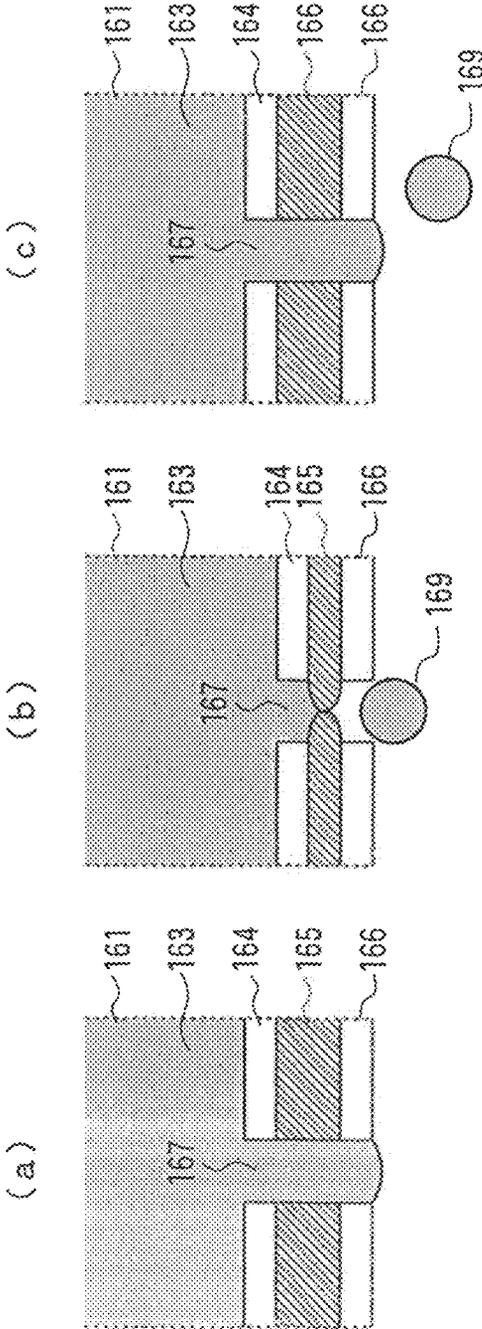


FIG. 22


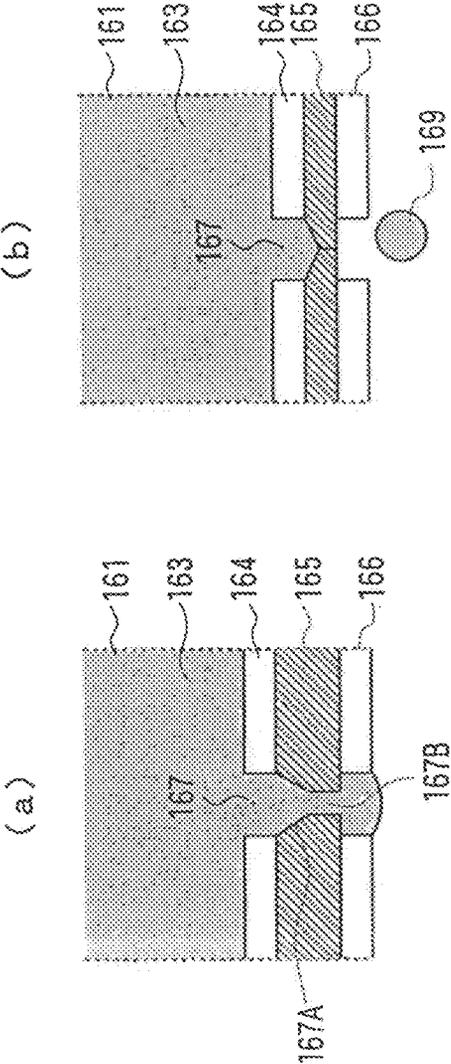


FIG. 23

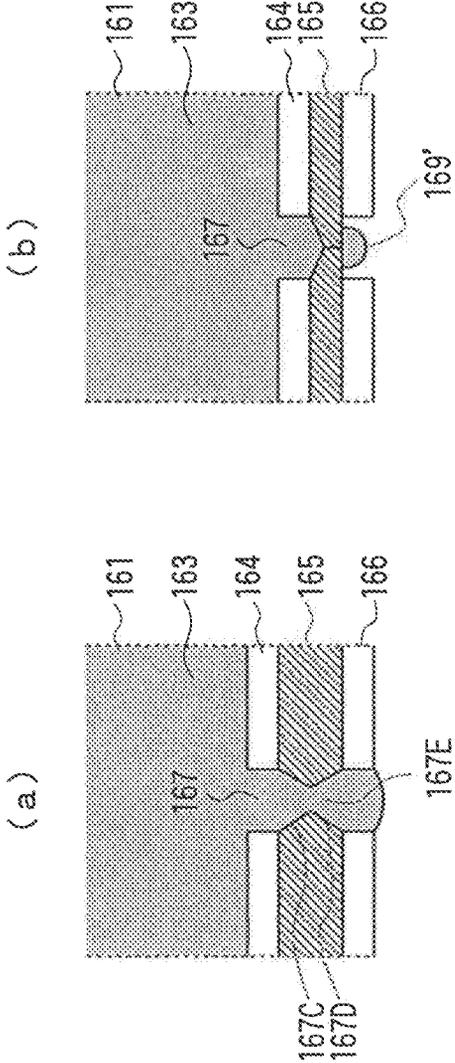

1

## PROCESS AND APPARATUS FOR PRODUCING EMULSION AND MICROCAPSULES

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. Ser. No. 11/287, 252 filed Nov. 28, 2005, now U.S. Pat. No. 7,772,287, which is a divisional of U.S. Ser. No. 10/468,015 filed Aug. 22, 2003, now U.S. Pat. No. 7,268,167, which is a 371 application of PCT/JP02/01186 filed Feb. 13, 2002 and claims the benefit of JP 2001-48097 filed Feb. 23, 2001 and JP 2001-238624 filed Aug. 7, 2001.

### TECHNICAL FIELD

The present invention relates to a process and apparatus for producing a microemulsion and microcapsules in water, oil, and chemically inert liquid.

### BACKGROUND ART

Conventionally, apparatuses for producing a microemulsion (containing microspheres) and microcapsules have been used in steps of manufacturing chemicals and some processes have been proposed. There are the following processes (see, for example, PCT Japanese Translation Patent Application Publication No. 8-508933): a process in which a second solution is dropped in a first solution, a process in which a first solution is dropped in the air from the inside portion of a double tube and a second solution is dropped from the outside portion thereof, and so on. Among processes for scattering droplets in the air, there is a process for ejecting droplets using piezoelectric elements used for inkjet printers and so on.

### DISCLOSURE OF INVENTION

On the other hand, a technique in which monodispersed microdroplets are prepared with laboratory equipment is disclosed in Japanese Unexamined Patent Application Publication No. 2000-84384. However, in this technique, there is a problem in that the rate of preparing such microdroplets is low and the microdroplets cannot be covered with surfactants or microcapsule shells. Furthermore, only microdroplets having a diameter three times larger than the width of microchannels can be prepared.

In view of the above situation, it is an object of the present invention to provide a process and apparatus for rapidly producing an emulsion and microcapsules in a simple manner.

In order to achieve the above object, the present invention provides the following methods and apparatuses.

(1) A process for producing an emulsion includes a step of ejecting a dispersion phase from a dispersion phase-feeding port toward a continuous phase flowing in a microchannel in such a manner that flows of the dispersion phase and the continuous phase cross each other, whereby microdroplets are formed by the shear force of the continuous phase and the size of the microdroplets is controlled.

(2) A process for producing microcapsules includes a step of feeding a shell-forming phase and a content-forming phase to a continuous phase flowing in a microchannel, in such a manner that flows of the shell-forming phase and the content-forming phase join the flow of the continuous phase, to obtain microcapsules, wherein the shell-forming phase is fed from

2

positions upstream to positions for feeding the content-forming phase in such a manner that the shell-forming phase forms a thin layer.

(3) A process for producing an emulsion includes a step of ejecting a dispersion phase toward the junction of flows of continuous phases flowing in microchannels extending in the directions opposite to each other, in such a manner that the flow of the dispersion phase joins the flows of the continuous phases, to obtain microdroplets.

(4) A process for producing microcapsules includes a step of feeding a content-forming phase to first and second continuous phases flowing in first and second microchannels extending in the directions opposite to each other, in such a manner that the flow of the content-forming phase joins the flows of the first and second continuous phases, to form microdroplets for forming contents; and then feeding a shell-forming phase to third and fourth continuous phases flowing in third and fourth microchannels, in such a manner that the flow of the shell-forming phase joins the junction of flows of the third and fourth continuous phases, to form microdroplets for forming shells to obtain microcapsules.

(5) A process for producing an emulsion includes a step of allowing flows of a first continuous phase and a dispersion phase to join together at a first junction to form a two-phase flow and then allowing the two-phase flow, consisting of the flows of the first continuous phase and the dispersion phase joined together, to join a flow of a second continuous phase at a second junction to form an emulsion containing the dispersion phase.

(6) A process for producing microcapsules includes a step of allowing flows of a first continuous phase and a dispersion phase to join together at a first junction to form microdroplets and then allowing the flow of the first continuous phase containing the microdroplets to join a flow of a second continuous phase at a second junction to form microcapsules containing the first continuous phase containing the microcapsules.

(7) An apparatus for producing an emulsion includes means for forming a continuous phase flowing in a microchannel, means for feeding a dispersion phase to the continuous phase in such a manner that flows of the continuous phase and the dispersion phase cross each other, dispersion phase-ejecting means for ejecting the dispersion phase from a dispersion phase-feeding port, and means for forming microdroplets by the shear force of the continuous phase to control the size of the microdroplets.

(8) An apparatus for producing microcapsules includes means for forming a continuous phase flowing in a microchannel, means for feeding a shell-forming phase and a content-forming phase to a dispersion phase in such a manner that flows of the shell-forming phase and content-forming phase join the flow of the continuous phase, and means for feeding the shell-forming phase from positions upstream to positions for feeding the content-forming phase in such a manner that shell-forming phase forms a thin layer.

(9) An apparatus for producing an emulsion includes means for forming continuous phases flowing in microchannels extending in the directions opposite to each other; and means for ejecting a dispersion phase toward the junction of flows of the continuous phases, in such a manner that the flow of the dispersion phase joins the flows of the continuous phases, to obtain microdroplets.

(10) An apparatus for producing microcapsules includes means for feeding a content-forming phase to first and second continuous phases flowing in first and second microchannels extending in the directions opposite to each other, in such a manner that the flow of the content-forming phase joins the

3

flows of the first and second continuous phases, to form microdroplets for forming contents; and then feeding a shell-forming phase to third and fourth continuous phases flowing in third and fourth microchannels, in such a manner that the flow of the shell-forming phase joins the junction of flows of the third and fourth continuous phases, to form coatings for forming shells to obtain microcapsules.

(11) In the emulsion-producing apparatus described in the above article (7) or (9), the means for feeding a plurality of the dispersion phases each include a substrate, a driven plate, an elastic member disposed between the substrate and the driven plate, and an actuator for driving the driven plate and thereby a plurality of the dispersion phases are fed at the same time.

(12) In the microcapsule-producing apparatus described in the above article (8) or (10), the means for feeding a plurality of shell-forming phases and content-forming phases each include a substrate, a driven plate, an elastic member disposed between the substrate and the driven plate, and an actuator for driving the driven plate, and thereby a plurality of the shell-forming phases and content-forming phases are fed at the same time.

(13) The emulsion-producing apparatus described in the above article (7) or (9) further includes films, disposed on portions of inner wall surfaces of the microchannel in which the continuous phase flows and the channel for feeding the dispersion phase, for readily forming the microdroplets, wherein the portions include the junction of the flows of the continuous phase and the dispersion phase and the vicinity of the junction.

(14) The microcapsule-producing apparatus described in the above article (8) or (10) further includes films, disposed on portions of inner wall surfaces of the microchannel in which the continuous phase flows and the channel for feeding the dispersion phase, for readily forming the microdroplets, wherein the portions include the junction of the flows of the continuous phase and the dispersion phase and the vicinity of the junction.

(15) An apparatus for producing an emulsion includes a substrate having parallel electrodes and a microchannel disposed on the substrate, wherein a dispersion phase disposed at the upstream side of the microchannel is attracted and then ejected by a moving electric field, applied to the parallel electrodes, to form the emulsion.

(16) In the emulsion-producing apparatus described in the above article (15), the arrangement of the parallel electrodes disposed at the side close to the continuous phase is changed, whereby the formed emulsion is guided in a predetermined direction.

(17) In the emulsion-producing apparatus described in the above article (15), the moving speed of the moving electric field applied to the parallel electrodes is varied, whereby the forming rate of the emulsion is varied.

(18) An apparatus for producing an emulsion includes an elastic member disposed between rigid members, placed at a lower section of a liquid chamber for a dispersion phase, having a plurality of microchannels therein; an actuator for applying a stress to the elastic member; and a continuous phase communicatively connected to a plurality of the microchannels.

(19) In the emulsion-producing apparatus described in the above article (18), a plurality of the microchannels each have a section, of which the diameter is decreased, having a tapered portion.

(20) In the emulsion-producing apparatus described in the above article (18), a plurality of the microchannels each have a lower section, of which the diameter is decreased, having a

4

first tapered portion and also each have a protrusion having a second tapered portion for increasing the diameter of a further lower section.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view showing a microdroplet-producing apparatus according to a first embodiment of the present invention.

FIG. 2 is an illustration showing microdroplet-producing processes according to the first embodiment of the present invention.

FIG. 3 is a plan view showing a microcapsule-producing apparatus according to a second embodiment of the present invention.

FIG. 4 is an illustration showing a microcapsule-producing process according to the second embodiment of the present invention.

FIG. 5 is a plan view showing a microdroplet-producing apparatus according to a third embodiment of the present invention.

FIG. 6 is an illustration showing a microdroplet-producing process according to the third embodiment of the present invention.

FIG. 7 is a plan view showing a microcapsule-producing apparatus according to a fourth embodiment of the present invention.

FIG. 8 is an illustration showing a microcapsule-producing process according to the fourth embodiment of the present invention.

FIG. 9 is an illustration showing the particle size obtained by varying the height of the continuous phases and dispersion phases in the fourth embodiment of the present invention.

FIG. 10 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a fifth embodiment of the present invention.

FIG. 11 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a sixth embodiment of the present invention.

FIG. 12 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a seventh embodiment of the present invention.

FIG. 13 is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to an eighth embodiment of the present invention.

FIG. 14 is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to a ninth embodiment of the present invention.

FIG. 15 is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to a tenth embodiment of the present invention.

FIG. 16 is a plan view showing an emulsion-producing apparatus according to an eleventh embodiment of the present invention.

FIG. 17 is a plan view showing an emulsion-producing apparatus according to a twelfth embodiment of the present invention.

FIG. 18 is an illustration showing an emulsion-forming apparatus according to a thirteenth embodiment of the present invention.

5

FIG. 19 is an illustration showing a microcapsule-forming apparatus according to a fourteenth embodiment of the present invention.

FIG. 20 is an illustration showing a configuration of an apparatus for forming a large amount of microdroplets using the elastic deformation of rubber.

FIG. 21 is an illustration showing the operation of a first apparatus, shown in FIG. 20, for forming a large amount of microdroplets.

FIG. 22 is an illustration showing the operation of a second apparatus, shown in FIG. 20, for forming a large amount of microdroplets.

FIG. 23 is an illustration showing the operation of a third apparatus, shown in FIG. 20, for forming a large amount of microdroplets.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Embodiments of the present invention will now be described in detail.

FIG. 1 is a plan view showing an apparatus for producing microdroplets according to a first embodiment of the present invention, and FIG. 2 is an illustration showing processes for producing such microdroplets. FIG. 2(a) is an illustration showing a microdroplet-producing process (No. 1), FIG. 2(b) is another illustration showing a microdroplet-producing process (No. 2), FIG. 2(b-1) is a fragmentary sectional view thereof, and FIG. 2(b-2) is the sectional view of FIG. 2(b-1) taken along the line A-A.

In these figures, reference numeral 1 represents a main body of the microdroplet-producing apparatus, reference numeral 2 represents a microchannel in which a continuous phase flows and which is disposed in the main body 1, reference numeral 3 represents a dispersion phase-feeding channel placed such that the dispersion phase-feeding channel 3 and the microchannel 2 cross, reference numeral 4 represents a dispersion phase-feeding port, reference numeral 5 represents the continuous phase (for example, oil), reference numeral 6 represents a dispersion phase (for example, water), reference numeral 7 represents a microdroplet, and reference numeral 8 represents hydrophobic film.

In the above configuration, the dispersion phase 6 is fed to the continuous phase 5 flowing in the microchannel 2 in such a manner that flows of the dispersion phase 6 and the continuous phase 5 cross each other, as shown in FIG. 2. Part of the continuous phase 5 extends through each dispersion phase-feeding port 4, thereby producing the microdroplets 7 having a diameter smaller than the width of the dispersion phase-feeding channel 3.

For example, microdroplets having a diameter of about 25  $\mu\text{m}$  can be obtained when the pressure of the dispersion phase (water) 6 is set to 2.45 kPa, the pressure of the continuous phase (oil containing 70% of oleic acid) 5 is set to 4.85 kPa, and the microchannel 2 and the dispersion phase-feeding channel 3 have a width of 100  $\mu\text{m}$  and a height of 100  $\mu\text{m}$ . When the pressure of the continuous phase is set to 5.03 kPa, microdroplets having a diameter of about 5  $\mu\text{m}$  can be obtained.

As shown in FIGS. 2(b-1) and 2(b-2), in order to readily form the microdroplets 7 (in order to readily repelling the microdroplets), the hydrophobic films 8 are preferably disposed on portions of the inner walls of the microchannel 2, in which the continuous phase 5 flows, and the dispersion phase-feeding channel 3, wherein the portions are disposed at the

6

vicinity of the junction of the flows of the continuous phase (for example, oil) 5 and the dispersion phase (for example, water) 6.

In the above embodiment, since the continuous phase 5 contains oil and the dispersion phase 6 contains water, the hydrophobic films 8 are preferably used. However, when the continuous phase contains water and the dispersion phase contains oil, hydrophilic films are preferably used.

FIG. 3 is a plan view showing an apparatus for producing microcapsules according to a second embodiment, and FIG. 4 is an illustration showing a process for producing such microcapsules.

In these figures, reference numeral 11 represents a main body of the microcapsule-producing apparatus, reference numeral 12 represents a microchannel in which a continuous phase flows and which is disposed in the main body 11, reference numeral 13 represents a shell-forming phase-feeding channel placed such that the shell-forming phase-feeding channel 13 and the microchannel 12 cross, reference numeral 14 represents a content-forming phase-feeding channel placed such that the content-forming phase-feeding channel 14 and the microchannel 12 cross, reference numeral 15 represents a shell-forming phase-feeding port, reference numeral 16 represents a content-forming phase-feeding port, reference numeral 17 represents the continuous phase (for example, water), reference numeral 18 represents a shell-forming phase, reference numeral 19 represents a content-forming phase, and reference numeral 20 represents a microcapsule.

In the above configuration, the shell-forming phase 18 and the content-forming phase 19 are fed to the continuous phase 17 flowing in the microchannel 12 in such a manner that flows of the shell-forming phase 18 and the content-forming phase 19 join the flow of the continuous phase 17, as shown in FIG. 4. The shell-forming phase 18 is fed from positions upstream to positions for feeding the content-forming phase 19 in such a manner that shell-forming phase 18 forms a thin layer.

FIG. 5 is a plan view showing an apparatus for producing microdroplets according to a third embodiment, and FIG. 6 is an illustration showing a process for producing such microdroplets.

In these figures, reference numeral 21 represents a main body of the microdroplet-producing apparatus, reference numeral 22 represents a first microchannel, reference numeral 23 represents a second microchannel, reference numeral 24 represents a first continuous phase, reference numeral 25 represents a second continuous phase, reference numeral 26 represents the junction of flows of the first continuous phase 24 and the second continuous phase 25, reference numeral 27 represents a dispersion phase-feeding channel, reference numeral 28 represents a dispersion phase, and reference numeral 29 represents a microdroplet.

In the above configuration, the dispersion phase 28 is ejected toward the junction 26 of flows of the first continuous phase 24 and the second continuous phase 25 flowing in the microchannels 22 and 23, respectively, in such a manner that the flow of the dispersion phase 28 joins the flows of the first continuous phase 24 and the second continuous phase 25, as shown in FIG. 6. Thereby, the microdroplets 29 can be produced.

FIG. 7 is a plan view showing an apparatus for producing microcapsules according to a fourth embodiment, and FIG. 8 is an illustration showing a process for producing such microcapsules.

In these figures, reference numeral 31 represents a main body of the microcapsule-producing apparatus, reference numeral 32 represents a first microchannel in which a con-

tinuous phase flows and which is disposed in the main body 31, reference numeral 33 represents a second microchannel in which another continuous phase flows and which is disposed in the main body 31, reference numeral 34 represents a first continuous phase (for example, oil), reference numeral 35 represents a second continuous phase (for example, oil), reference numeral 36 represents the junction of flows of the first continuous phase 34 and the second continuous phase 35, reference numeral 37 represents a content-forming phase-feeding channel, reference numeral 38 represents a content-forming phase (for example, water), reference numeral 39 represents a microdroplet (for example, water spheres), reference numeral 40 represents a third microchannel in which another continuous phase flows and which is disposed in the main body 31, reference numeral 41 represents a fourth microchannel in which another continuous phase flows and which is disposed in the main body 31, reference numeral 42 represents a third continuous phase (for example, water), reference numeral 43 represents a fourth continuous phase (for example, water), reference numeral 44 represents the junction of flows of the third continuous phase 42 and the fourth continuous phase 43, reference numeral 45 represents a shell-forming phase, reference numeral 46 represents a shell-forming microdroplet, and reference numeral 47 represents a microcapsule.

In the above configuration, the content-forming phase 38 is fed to the continuous phases 34 and 35 flowing in the first and second microchannels 32 and 33, respectively, in such a manner that the flow of the content-forming phase 38 joins the flows of the continuous phases 34 and 35. Thereby, the microdroplets 39 for forming contents are formed.

Subsequently, the shell-forming phase 45 containing the first and second continuous phases 34 and 35 mixed together is fed to the continuous phases 42 and 43 flowing in the third and fourth microchannels 40 and 41 in such a manner that the flow of the shell-forming phase 45 joins the junction of the flows of the third and fourth continuous phases 42 and 43. Thereby, a coating for forming a shell is formed on each microdroplet 39 for forming a content, thereby forming each microcapsule 47.

In this embodiment, the microcapsule 47 contains the single microdroplet 39. However, the microcapsule 47 may contain a plurality of the microdroplets 39.

FIG. 9 shows the particle size obtained by varying the height (which can be converted into the pressure) of the continuous phases and dispersion phases, when the first and second microchannels 32 and 33 and the content-forming phase-feeding channel 37 have a width of 100  $\mu\text{m}$  and a height of 100  $\mu\text{m}$  and the channel in which the microdroplets 39 are present have a width of 500  $\mu\text{m}$  and a height of 100  $\mu\text{m}$ . It is clear that the particle size can be controlled by varying the height (which can be converted into the pressure) of the continuous phases and dispersion phases.

FIG. 10 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a fifth embodiment of the present invention. FIG. 10(a) is an illustration showing such a situation that piezoelectric actuators are expanded and therefore such a phase is not ejected, and FIG. 10(b) is an illustration showing such a situation that the piezoelectric actuators are contracted to eject the phase.

In these figures, reference numeral 51 represents a substrate, reference numeral 52 represents a driven plate, reference numeral 53 represents rubber, reference numeral 54 represents the piezoelectric actuators each disposed at the corresponding ends of the driven plate 52, reference numerals

55a-55d represent a plurality of feeding ports, and reference numerals 56a-56d represent a plurality of channels arranged for a single dispersion phase. A back pressure is applied to the bottom portion of the dispersion phase.

As shown in FIG. 10(a), a plurality of the channels 56a-56d are arranged, and the dispersion phase can be ejected therefrom at the same time when the piezoelectric actuators 54 are contracted, as shown in FIG. 10(b).

Various actuators may be used instead of the above piezoelectric actuators.

FIG. 11 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a sixth embodiment of the present invention. FIG. 11(a) is an illustration showing such a situation that a bimorph actuator is not warped and therefore such a phase is not ejected, and FIG. 11(b) is an illustration showing such a situation that the bimorph actuator is warped, thereby ejecting the phase.

In these figures, reference numeral 61 represents the bimorph actuator, reference numeral 62 represents a fixed plate, reference numeral 63 represents rubber, reference numerals 64a-64d represent a plurality of feeding ports, and reference numerals 65a-65d represent a plurality of channels arranged for a single dispersion phase. A back pressure is applied to the bottom portion of the dispersion phase.

As shown in FIG. 11(a), a plurality of the channels 65a-65d are arranged, and the dispersion phase can be ejected therefrom at the same time by the operation (upward warping) of the bimorph actuator 61, as shown in FIG. 11(b).

FIG. 12 is an illustration showing a mechanism for ejecting a dispersion phase, a shell-forming phase, or a content-forming phase placed in a microdroplet-producing apparatus according to a seventh embodiment of the present invention. FIG. 12(a) is an illustration showing such a situation that an electrostrictive polymer is not energized and therefore such a phase is not ejected, and FIG. 12(b) is an illustration showing such a situation that the electrostrictive polymer is energized (contracted), thereby ejecting the phase.

In these figures, reference numeral 71 represents a substrate, reference numeral 72 represents a driven plate, reference numeral 73 represents the electrostrictive polymer, reference numerals 74a-74d represent a plurality of feeding ports, and reference numerals 75a-75d represent a plurality of channels arranged for a single dispersion phase. A back pressure is applied to the bottom portion of the dispersion phase.

As shown in FIG. 12(a), a plurality of the channels 75a-75d are arranged, and the dispersion phase can be ejected therefrom at the same time by the operation (contraction) of the electrostrictive polymer 73, as shown in FIG. 12(b).

FIG. 13 is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to an eighth embodiment of the present invention. FIG. 13(a) is an illustration showing such a situation that piezoelectric actuators are not energized (contracted) and therefore gates for a phase are opened, and FIG. 13(b) is an illustration showing such a situation that the piezoelectric actuators are energized (expanded) and thereby the gates for the phase are closed.

In these figures, reference numeral 81 represents a substrate, reference numeral 82 represents rubber, reference numeral 83 represents a driven plate, reference numeral 84 represents the piezoelectric actuators, reference numeral 85 represents a fixed plate, and reference numerals 86a-86d represent a plurality of the gates.

As shown in these figures, a plurality of the gates **86a-86d** are arranged, and all the gates for the phase can be closed by the operation of the two piezoelectric actuators **84** disposed at both sides.

Various actuators may be used instead of the above actuators.

FIG. **14** is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to a ninth embodiment of the present invention. FIG. **14(a)** is an illustration showing such a situation that a bimorph actuator is not energized (not warped) and therefore gates for a phase are opened, and FIG. **14(b)** is an illustration showing such a situation that the bimorph actuator is energized (warped downward) and thereby the gates for the phase are closed.

In these figures, reference numeral **91** represents a substrate, reference numeral **92** represents rubber, reference numeral **93** represents the bimorph actuator, and reference numerals **94a-94d** represent a plurality of the gates.

As shown in these figures, a plurality of the gates **94a-94d** are arranged, and all the gates can be closed at the same time by the operation of the bimorph actuator **93**.

FIG. **15** is an illustration showing a mechanism for opening or closing a dispersion phase-feeding port of a microdroplet-producing apparatus according to a tenth embodiment of the present invention. FIG. **15(a)** is an illustration showing such a situation that an electrostrictive polymer is not energized and therefore gates for a phase are opened, and FIG. **15(b)** is an illustration showing such a situation that the electrostrictive polymer is energized (contracted) and thereby the gates for the phase are closed.

In these figures, reference numeral **101** represents a substrate, reference numeral **102** represents a driven plate, reference numeral **103** represents the electrostrictive polymer, and reference numerals **104a-104d** represent a plurality of the gates.

As shown in FIG. **15(a)**, a plurality of the gates **104a-104d** are opened when the electrostrictive polymer **103** is not energized (expanded). As shown in FIG. **15(b)**, a plurality of the gates **104a-104d** are closed at the same time when the electrostrictive polymer **103** is energized (contracted).

FIG. **16** is a plan view showing an emulsion-producing apparatus according to an eleventh embodiment of the present invention. FIG. **16(a)** is a plan view showing the emulsion-producing apparatus to which a dispersion phase has not been introduced yet, FIG. **16(b)** is a plan view showing the emulsion-producing apparatus to which liquid has been charged, and FIG. **16(c)** is an illustration showing such a situation that a large droplet is set for the emulsion-producing apparatus and microdroplets (emulsion) are produced due to a moving electric field induced by static electricity.

In these figures, reference numeral **111** represents a substrate, reference numeral **112** represents electrodes disposed on the substrate **111**, reference numeral **113** represents a microchannel disposed above the substrate **111** having the electrodes **112** thereon, reference numeral **114** represents a dispersion phase, and reference numeral **115** represents an emulsion formed by causing the dispersion phase **114** to pass through the microchannel **113**.

In this embodiment, the electrodes **112** are arranged to be perpendicular to the microchannel **113**, and a moving electric field is applied to the electrodes **112**, thereby forming the emulsion **115**. The emulsion **115** is guided in the direction perpendicular to the electrodes (in the downward direction herein) depending on the moving electric field induced by the static electricity applied to the electrodes. **112**.

The rate of forming the microdroplets can be changed by varying the moving speed of the moving electric field.

FIG. **17** is a plan view showing an emulsion-producing apparatus according to a twelfth embodiment of the present invention. FIG. **17(a)** is a plan view showing the emulsion-producing apparatus to which a dispersion phase has not been introduced yet, and FIG. **17(b)** is an illustration showing such a situation that the dispersion phase is introduced to the emulsion-producing apparatus, thereby forming an emulsion.

In these figures, reference numeral **121** represents a substrate, reference numeral **122** represents electrodes disposed on the substrate **121**, reference numeral **123** represents a microchannel disposed above the substrate **121** having the electrodes **122** thereon, reference numeral **124** represents a dispersion phase, and reference numeral **125** represents an emulsion formed by causing the dispersion phase **124** to pass through the microchannel **123**.

In this embodiment, on the exit side of the microchannel **123**, the electrodes **122** are vertically arranged and thereby the formed emulsion **125** is guided in the horizontal direction depending on a static electricity applied to the electrodes **122**.

FIG. **18** is an illustration showing an emulsion-forming apparatus according to a thirteenth embodiment of the present invention. FIG. **18(a)** is a schematic view showing the total configuration of the monodispersed emulsion-forming apparatus, and FIG. **18(a-1)** is the left side elevational view thereof, FIG. **18(a-2)** is a schematic plan view thereof, FIG. **18(a-3)** is the right side elevational view thereof. FIG. **18(b)** is an illustration showing a first junction, and FIG. **18(c)** is an illustration showing a second junction.

In these figures, reference numeral **131** represents a main body of the emulsion-forming apparatus, reference numeral **132** represents a microchannel in which a dispersion phase flows, reference numeral **133** represents a microchannel in which a first continuous phase flows, reference numeral **134** represents a microchannel in which a second continuous phase flows, reference numeral **135** represents the first junction at which flows of the dispersion phase and the first continuous phase are joined together, reference numeral **136** represents the second junction at which flows of the dispersion phase, the first continuous phase, and the second continuous phase are joined together, reference numeral **137** represents the first continuous phase, reference numeral **138** represents the dispersion phase, reference numeral **139** represents the second continuous phase, and reference numeral **140** represents a formed emulsion.

In this embodiment, the flows of the dispersion phase **138** and the first continuous phase **137** are joined together at the first junction **135**, thereby forming a two-phase flow containing the first continuous phase **137** and the dispersion phase **138**. At the second junction **136**, a flow of the second continuous phase **139** and the two-phase flow containing the first continuous phase **137** and the dispersion phase **138** are joined together, and thereby the emulsion **140** is formed from the dispersion phase **138**.

According to this embodiment, there is an advantage in that an emulsion having a size smaller than the width of channels can be readily formed.

FIG. **19** is an illustration showing a microcapsule-forming apparatus according to a fourteenth embodiment of the present invention. FIG. **19(a)** is a schematic view showing the total configuration of the microcapsule-forming apparatus, and FIG. **19(a-1)** is the left side elevational view thereof, FIG. **19(a-2)** is a schematic plan view thereof, FIG. **19(a-3)** is the right side elevational view thereof. FIG. **19(b)** is an illustration showing a first junction, and FIG. **19(c)** is an illustration showing a second junction.

In these figures, reference numeral **141** represents a main body of the microcapsule-forming apparatus, reference numeral **142** represents a microchannel in which a dispersion phase (for example, water) flows, reference numeral **143** represents a microchannel in which a first continuous phase (for example, oil) flows, reference numeral **144** represents a microchannel in which a second continuous phase (for example, water) flows, reference numeral **145** represents the first junction at which flows of the dispersion phase and the first continuous phase are joined together, reference numeral **146** represents the second junction at which flows of the dispersion phase, the first continuous phase, and the second continuous phase are joined together, reference numeral **147** represents the first continuous phase, reference numeral **148** represents the dispersion phase, reference numeral **149** represents an emulsion (for example, water), reference numeral **150** represents the second continuous phase, and reference numeral **151** represents formed microcapsules. The microcapsules **151** can contain one or more emulsions **149**.

FIG. **20** is an illustration showing a configuration of an apparatus of the present invention, wherein the apparatus can be used for forming a large amount of microdroplets (emulsion/microcapsules) using the elastic deformation of rubber. FIG. **21** is an illustration showing the operation of a first forming apparatus therefor.

In these figures, reference numeral **160** represents a linear motor, reference numeral **161** represents a liquid chamber, reference numeral **162** represents a cover, reference numeral **163** represents a dispersion phase, reference numeral **164** represents an upper stainless plate, reference numeral **165** represents a rubber member, reference numeral **166** represents a lower stainless plate, reference numeral **167** represents microchannels, reference numeral **168** represents a continuous phase, and reference numeral **169** represents a formed emulsion (microdroplets). Another actuator including a piezoelectric actuator may be used instead of the linear motor **160** functioning as an actuator.

When the linear motor **160** is operated to apply a pressure to the liquid chamber **161** (see FIG. **21(a)**), to which a back pressure is applied, from above, the rubber member **165** disposed between the upper stainless plate **164** and the lower stainless plate **166** is pressed (see FIG. **21(b)**) and thereby part of the dispersion phase **163** is separated and then ejected from each microchannel **167**, thereby forming the microdroplets **169**. In this configuration, since a large number of the microchannels **167** extend through the upper stainless plate **164**, the rubber member **165**, and the lower stainless plate **166**, a large amount of the microdroplets **169** can be readily produced by the operation of the linear motor **160** at a time.

FIG. **22** is an illustration showing the operation of a second apparatus, shown in FIG. **20**, for forming a large amount of microdroplets.

In this embodiment, a plurality of the microchannels **167** each have a narrow section **167B** having a tapered portion **167A** formed by narrowing a lower channel portion.

When the linear motor **160** is operated to apply a pressure to the liquid chamber **161** (see FIG. **22(a)**), to which a back pressure is applied, from above, the rubber member **165** disposed between the upper stainless plate **164** and the lower stainless plate **166** is pressed from above (see FIG. **22(b)**) and thereby part of the dispersion phase **163** is separated and then ejected from each microchannel **167**, thereby forming the microdroplets **169**. In this configuration, since each microchannel **167** has the narrow lower portion having each tapered portion **167A**, the microdroplets **169** can be efficiently ejected in the downward direction.

FIG. **23** is an illustration showing the operation of a third apparatus, shown in FIG. **20**, for forming a large amount of microdroplets.

In this embodiment, a plurality of the microchannels **167** each have a narrow section **167E** that has a first tapered portion **167C** formed by narrowing a lower channel portion and a second tapered portion **167D** formed by expanding a further lower channel portion.

When the linear motor **160** is operated to apply a pressure to the liquid chamber **161** (see FIG. **23(a)**), to which a back pressure is applied, from above, the rubber member **165** disposed between the upper stainless plate **164** and the lower stainless plate **166** is pressed from above (see FIG. **23(b)**) and thereby part of the dispersion phase **163** is separated and then ejected from each microchannel **167**, thereby forming microdroplets **169'**. In this configuration, each microdroplet **169'** is separated at each microchannel **167** having the first tapered portion **167C**, and the microdroplet **169'** formed by separating part of the dispersion phase is guided along the second tapered portion **167D** in the downward direction and then efficiently ejected.

The present invention is not limited to the above embodiments, and various modifications may be performed within the scope of the present invention. The present invention covers such modifications.

As described above in detail, according to the present invention, an emulsion and microcapsules can be rapidly formed in a simple manner.

Furthermore, the formed emulsion can be guided in a predetermined direction and the rate of forming the emulsion can be varied.

Furthermore, the emulsion can be produced in a large scale.

#### INDUSTRIAL APPLICABILITY

According to a process and apparatus for producing an emulsion and microcapsules according to the present invention, an emulsion and microcapsules can be rapidly formed in a simple manner. Such a process and apparatus are fit for the field of drug production and biotechnology.

The invention claimed is:

1. A process for producing an emulsion, comprising:
  - ejecting a dispersion phase towards a junction of flows of a first continuous phase and a second continuous phase, wherein a flow of the dispersion phase joins the flows of the first and second continuous phases to form the emulsion,
    - wherein:
      - the first continuous phase is ejected from a first microchannel,
      - the second continuous phase is ejected from a second microchannel,
      - the first and second microchannels substantially oppose each other,
      - the dispersion phase is ejected from a dispersion phase feeding channel,
      - the first and second microchannels are substantially perpendicular to the dispersion phase feeding channel, and
      - a part of the flow of the first and second continuous phases enters into the dispersion phase feeding channel.
  2. The process for producing an emulsion according to claim 1 wherein the dispersion phase is ejected approximately perpendicular to each of the flows of the first and second continuous phases.
  3. The process for producing an emulsion according to claim 2 wherein the dispersion phase ejected approximately perpendicular to each of the flows of the first and second continuous phases is arranged along with the flows of the first and second continuous phases at multiple positions.

\* \* \* \* \*